



Ballscrews



Features of PMI Ballscrews

High reliability

PMI has accumulated many years experience in production managing. It covers the whole production sequence, from receiving the order, designing, material preparation, machining, heat treating, grinding, assembling, inspection, packaging and delivery. The systemized managing ensures high reliability of PMI Ballscrews.

High accuracy

PMI Ballscrews are machined, ground, assembled and Q.C. inspected under the constant temperature control (20°C) to ensure high precision of Ballscrews. Fig.1 accuracy inspection certificate. The ground ball screw which accuracy grade is C5 or above, will attach an accuracy certificate of inspection.

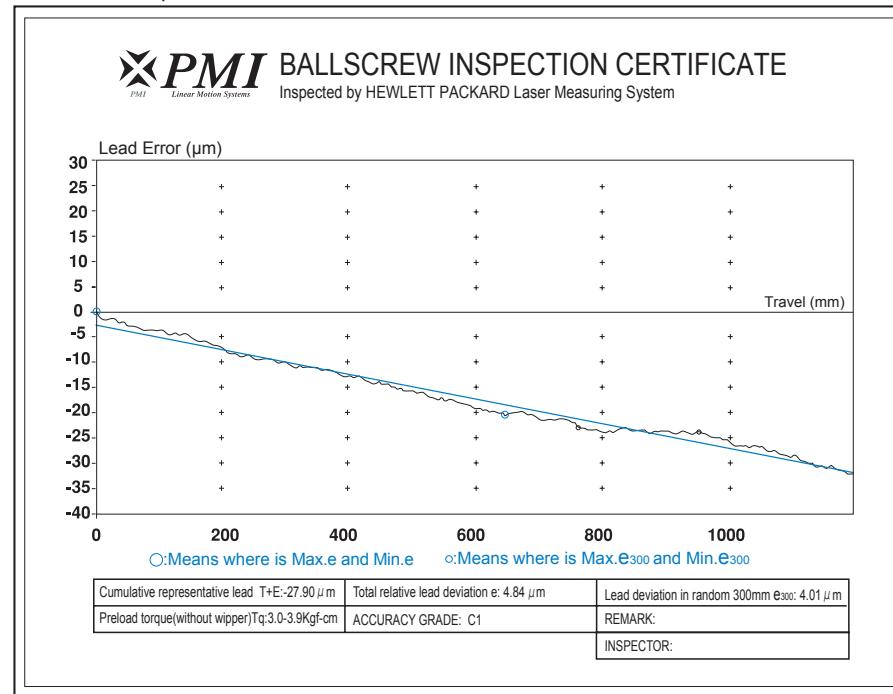


Fig.1 Accuracy inspection certificate.

Long durability

PMI Ballscrews are Alloy steels, which are well quenching and tempering treated for good rigidity, along with suitable surface hardening to ensure long durability.

High working efficiency

Balls are rotating inside the Ballscrew nut to offer high working efficiency. Comparing with the traditional ACME screws, which work by friction sliding between the nut and screw, the Ballscrews needs only 1/3 of driving torque. It is easy to transmit linear motion into rotation motion.

No backlash and with high rigidity

The Gothic profile is applied by PMI Ballscrews. It offers best contact between balls and the grooves. If suitable preload is exerted on Ballscrew hence to eliminate clearance between the ball nut and screw and to reduce elastic deformation, the ballscrew shall get much better rigidity and accuracy.

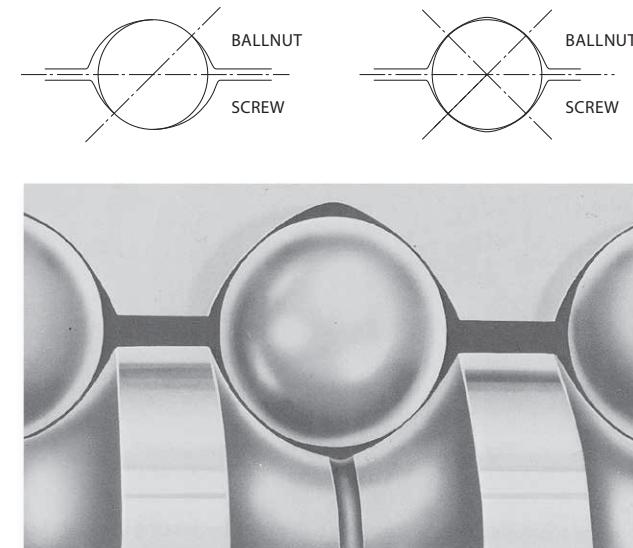


Fig.2 Gothic arch thread

Lead Accuracy and Torque

Lead Accuracy

PMI's precision ground Ballscrews are controlled in accordance with JIS B 1192.

The permissible values and each part of definitions are shown below.

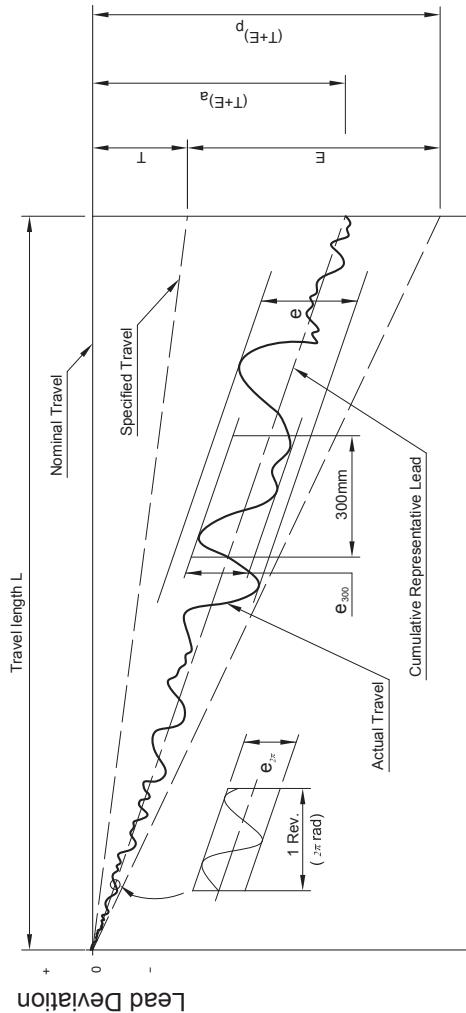


Fig.3 Technical Terms Concerning the Lead

Table 1 Terms

T+E	Cumulative representative lead. A straight line representing the tendency of the cumulative actual lead. This is obtained by least square method and measured by laser system.
P	Permissible value.
a	Actual value.
T	Specified travel. This value is determined by customer and maker as it depends on different application requirements.
E	Accumulated reference lead deviation. This is allowable deviation of specified travel. It is decided by both of the accuracy grade and effective thread length.
e	Total relative lead variation Maximum width of variation over the travel length.
e₃₀₀	Lead deviation in random 300 mm.
e_{2π}	Lead deviation in random 1 revolution 2π rad.

Table 2 Accumulated reference lead deviation ($\pm E$) and total relative variation (e)

	GRADE		C0		C1		C2		C3		C4		C5		Unit: μm
	OVER	UPTO	E	e	E	e	E	e	E	e	E	e	E	e	
-	315	4	3.5	6	5	8	7	12	8	12	12	23	18		
315	400	5	3.5	7	5	9	7	13	10	14	12	25	20		
400	500	6	4	8	5	10	7	15	10	16	12	27	20		
500	630	6	4	9	6	11	8	16	12	18	14	30	23		
630	800	7	5	10	7	13	9	18	13	20	14	35	25		
800	1000	8	6	11	8	15	10	21	15	22	16	40	27		
1000	1250	9	6	13	9	18	11	24	16	25	18	46	30		
1250	1600	11	7	15	10	21	13	29	18	29	20	54	35		
1600	2000	-	-	18	11	25	15	35	21	35	22	65	40		
2000	2500	-	-	22	13	30	18	41	24	41	25	77	46		
2500	3150	-	-	26	15	36	21	50	29	50	29	93	54		
3150	4000	-	-	32	18	44	25	60	35	62	35	115	65		
4000	5000	-	-	-	-	52	30	72	41	76	41	140	77		
5000	6300	-	-	-	-	65	36	90	50	95	50	170	93		
6300	8000	-	-	-	-	-	-	110	62	120	62	210	115		
8000	10000	-	-	-	-	-	-	137	75	157	75	260	140		

Table 3 Accuracy grade

Variation in random 300mm (\mathbf{e}_{300}) and wobble ($\mathbf{e}_{2\pi}$)

\mathbf{e}_{300}	Unit: μm									
GRADE	C0	C1	C2	C3	C4	C5	C6	C7	C10	
JIS	3.5	5	-	8	-	18	-	50	210	
ISO	3.5	6	-	12	-	23	-	52	210	
DIN	-	6	-	12	-	23	-	52	210	
PMI	3.5	5	7	8	12	18	25	50	210	

$\mathbf{e}_{2\pi}$	Unit: μm					
GRADE	C0	C1	C2	C3	C4	C5
JIS	3	4	-	6	-	8
ISO	3	4	-	6	-	8
DIN	-	4	-	6	-	8
PMI	3	4	4	6	8	8

Table 4 Accuracy grades of ball screw and their application

Application	Name of axis	Accuracy grade								
		C0	C1	C2	C3	C4	C5	C6	C7	C10
Lathe	X	●	●	●	●	●	●			
	Z				●	●	●			
Machining center	X,Y		●	●	●	●	●			
	Z			●	●	●	●			
Drilling machine	X,Y				●	●	●			
	Z							●	●	●
Milling machine Boring machine	X,Y		●	●	●	●	●			
	Z			●	●	●	●			
Jig boring machine	X,Y	●	●							
	Z	●	●							
Grinder	X,Y	●	●	●						
	Z		●	●	●					
Electric discharge machine	X,Y		●	●	●					
	Z			●	●	●	●			
Wire cutting Electric discharge machine	X,Y		●	●	●					
	Z		●	●	●	●				
Punch press	X,Y			●	●	●	●			
Laser cutting machine	X,Y			●	●	●				
	Z			●	●	●				
Woodworking machine						●	●	●	●	
General industrial machines Machines for specific use				●	●	●	●	●	●	

Industrial robots	Application	Name of axis	Accuracy grade								
			C0	C1	C2	C3	C4	C5	C6	C7	C10
	Cartesian type	Assembly			●	●	●	●	●	●	●
		other purposes					●	●	●	●	●
	Articulate type	Assembly				●	●	●	●	●	●
		other purposes					●	●	●	●	●
	SCARA type			●	●	●	●	●	●	●	●
Lithographic machine			●	●							
Chemical processing equipment						●	●	●	●	●	●
Wire bonder					●	●					
Prober			●	●	●						
Printed circuit board drilling machine				●	●	●	●	●	●		
Electric component mounted device					●	●	●	●	●		
Three-dimensional coordinate measuring machine			●	●	●						
Office machine							●	●	●	●	●
Image processing machine			●	●							
Plastic injection molding machine									●	●	
Steel mills equipment									●	●	
Nuclear power	Fuel rod control				●	●	●	●	●	●	
	Mechanical snubber									●	●
Aircraft				●	●	●					

Preloading Torque

The preloading torque of the Ballscrew is controlled in accordance with JIS B 1192.

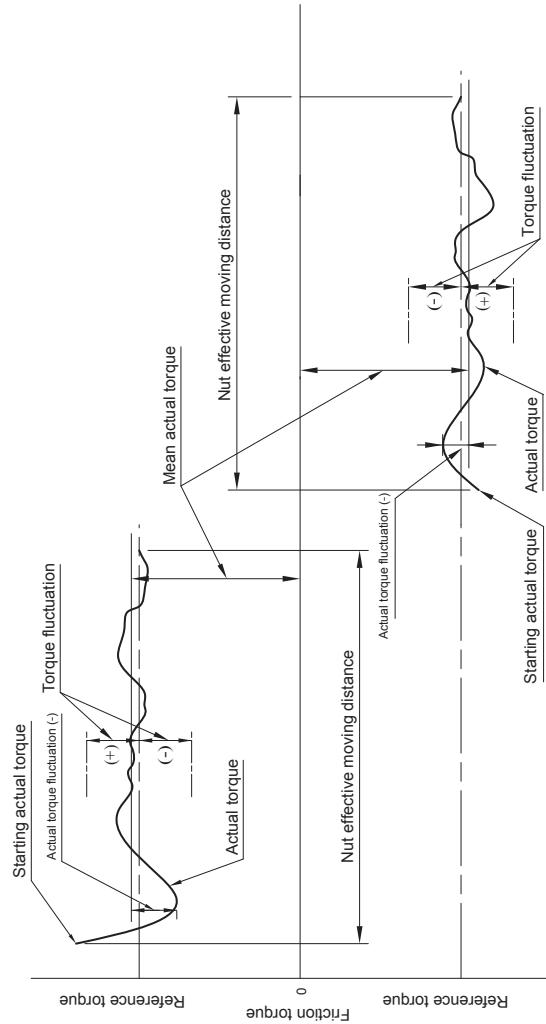


Fig.4 Technical terms concerning preload

Preload	The purpose of preload is to eliminate axial play and increase rigidity of Ballscrew. Reference to A1-12 Ballscrew's preload and effect.
Preload torque	Torque needed to continuously turn a Ballscrew with preload with no other load applied to it.
Reference torque	Preload torque set as a goal.
Torque fluctuation	Fluctuation from a goal value of the preload torque. Defined as positive or negative in respect to the reference torque.
Rating of torque fluctuation	Rating on reference torque and torque fluctuation.
Actual torque	Preloaded dynamic torque measured by using an actual value of Ballscrew.
Mean actual torque	In the effective thread length, the net reciprocate to measure the maximum actual torque and minimum actual torque are doing count mean.
Actual torque fluctuation	In the effective thread length, the net reciprocate to measure the maximum fluctuant value.
Rating of Actual torque fluctuation	Rating on mean actual torque and actual torque fluctuation.

Table 5 Allowable range of preload torque

Reference torque (kgf.cm)		Effective Thread Length (mm)										
		up to and incl. 4000								over 4000 up to and incl. 10000.		
		Slenderness ratio: up to and incl. 40				Slenderness ratio: over 40 up to and incl. 60						
		Accuracy grade				Accuracy grade				Accuracy grade		
OVER	OR LESS	C0	C1	C3	C5	C0	C1	C3	C5	C1	C3	C5
2	4	±30%	±35%	±40%	±50%	±40%	±40%	±50%	±60%	-	-	-
4	6	±25%	±30%	±35%	±40%	±35%	±35%	±40%	±45%	-	-	-
6	10	±20%	±25%	±30%	±35%	±30%	±30%	±35%	±40%	-	±40%	±45%
10	25	±15%	±20%	±25%	±30%	±25%	±25%	±30%	±35%	-	±35%	±40%
25	63	±10%	±15%	±20%	±25%	±20%	±20%	±25%	±30%	-	±30%	±35%
63	100	-	±15%	±15%	±20%	-	-	±20%	±25%	-	±25%	±30%

Note: Slenderness Ratio: Effective Thread Length/Screw Nominal O.D.

Reference torque

$$T_P = 0.05 (\tan \beta)^{-0.5} \times \frac{Fao \times l}{2\pi} \quad \dots \dots \dots \quad (1)$$

Here

T_P Reference torque ($kgf\cdot cm$)

l Lead(cm)

Fao Preload

(kgf)

β Lead angle

Tolerances on Various Areas of *PMI* Ballscrew

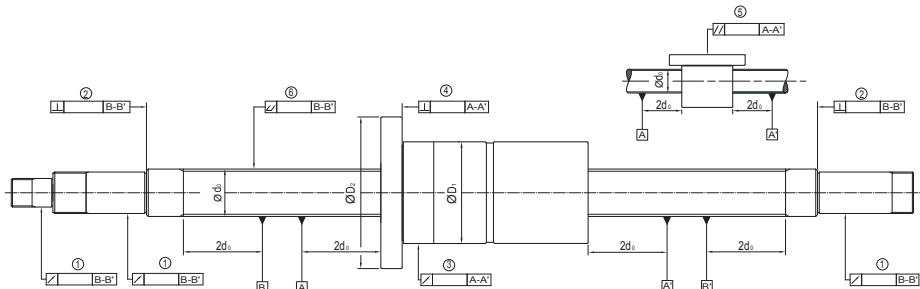


Fig.5

Those on above are samples of accuracy of tolerance on various areas of *PMI* Ballscrew.

⊥ : Perpendicularity ↗ : Radial runout // : Parallel  : Reference

Accuracy on various areas of **PMI** Ballscrew has to measure items:

1. Radial run-out of the circumference of the screw shaft supported portion in respect to the B-B' line.
 2. Perpendicularity of the screw shaft supported portion end face to the B-B' line.
 3. Radial run-out of the nut circumference in respect to the A-A' line.
 4. Perpendicularity of the flange mounting surface to the A-A' line.
 5. Parallelism between the nut circumference to the A-A' line.
 6. Overall radial run-out to the A-A' line.

Note: The mounting surface of the Ballscrew is finished to the accuracy specified in JIS B 1192:1997

Standard tolerance of accuracy measuring of ballscrew

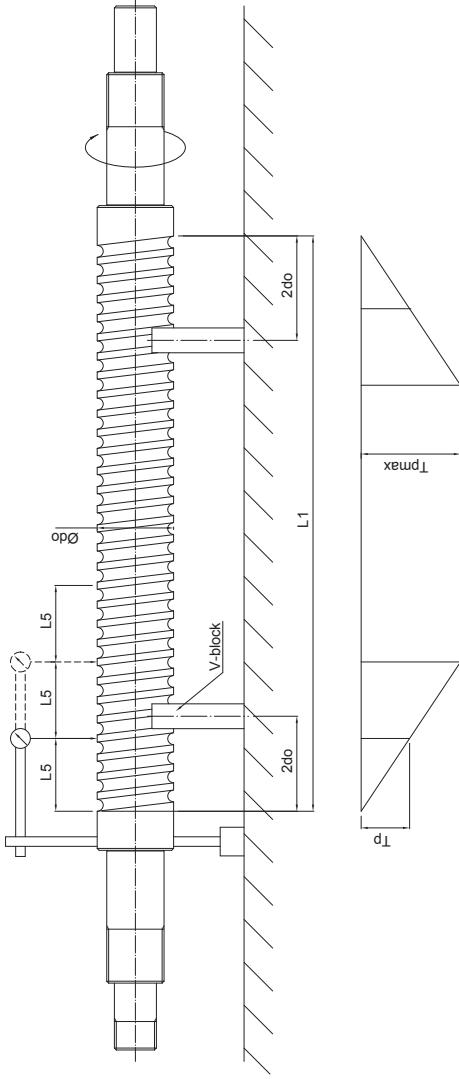


Table 6 Total runout in radial direction of outside diameter of screw shaft threaded part in respect to measuring basic length (measuring basic length is according to DIN 69051 and JIS B1192)

Normal diameter d_o (mm)	Measuring basic length L_s	PMI's Grade t_{max}							Unit: μm
		C0	C1	C2	C3	C4	C5	C6	
above up to and incl.	-	80							
6	12	80							
12	25	160							
25	50	315	20	20	23	25	28	32	
50	100	630							
100	200	1250							
Slenderness ratio L_s/d_o (mm)									
above up to and incl.	C0	C1	C2	C3	C4	C5	C6	C7	C10
-	40	40	40	45	50	60	64	80	160
40	60	60	60	70	75	85	96	120	240
60	80	100	100	115	125	140	160	200	400
80	100	160	160	180	200	220	256	320	640

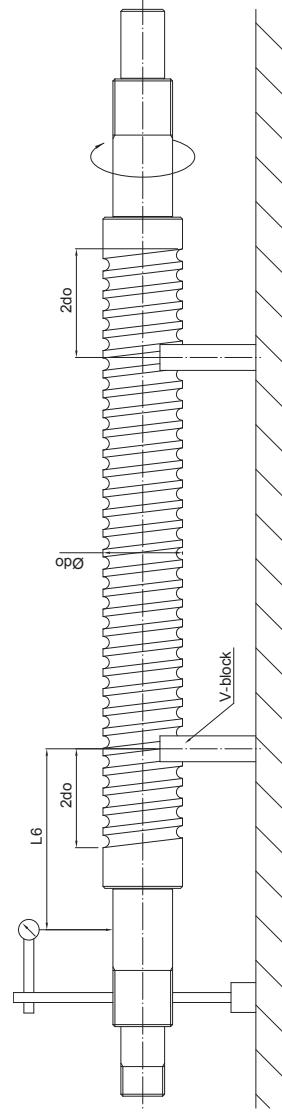


Table 7 Circumferential runout in radial direction of outside diameter of mounting part of parts in respect to threaded part axial line of screw shaft (measuring basic length is according to DIN 69051 and JIS B1192)

Normal diameter d_o (mm)	Measuring basic length L_r	PMI's Grade t_{max}							Unit: μm	
		C0	C1	C2	C3	C4	C5	C6		
above up to and incl.	-	80	6	8	10	11	12	16	20	
6	20	80								
20	50	125	8	10	12	14	16	20	25	
50	125	200	10	12	16	18	20	26	32	
125	200	315	-	-	20	25	32	40	80	125

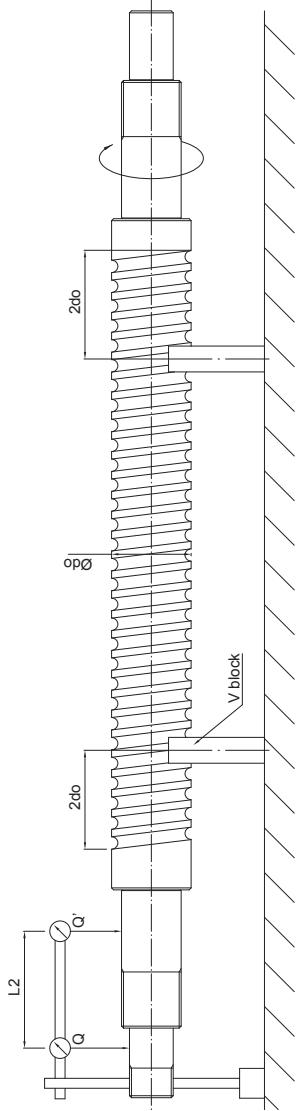


Table 8 Perpendicularity on supporting-part end face in respect to the threaded part axial line of screw shaft
(measuring basic length is according to DIN 69051 and JIS B1192)(Difference of maximum value within Q and Q')
Unit: μm

Normal diameter d_o (mm)		Measuring basic length L_r	PMIs' Grade ($l_{1,2} \leq L_r$)								
above	up to and incl.		-	C0	C1	C2	C3	C4	C5	C6	C7
6	20	80	4	5	5	6	6	7	8	12	16
20	50	125	5	6	6	7	8	9	10	16	20
50	125	200	6	7	8	9	10	11	12	20	25
125	200	315	-	-	10	12	14	16	25	32	

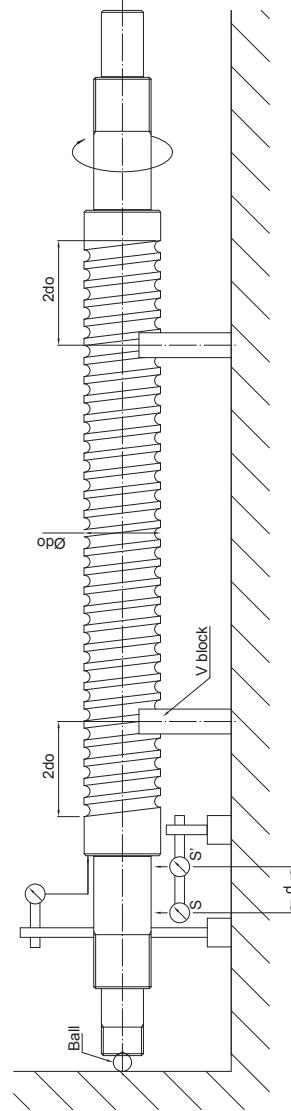


Table 9 Perpendicularity on supporting-part end face in respect to the threaded part axial line of screw shaft
(measuring basic length is according to DIN 69051 and JIS B1192)
(the value of deflection supports two ends deflection of difference between S and S')
Unit: μm

Normal diameter d_o (mm)		Measuring basic length L_r	PMIs' Grade								
above	up to and incl.		C0	C1	C2	C3	C4	C5	C6	C7	C10
6	63	3	3	3	4	4	4	5	5	6	10
63	125	3	4	4	5	5	6	6	6	8	12
125	200	-	-	-	6	6	8	8	8	10	16

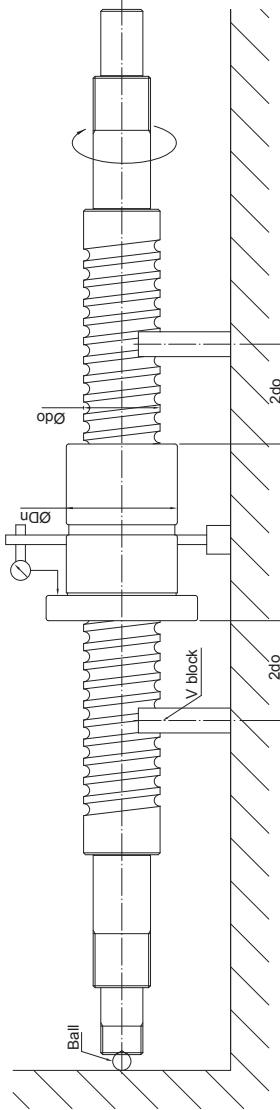


Table 10 Perpendicularity on mounting face of flang of nut
(measuring basic length is according to DIN 69051 and JIS B1192)

Outside diameter of nut D_n	PMI's Grade									
	above up to and incl.	C0	C1	C2	C3	C4	C5	C6	C7	C10
-	20	5	6	7	8	9	10	12	14	-
20	32	5	6	7	8	9	10	12	14	-
32	50	6	7	8	8	10	11	15	18	-
50	80	7	8	9	10	12	13	16	18	-
80	125	7	9	10	12	14	15	18	20	-
125	160	8	10	11	13	15	17	19	20	-
160	200	-	11	12	14	16	18	22	25	-
200	250	-	12	14	15	18	20	25	30	-

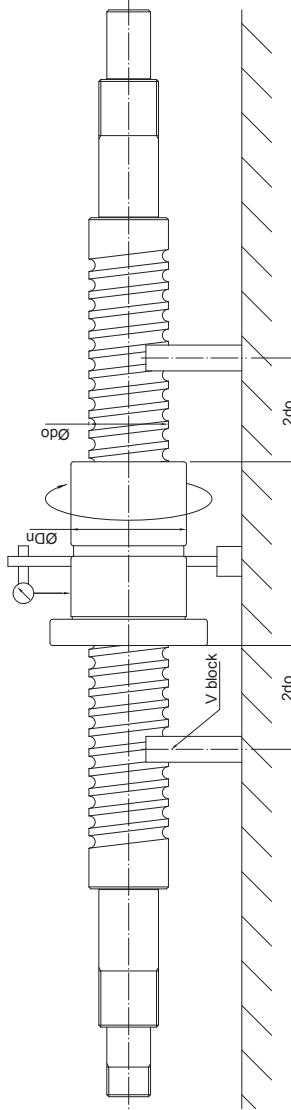
Unit: μm 

Table 11 Circumferential runout in radial direction on outer peripheral face of nut
(measuring basic length is according to DIN 69051 and JIS B1192)

Outside diameter of nut D_n	PMI's Grade									
	above up to and incl.	C0	C1	C2	C3	C4	C5	C6	C7	C10
-	20	5	6	7	9	10	12	16	20	-
20	32	6	7	8	10	11	12	16	20	-
32	50	7	8	10	12	14	15	20	25	-
50	80	8	10	12	15	17	19	25	30	-
80	125	9	12	16	20	21	22	25	40	-
125	160	10	13	17	22	25	28	32	40	-
160	200	-	16	20	22	25	28	32	40	-
200	250	-	17	20	22	25	28	32	40	-

Unit: μm

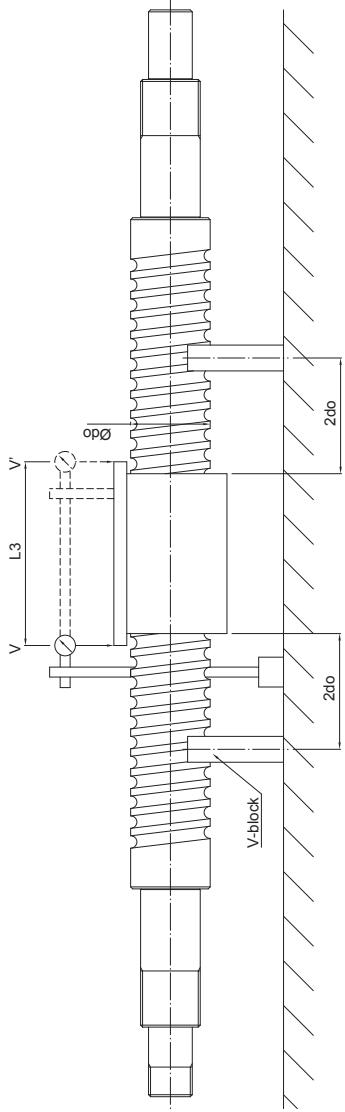


Table 12 Parallelism on outer peripheral face of nut
($V-V'$)/(measuring basic length) is according to DIN 69051 and JIS B1192

		PMI's Grade							
		Basic length L_1							
		C_0	C_1	C_2	C_3	C_4	C_5	C_6	C_7
-	50	5	6	7	8	9	10	14	17
50	100	6	7	8	10	11	12	15	17
100	200	-	10	11	13	15	17	24	30

Unit: μm

Design of Screw Shaft

Production Limit Length of Screw Shaft

Production limit length of precision ground Ballscrew:

When screw shaft O.D. is 4 mm, Limit length of Ballscrew is 150 mm.

When screw shaft O.D. is 120 mm, Limit length of Ballscrew is 10000 mm.

Note: Please contact with our sales people in case a special type is required.

Production limit length of rolled Ballscrew:

When screw shaft O.D. is 8 mm, Limit length of Ballscrew is 1000 mm.

When screw shaft O.D. is 80 mm, Limit length of Ballscrew is 6000 mm.

Note: Please contact with our sales people in case a special type is required.



Mounting Method

The permissible axial load and permissible rotational speed vary with the screw-shaft mounting method used, so the mounting method should be determined in accordance with the operating conditions.

Fig.6~8 illustrate a typical method for mounting a screw shaft.

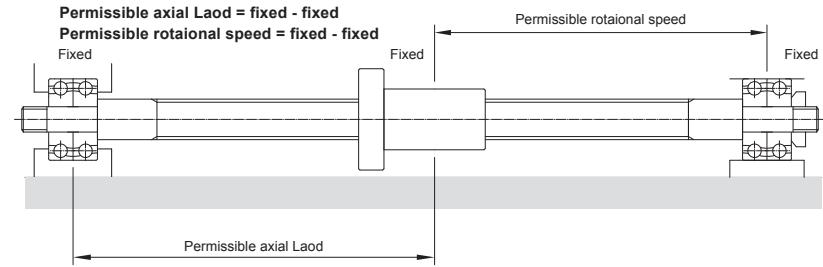


Fig.6 Mount method : fixed-fixed

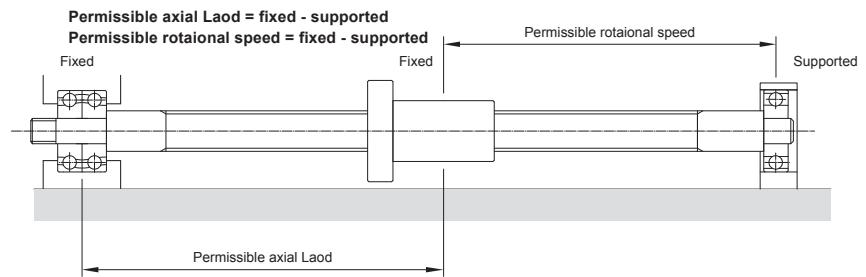


Fig.7 Mount method : fixed-supported

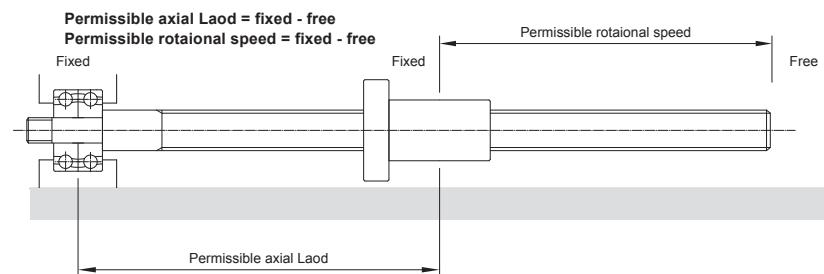


Fig.8 Mount method : fixed-free

Permissible Axial Load

Buckling load

The Ballscrew to be used should not buckle under the maximum compressive load applied in its axial direction. The buckling load can be calculated by using equation (2).

$$P = \alpha \frac{\pi^2 NEI}{L^2} = m \frac{dr^4}{L^2} \times 10^3 \quad (\text{kgs}) \quad \dots\dots\dots(2)$$

Here:

- α Safety factor ($\alpha=0.5$)
- E Young's modulus ($E=2.1 \times 10^4 \text{ kgs/mm}^2$)
- I Minimum geometrical moment of inertia of the screw shaft cross section ($I=\pi dr^4/64 \text{ mm}^4$)
- dr Screw shaft thread minor diameter (mm)
- L Distance between mounting positions (mm)
- m, N Coefficient depending on the mounting method
 - supported-supported $m=5.1$ ($N=1$)
 - fixed-supported $m=10.2$ ($N=2$)
 - fixed-fixed $m=20.3$ ($N=4$)
 - fixed-free $m=1.3$ ($N=1/4$)

Permissible tensile-compressive load of the screw shaft

Where the axial load is exerted on the Ballscrew, the screw shaft to be used should be determined in consideration of the permissible tensile-compressive load that can exert yielding stress on the screw shaft.

The permissible tensile-compressive load can be calculated using equation (3).

- Permissible tensile-compressive load of yield stress of screw shaft

$$P = \sigma \cdot A = \sigma \cdot \pi \cdot dr^2/4 \quad \dots\dots\dots(3)$$

Here:

- σ Permissible tensile-compressive stress (147 MPa)
- A Cross section area of root diameter of screw shaft (mm^2)
- dr Screw-shaft thread minor diameter (mm)

- Permissible Load of contact point of ball groove

The maximal axial load must be less than the basic static rate load of the ball screw shaft. For more details please see A1-56, Permissible Load on Thread Grooves.

Fig. Value shown(outer diameter of screw shaft-lead)

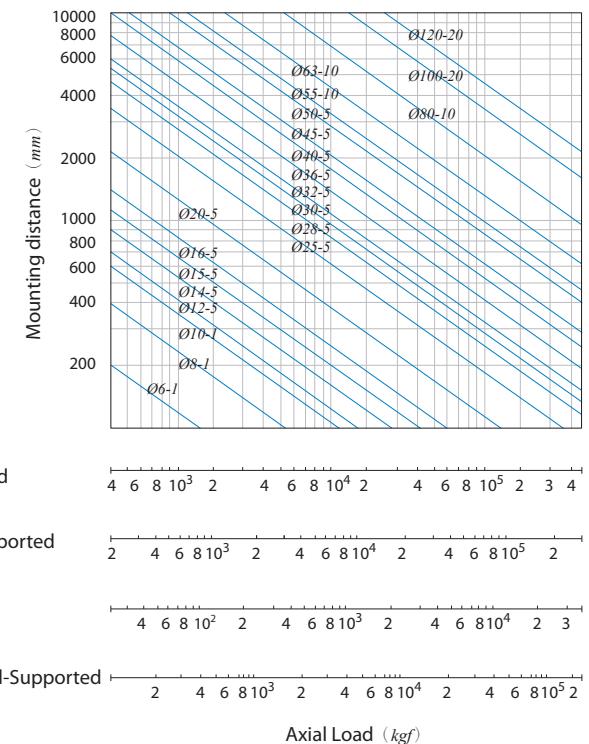


Fig.9 Permissible Axial Load

Permissible Rotational Speed

Critical rotation speed

When the rotation speed of driving motor coincides with the natural frequency of feed system (mainly the ballscrew), the resonance of vibration shall be triggered. This rotation speed is then called critical rotation speed. It shall make bad quality machining, since there is wave shape surface on the workpiece. It may also cause damage of machine. Hence it is very important to prevent the resonance of vibration from happening. We choose 80% of critical rotation speed as allowable speed. It is shown as formula (4).

It may be required to have additional supports in between the ends bearing supports to make the natural frequency of Ballscrew to be higher and hence to raise the allowable rotation speed.

$$n = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{EIg}{rA}} = f \frac{dr}{L^2} \times 10^7 \text{ (rpm)} \dots\dots\dots(4)$$

Here:

n Permissible rational speed (rpm)

α Safety factor ($\alpha=0.8$)

E Young's modulus ($E=2.1\times 10^4 \text{ kgf/mm}^2$)

I Minimum geometrical moment of inertia of the screw-shaft cross section ($I=\pi dr^4/64 \text{ mm}^4$)

dr Screw-shaft thread minor diameter (mm)

A Screw shaft cross-sectional area ($A=\pi dr^2/4 \text{ mm}^2$)

L Distance between mounting positions (mm)

g Gravitation acceleration ($g=9.8\times 10^3 \text{ mm/s}^2$)

γ Specific gravity ($\gamma=7.8\times 10^6 \text{ kgf/mm}^3$)

f Coefficient depending on the mounting method

supported-supported $f=9.7$ ($\lambda=\pi$)

fixed-supported $f=15.1$ ($\lambda=3.927$)

fixed-fixed $f=21.9$ ($\lambda=4.730$)

fixed-free $f=3.4$ ($\lambda=1.875$)

dm.n Value of Ballscrew

dm.n is the BCD (ball circle diameter) of screw shaft, and *n* is the maximum rotation speed. The *dm.n* value relates and affects the noise, temperature raise, working life, balls circulation of the ballscrew. In general cases, the *dm.n* value is limited as follows:

Rolled ball screw	Allowable <i>dm.n</i> value	Criterion of permissible rotational speed(min^{-1})
Standard specification(normal lead)	≤ 50000	1500~2000
High-speed specification(large lead)	≤ 70000	2000~2500

Product Specification	Allowable <i>dm.n</i> value		maximum of turning number (standard) [min^{-1}]
	standard	High-speed	
Ground Ball screw	Inner circulation	≤ 70000	2000
	End Deflector	≤ 220000	3000
	Tube type	≤ 80000	2500
	E-type circuit	$\leq 130000, \leq 140000$ ¹	3000
	Heavy load	≤ 130000	≤ 160000 ²
	Heavy load series of end deflector		≤ 120000
	Cap series circuit	≤ 120000	2500

Note: 1.The dm.n value can be reach 130000 in normal case.For some special cases,for example in a fixed ends case, the dm.n value can be as 140000.

2.As lead are 10mm,12mm,14mm and 16mm, the dm.n value ≤ 120000 As lead are 20mm and 25mm, the dm.n value ≤ 160000 .

3.These dm.n values are for reference only. In fact, the dm.n value shall be decided by the ways of end supporting and the distance between them.

4.Please contact with our sales people in case a very high dm.n value is required.

With better manufacturing technology currently, the dm.n value is no longer limited as above. It is even higher than 100,000.

Fig. Value shown(outer diameter of screw shaft-lead)

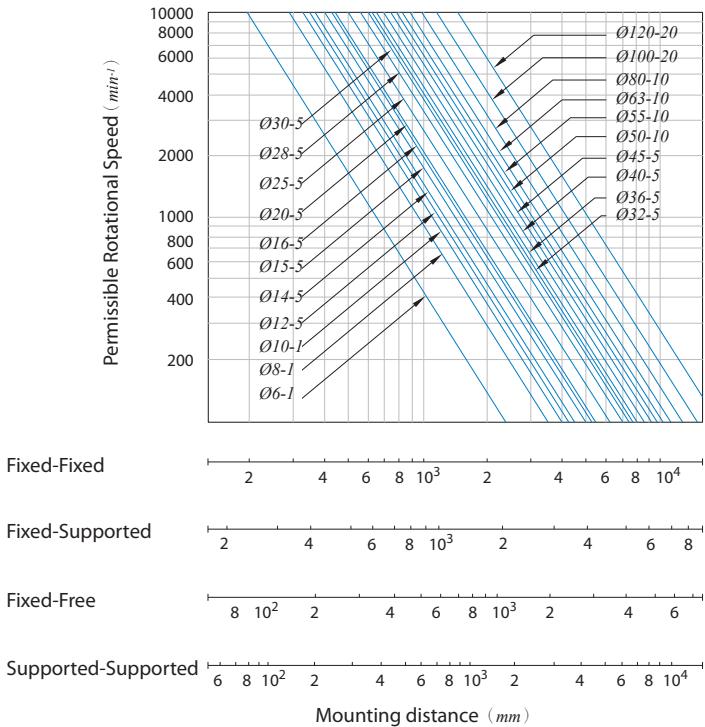


Fig.10 Permissible Rotational Speed

Notes on Screw Shaft

Through end thread

For the Ballscrews with internal ball circulation Ballnut, it is required to have at least one end with complete thread to the end of Ballscrew for Ballnut assembly to screw shaft. If it is impossible for through end thread, it is required to have at least one end with complete thread and the journal area is with diameter to be 0.2mm smaller than the diameter of thread root area.



Fig.11 Incomplete thread



Fig.12 Through end thread

Machine design for the area of Ballnut and ends area of Ballscrew


It is very important to check if there is enough space for assembly of Ballscrew onto the machine during machine design. In some cases, there is not enough space for assembly and the Ballnut has to be disassembled from the screw shaft for easier work. It may cause problems, such as the balls falling out from Ballnut, worse accuracy of squareness and roundout of Ballnut, change of preload and damage to external ball circulating tubes. In some more serious cases, the ballscrew may be damaged and not to be used. Please contact with our people if said above disassembling is required.

Not effective hardened area

The threads on screw shaft are hardened by induction hardening. It shall cause about 15mm at both ends of thread area are not hard enough. It is required to pay attention during machine design for the effective thread length of travel.

Extra support unit for long ballscrew

For a long ballscrew, the bending due to self weight might happen. It may cause radial direction load to ballscrew. The radial direction vibration during rotation might also be more serious. To prevent these problems from happening, it may be required to have extra supports for ballscrew in between the existing supports at both ends. There are two types of supports; one is movable to move along the Ballnut. The other one is fixed type; it is located in a fixed position. The Table must be designed not to hit with this support during moving.

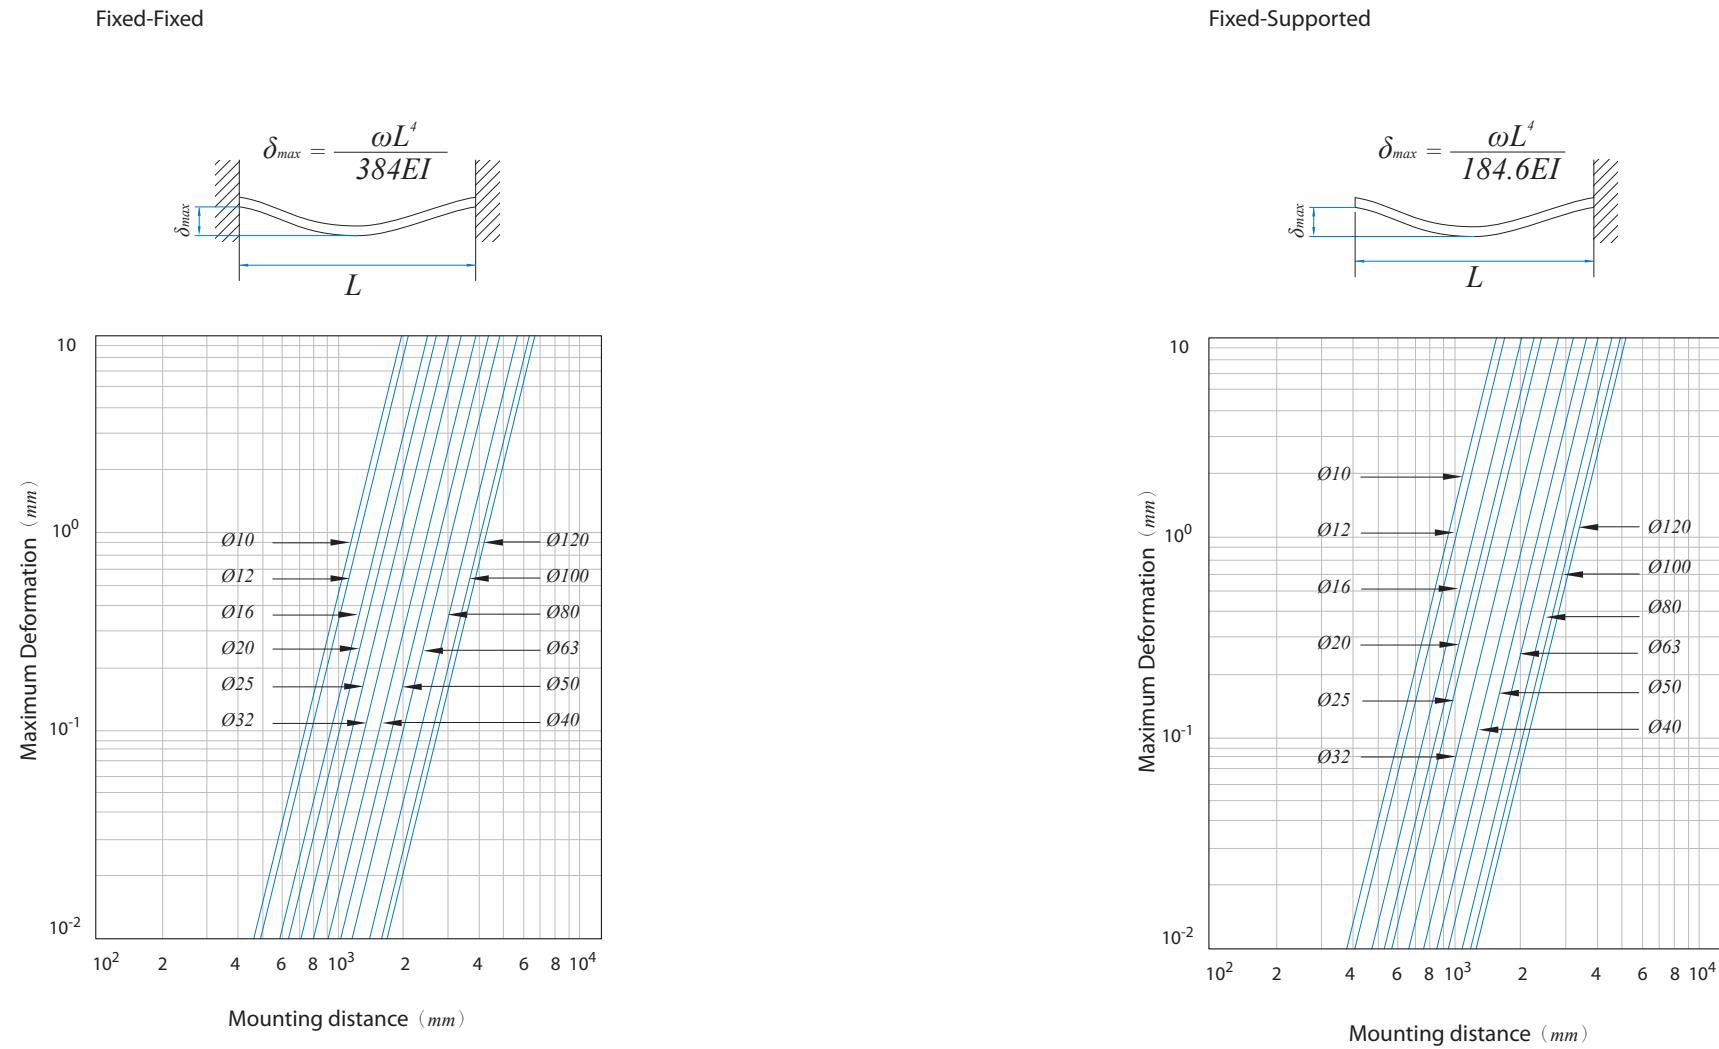

Design of Ball Nut

Selecting the Type of Nut

Type

Selecting the type of Nut, please consider the accuracy; dimension (The length of Nut; internal diameter; external diameter), preload and the date of delivery.

Circulation

External ball circulation

Advantages:

- Lower noise due to longer ball circulation paths
- Offers smoother ball running.
- Offers better solution and quality for long lead or large diameter ballscrews.

Internal ball circulation

Advantages:

- Good for limited space of machine.
- Better structure for small lead or small diameter ballscrews.

Effective turns

Selecting effective turns have to consider required capability; life and rigidity. Refer to the **Table 13**

Flange

PMI have three standard type (A type, B type and C type) Please make selection by area space for nut installation. **PMI** can also make special flange as per customers' requests.

Oil hole

Standard nuts have oil hole. Please dimension in the diagram to manufacture.

Table 13 The character of effective turns

Character	External ball circulation	Internal ball circulation
Motion	1.5circuit ×2row, 1.5circuit ×3row, 2.5circuit ×1row	1circuit ×3row, 1circuit ×4row
Rigidity	2.5circuit ×2row, 2.5circuit ×3row	1circuit ×6row

Calculating the Axial Load

Horizontal reciprocating moving mechanism

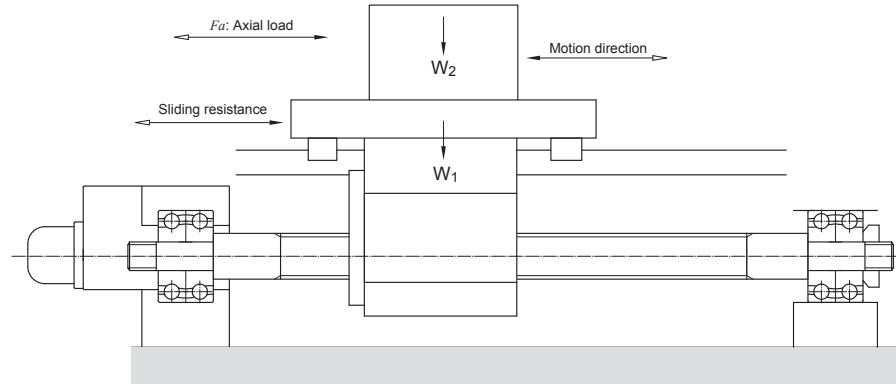


Fig.15 Horizontal reciprocating moving mechanism

For reciprocal operation to move work horizontally (back and forth) in an conveyance system, the axial load (F_a) can be gotten using the following equations:

$$\text{Acceleration (leftward)} \quad F_{a1} = \mu \times mg + f + ma \quad \dots\dots\dots(5)$$

$$\text{Constant speed (leftward)} \quad F_{a2} = \mu \times mg + f \quad \dots\dots\dots(6)$$

$$\text{Deceleration (leftward)} \quad F_{a3} = \mu \times mg + f - ma \quad \dots\dots\dots(7)$$

$$\text{Acceleration (rightward)} \quad F_{a4} = -\mu \times mg - f - ma \quad \dots\dots\dots(8)$$

$$\text{Constant speed (rightward)} \quad F_{a5} = -\mu \times mg - f \quad \dots\dots\dots(9)$$

$$\text{Deceleration (rightward)} \quad F_{a6} = -\mu \times mg - f + ma \quad \dots\dots\dots(10)$$

Here:

a Acceleration

$$a = \frac{V_{max}}{t_a} \quad \frac{V_{max}}{t_a} \quad \begin{matrix} \text{Rapid feed speed} \\ \text{time} \end{matrix}$$

m Total weight (table weight + work piece weight)

μ Friction coefficient of sliding surface

f Non-load resistance

Vertical Reciprocating Moving Mechanism

For reciprocal operation to move work vertically (up and down) in a conveyance system, the axial load (F_a) can be gotten using the following equations:

$$\text{Acceleration (upward)} \quad Fa_1 = mg + f + ma \quad \dots\dots\dots(11)$$

$$\text{Constant speed (upward)} \quad Fa_2 = mg + f \quad \dots\dots\dots(12)$$

$$\text{Deceleration (upward)} \quad Fa_3 = mg + f - ma \quad \dots\dots\dots(13)$$

$$\text{Acceleration (downward)} \quad Fa_4 = mg - f - ma \quad \dots\dots\dots(14)$$

$$\text{Constant speed (downward)} \quad Fa_5 = mg - f \quad \dots\dots\dots(15)$$

$$\text{Deceleration (downward)} \quad Fa_6 = mg - f + ma \quad \dots\dots\dots(16)$$

Here:

a Acceleration

$$a = \frac{V_{\max}}{t_a} \quad \begin{matrix} V_{\max} \\ t_a \end{matrix} \quad \begin{matrix} \text{Rapid feed speed} \\ \text{time} \end{matrix}$$

m Total weight(table weight + work piece weight)

f Friction coefficient of sliding surface

f Non-load resistance



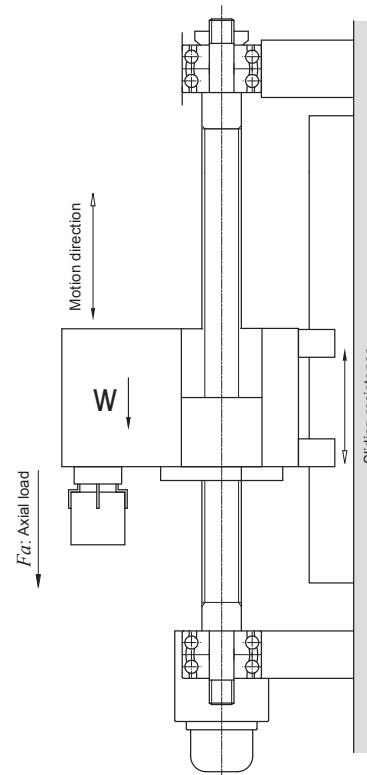


Fig.16 Vertical reciprocating moving mechanism

Notes on Ball Nut Design

Abnormal load: (torsional load or radial load)

When Ballscrew takes only axial load, the best performance of it shall be found; the balls on the groove in between the Ballnut and screw shaft shall evenly take the load and rotate smoothly. In case there is torsional load or radial load on Ballnut, this kind load shall be taken unevenly by some balls only. It shall badly affect Ballscrew performance and even shorten ballscrew life. It is recommended to pay more attention to the mechanism design and Ballscrew assembly.

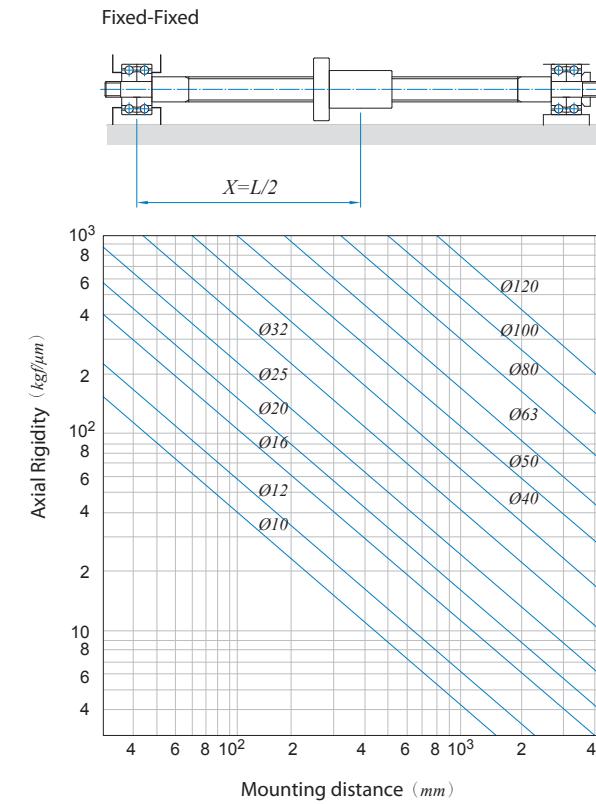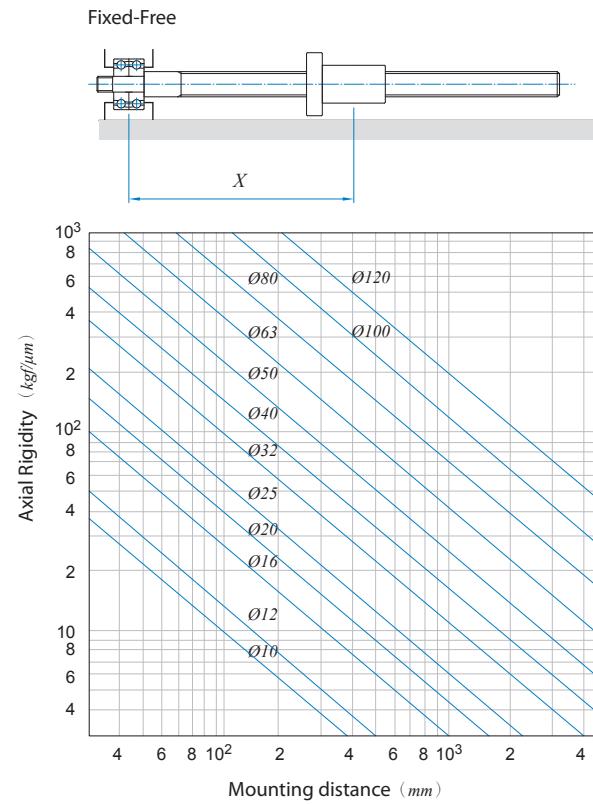

Axial rigidity of Nut: K_N

Computation of the elastic displacement can be using equation (21):

$$\delta_a = \frac{C}{\sin \alpha} \left(\frac{Q^2}{D_w} \right)^{1/3} \times \zeta \quad (\mu m) \quad \dots \dots \dots \quad (21)$$

Here:

- C A constant (reference $C \doteq 2.4$)
 - α Contact angle of ball and grooved
 - D_o Ball diameter (mm)
 - Q Load of each balls ($Q = Fa/Z \cdot \sin \alpha \text{ kgf}$)
 - Z Number of balls
 - ξ A coefficient of accuracy and inter conformation

- Non-preload type

Dimension tables include theoretical axial rigidity values when the axial load with a magnitude of 30% of the basic dynamic load rating (C_d) is exerted on the Nut. These values, don't consider the rigidity of the Nut mounting brackets. Therefore, as a general rule, take 80% of the values given in the table.

When the axial load with a magnitude other than 30% of the basic dynamic load rating (C_d) is exerted on the Nut, rigidity value can be calculated using equation (22).

$$K_N = 0.8 \times K \left(\frac{Fa}{0.3 Ca} \right)^{1/3} \quad \dots \dots \dots \quad (22)$$

Here:

- K** Rigidity value given in the dimension table ($kgf/\mu m$)
 - Fa** Axial load (kgf)
 - Ca** Basic dynamic load rating (kgf)

- Preloaded type

Dimension tables include theoretical axial rigidity values when the axial load with a magnitude of 10% of the basic dynamic load rating (C_d) is exerted on the Nut. These values, don't consider the rigidity of the Nut mounting brackets. Therefore, as a general rule, take 80% of the values given in the table.

When the axial load with a magnitude other than 10% of the basic dynamic load rating (C_d) is exerted on the Nut, rigidity value can be calculated using equation (23).

$$K_N = 0.8 \times K \left(\frac{Fao}{\epsilon \times Ca} \right)^{1/3} \quad \dots \dots \dots \quad (23)$$

Here:

- K** Rigidity value given in the dimension table ($kgf/\mu m$)
 - Fao** Preload (kgf)
 - ε** A coefficient of rigidity
 $\varepsilon=0.10$ (spacer preload and offset preload)
 $\varepsilon=0.05$ (oversize preload)
 - Ca** Basic dynamic load rating (kgf)

Axial rigidity of support bearing: K_A

The axial rigidity of the support bearings for the Ballscrew varies by bearing type.

A typical calculation for determining the axial rigidity of an angular ball bearing can be made using equation (24).

$$K_B = \frac{3Fao}{\delta_{ao}} \quad \dots \dots \dots \quad (24)$$

Here:

- δ_{ao} Displacement in the axial direction.

$$\bar{\delta}_{ao} = \frac{0.44}{\sin \alpha} \left(\frac{Q^2}{D_w} \right)^{1/3} \quad \left. \begin{array}{l} \\ Q = \frac{Fao}{Z \times \sin \alpha} \end{array} \right\} \dots \dots \dots \quad (25)$$

F_{ao} Preload of the suport bearing (kg)

- α Initial contact angle of the support bearing (°)
 - D_w Ball diameter of the support bearing (mm)
 - Q Load of each balls
 - Z Number of balls

Axial rigidity of nut bracket and support bearing bracket: K_H

Take this into consideration in the design of your system. Setting the rigidity as high as possible.

Torsional rigidity of the feed-screw system

The factors of positions error caused by twisting are:

- Torsional deformation of screw shaft.
- Torsional deformation of coupling.
- Torsional deformation of motor.

But above deformations are too small in general machine (non-high speed machine), they are then ignored.

Ballscrew's preload and effect

In order to get high positioning accuracy, there are two ways to reach it. One is commonly known as to clear axial play to zero. The other one is to increase Ballscrew rigidity to reduce elastic deformation while taking axial load. Both two ways are done by preloading.

Methods of preloading

- Double-nut method:

A spacer inserted between two nuts exerts a preload. There are two ways for it.

One is illustrated in Fig.19 That is to use a spacer with thickness complies with required magnitude of preload. The spacer makes the gap between Nut A and B to be bigger, hence to produce a tension force on Nut A and B. It is called "extensive preload".

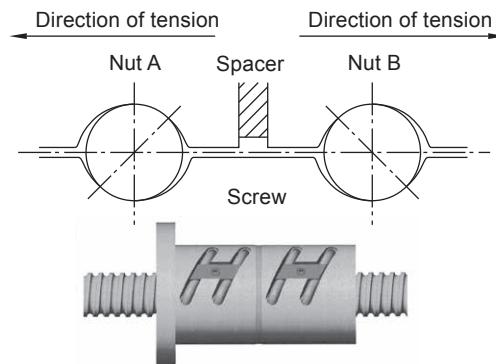


Fig.19 Extensive preload

Illustrated in Fig.20, is using a thinner spacer. The thickness complies with required magnitude of preload. The spacer is smaller than the gap between Nut A and B, compressing Nut A and B on opposite direction to preload Ballscrews. It's called "compressive preload".

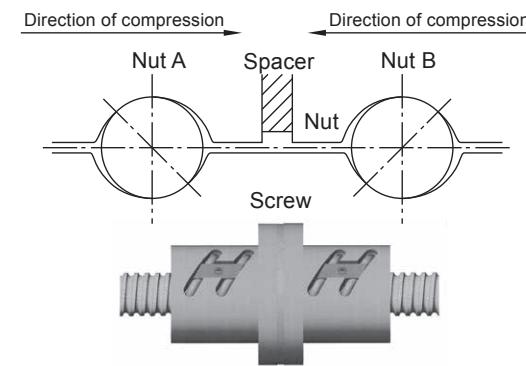


Fig.20 Compressive preload

- Single-nut method:

As that illustrated on Fig.21, using oversize balls onto the space between Ballnut and screw to get required preload. The balls shall make four-point contact with grooves of Ballnut and screw.

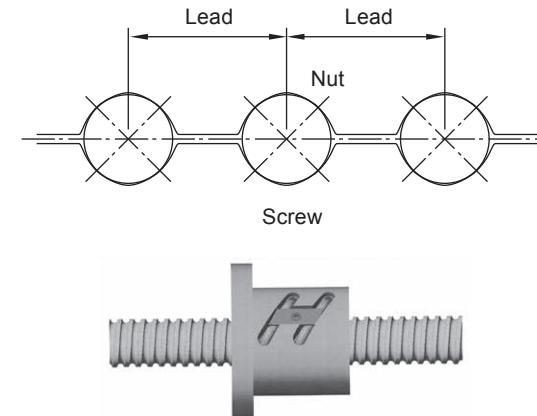


Fig.21 Four-point contact preload

There is another way for single nut Ballscrew preloading. That is to shift a very little distance, which complies with required magnitude of preload, on one lead of Ballnut as that illustrated on Fig.22 to preload Ballscrew.

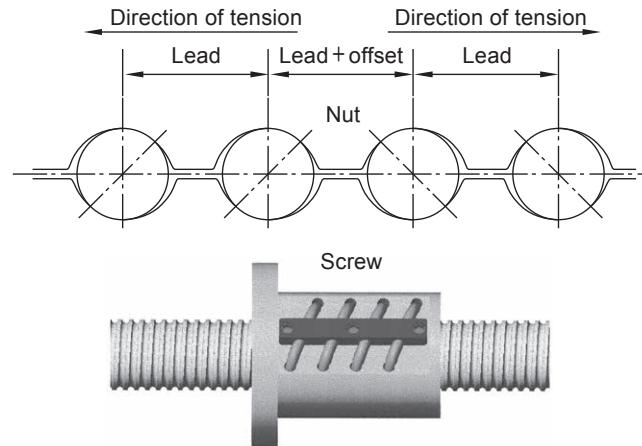


Fig.22 Lead offset preload

Relation between preload force and elastic deformation

Fig.23, Nuts A and B are assembled with preloading spacer. The preload forces on Nut A and B are F_{ao} , but with reversed direction. The elastic deformation on both Nuts are δ_{ao} .

Then there is a external axial force F_a applied to Nut A as shown on Fig.24. The deformation of Nut A and B becomes:

$$\begin{aligned}\delta_A &= \delta_{ao} + \delta_{al} \\ \delta_B &= \delta_{ao} - \delta_{al}\end{aligned}$$

The load in nut A and nut B are:

$$\begin{aligned}F_A &= F_{ao} + F_a - F_{a'} = F_a + F_p \\ F_B &= F_{ao} - F_{a'} = F_p\end{aligned}$$

Note: F_A and F_B are opposite direction.

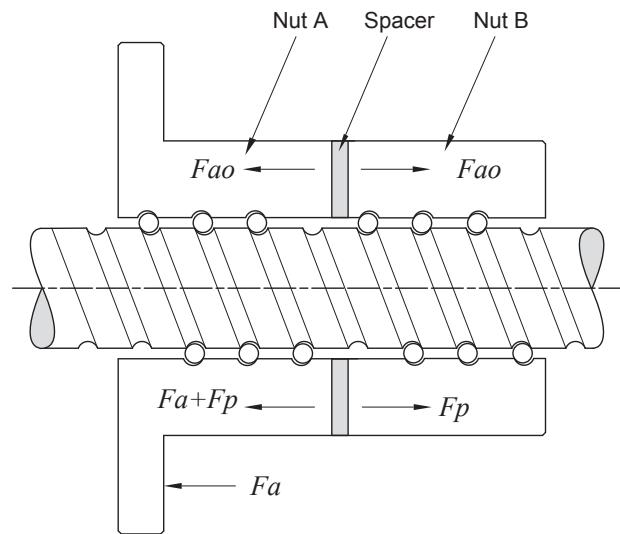


Fig.23 Double-nut positioning preload

It means F_a is offset with an amount F_a' because of the deformation of Nut B decreases. As a result, the elastic deformation of Nut A is reduced. This effect shall be continued until the deformation of Nut B becomes zero, that is, until the elastic deformation δ_{a1} caused by the external axial force equals δ_{a0} , and the preload force applied to Nut B is completely released.

The formula related the external axial force and elastic deformation is shown as below:

$$\delta_{a0} = K \times F_{ao}^{2/3} \text{ and } 2\delta_{a0} = K \times F_l^{2/3}$$

$$(F_l / F_{ao}) = (2\delta_{a0} / \delta_{a0}) = 2$$

$$F_l = 2.8F_{ao} \approx 3F_{ao}$$

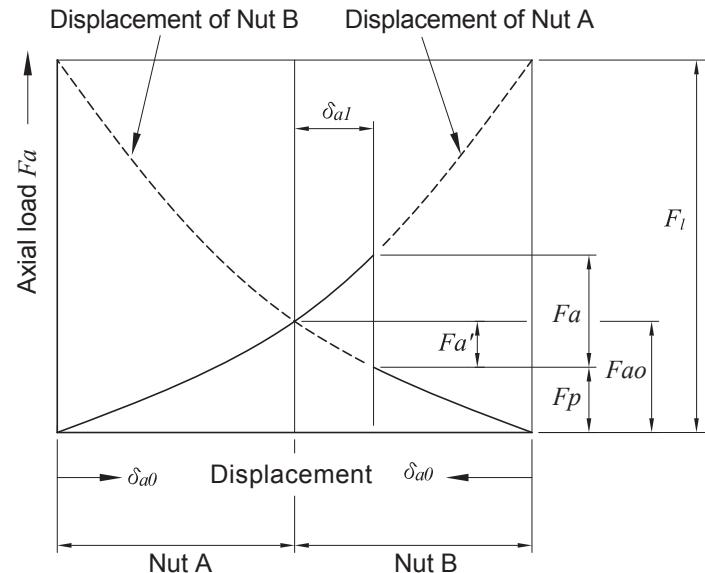


Fig.24 Positioning preload diagram

Therefore, the preload amount of a ballscrew is recommended to set as 1/3 of its axial load. Too much preload for a Ballscrew shall cause temperature raise and badly affect its life. However, taking the life and efficiency into consideration, the maximum preload amount of a Ballscrew is commonly set to be 10% of its rated basic dynamic load.

Shown on Fig.25, with the axial load to be three times as the preload, the elastic displacement for the non-preloaded ball nut is two times as that of the preloaded nut.

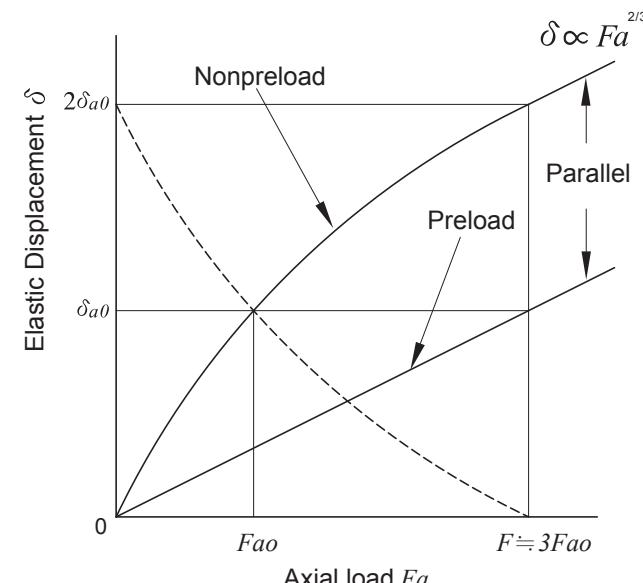


Fig.25 Elastic Displacement of the Ballscrew

Positioning Accuracy

Causes of Error in Positioning Accuracy

Lead error and rigidity of feed system are common causes of feed accuracy error. Other causes like thermal deformation and feed system assembly are also playing important roles in feed accuracy.

Selecting the Lead Accuracy

Refer to **page[A1-4]**, the Specified travel line should coincide with the nominal travel line. However, in order to compensate either the elongation caused by the thermal expansion during machine operating or the shortening of length due to external load, the specified travel may be set to be positive or negative to the Nominal travel. Machine designer can show the value of Specified travel on the drawing for our manufacturing, or, we can help to decide it based on our more than ten years experience.

There is another way to compensate thermal effect by "pretension" to Ballscrew. Generally, the pretension force shall elongate the Ballscrew to be equivalent to the thermal expansion at about 2-3°C.

Considering Thermal Displacement

If the screw-shaft temperature increases during operation, the heat elongates the screw shaft, thereby reducing the positioning accuracy. Expansion and shrinkage of a screw shaft due to heat can be calculated using equation (26).

Here:

ΔL_θ Thermal displacement (μm)

β Thermal-expansion coefficient ($12 \mu\text{m}/\text{m}^\circ\text{C}$)

θ Screw-shaft temperature change ($^{\circ}\text{C}$)

L Ballscrew length (mm)

That is to say, an increase in the screw shaft temperature of 1°C expands the shaft by $12 \mu\text{m}$ per meter. The higher the Ballscrew speed, the greater the heat generation. Thus, temperature increases reduce positioning accuracy. Where high accuracy is required, anti-temperature-elevation measures must be provided as follows:

To control temperature:

- Selecting appropriate preload.
 - Selecting correct and appropriate lubricant.
 - Selecting larger lead for the Ballscrew and decrease the rotation speed.

Compulsory cooling:

- Ballscrew with hollow cooling.
 - Lubrication liquid or cooling air can be used to cool down external surface of Ballscrew.
 - Nut cooling system: to reduce temperature of nut by cooling liquid through it.

To keep off effect upon temperature raise:

- Set a negative cumulative lead target value for the Ballscrew.
 - Warm up the machine to stable machine's operating temperature.
 - Pretension by using on Ballscrew while installing onto the machine.
 - Use the Closed-loop positioning control.

Life of the Ballscrew

Even though the Ballscrew has been used with correct manner, it shall naturally be worn out and can no longer be used for a specified period. Its life is defined by the period from starting use to ending use caused by nature fail.

- a. Fatigue life - Time period for surface flaking off happened either on balls or on thread grooves.
- b. Accuracy life - Time period for serious loosing of accuracy caused by wearing happened on thread groove surface, hence to make Ballscrew can no longer be used.

Fatigue Life

The basic dynamic rate load (C_d) of the Ballscrew is used to calculate its fatigue life when it is operated under a load.

Basic dynamic rate load C_d

The basic dynamic rate load (C_a) is the revolution of 10^6 that 90% of identical Ballscrew units in a group, when operated independently of one another under the same conditions, can achieve without developing flaking.

Fatigue life

Calculating life

There are three ways to show fatigue life:

- Total number of revolutions
 - Total operating time.
 - Total travel.

$$L = \left(\frac{Ca}{Fa \times f_w} \right)^3 \times 10^6 \quad \dots \dots \dots \quad (27)$$

$$L_t = \frac{L}{60 \times n} \quad \dots \dots \dots \quad (28)$$

$$L_s = \frac{L \times l}{10^6} \quad \dots \dots \dots \quad (29)$$

here:

- L* Fatigue life (total number of revolutions)(*rev*)
 - L_t* Fatigue life (total operating time)(*hr*)
 - L_s* Fatigue life (total travel)(*km*)
 - C_a* Basic dynamic rate load(*kgf*)
 - F_a* Axial load(*kgf*)
 - n* Rotation speed(*rpm*)
 - l* Lead(*mm*)
 - f_w* Load factor (refer to Table 14)

Table 14 Load factor f_w

Vibration and impact	Velocity (V)	f_w
Light	$V < 15 \text{ (m/min)}$	1.0~1.2
Medium	$15 < V < 60 \text{ (m/min)}$	1.2~1.5
Heavy	$V > 60 \text{ (m/min)}$	1.5~3.0

Too long or too short fatigue life are not suitable for Ballscrew selection. Using longer life make the Ballscrew's dimensions too large. It's an uneconomical result. Following table is a reference of the Ballscrew's fatigue life.

Machine center 20,000 hours

Production machine 10,000 hours

Automatic controller 15,000 hours

Surveying instruments 15,000 hours

Mean load

When axial load changed constantly. It is required to calculate the mean axial load (F_m) and the mean rotational speed (N_m) for fatigue life. Setting axial load (F_a) as Y-axis; rotational number ($n \cdot t$) as X-axis. Getting three kind curves or lines:

- Gradational variation curve (Fig.26[A1-53])

Mean load can be calculated by using equation (30):

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{1}{3}} \quad \dots \dots \dots (30)$$

Mean rotational speed can be calculated by using equation (31):

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t_1 + t_2 + \dots + t_n} \quad \dots \dots \dots (31)$$

Axial load (kgf)	Rotation speed (rpm)	Time Ratio (Sec or %)
F_1	n_1	t_1
F_2	n_2	t_2
.	.	.
F_n	n_n	t_n

- Similar straight line (Fig.27)

When mean load variation curve like similar straight line. Mean rotational speed can be calculated using equation (32).

$$F_m = 1/3(F_{min} + 2F_{max}) \quad \dots \dots \dots (32)$$

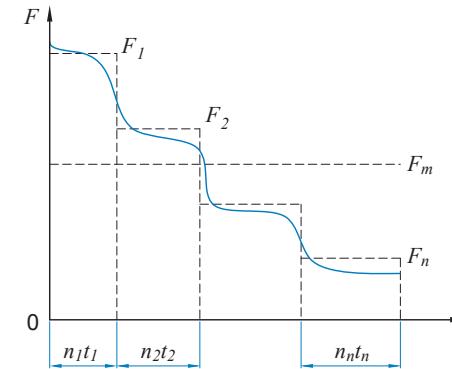


Fig.26 Gradational variation curve's load

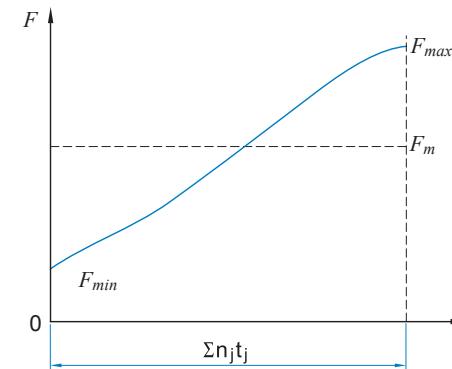


Fig.27 Similar straight line's load

- Sine curve there are two cases

1. When mean load variation curve shown as the Fig.28 below. Mean rotational speed can be calculated by using equation (33):

2. When mean load variation curve shown as the Fig.29 below. Mean rotational speed can be calculated by using equation (34):

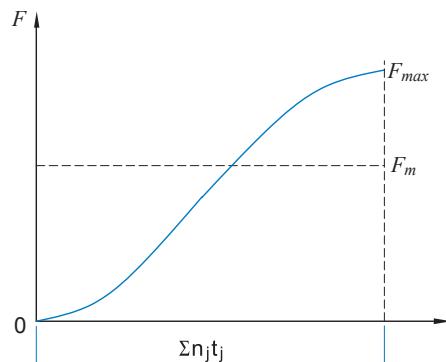


Fig.28 Variation like Sine curve's load (1)

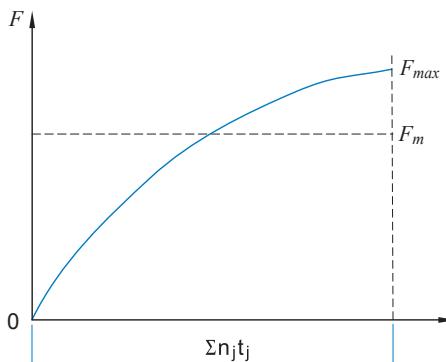


Fig.29 Variation like Sine curve's load (?)

Affection of installation errors

When twist load or radial load is applied to Ballscrew, there shall be bad effect on ballscrew operation and its life, It is required to make the feed system (Ballscrew, support bearings, Guideways) to be more rigid. Hence to reduce. installation errors.

Ballscrews must be meticulously installed onto the Yoke (bracket) of machine to achieve precise parallelism and squareness along moving direction of moving parts. It is very important to ensure minimum backlash happens.

Scales of reference calculate for support torque of ball screw, allow Fig.30

Nut type : R40-10B2-FSWC

specification

shaft diameter : 40 mm

ball diameter : 6.35 mm

effective turns : 2.5 circuit x 2 row

Axial play : 50 μ m

conditions

Axial force $F_a = 300 \text{ kgf}$

Radial displacement:0

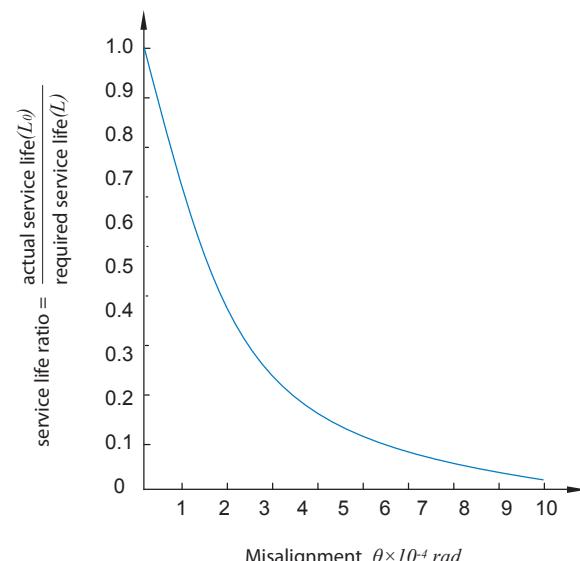


Fig.30 The effect on service life of a radial load caused by misalignment

Permissible Load on Thread Grooves

Even though the Ballscrew is seldom operated and is operated under low velocity, it is required to make the maximum load to be far smaller than its rated basic static load when making selection.

Basic static rate load C_o

The basic static rate load is the static load with a non-varying direction and magnitude that makes the sum of the permanent deformation of the rolling elements and raceway 0.0001 times the rolling element diameter. With the Ballscrew, the basic static rate load is defined in relation to the axial load.

Permissible axial load

$$F_{max} = C_o / f_s$$

Here:

f_s Static safety factor

General industrial machine.....1.2~2

Machine tool.....1.5~3

Material and Hardness

Material and Hardness of PMI Ballscrews

Table 15 Material and hardness of Ballscrews

Denomination	Material	Heat treating	Hardness (HRC)
Precision ground	50CrMo4 QT/Equivalent	Induction hardening	58~62
Rolled	S55C/Equivalent	Induction hardening	58~62
Nut	SCM420H/Equivalent	Carburized hardening	58~62

Hardness factor

If used *PMI*'s standard materials else one, for a surface hardness of less than HRC58, the basic dynamic rate load (C_a) and the basic static rate load (C_o) must be adjusted. Adjustment is made by the following formula. Show in Fig.31

$$C_a' = f_H \times C_a$$

$$C_o' = f_{H'} \times C_o$$

Here:

f_H Hardness coefficient

$f_{H'}$ Static Hardness coefficient

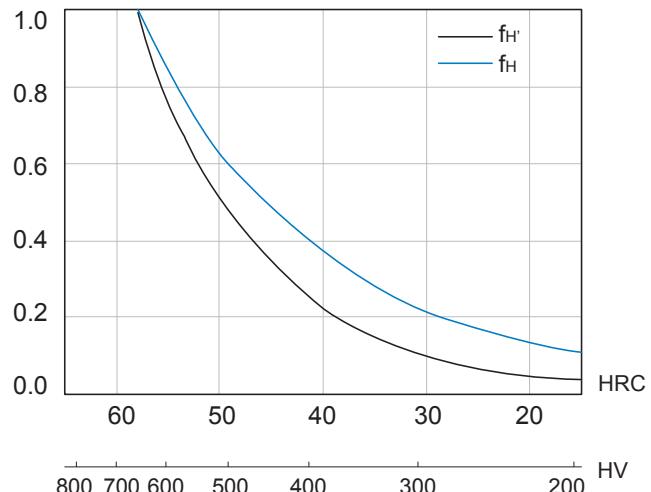


Fig.31 Hardness coefficient

Heat Treating Inspection Certificate



SPECIMEN#	P90227																																																																												
CUSTOMER		P.O.NUMBER	SPECIFICATION																																																																										
PRODUCT	BALLSCREW	03-016030-1	R38-I5B2-FSVC-557-685.8-C4																																																																										
MATERIAL	50CrMo4QT																																																																												
HEATTREAT	INDUCTION SURFACE HARDENING																																																																												
ITEM	INSPECTION DATA	HEATTREATEDARE (SEESKETCH) <small>HARDNESS INSPECTED EVERY 0.5mm (SERIES 2)</small> <small>HARDNESS INSPECTED EVERY 0.5mm (SERIES 1)</small>																																																																											
HARDNESS	58 - 62 HRC AT SURFACE																																																																												
CASEDEPTH	1.5 mm BELOW THREAD ROOT																																																																												
MICRO-STRUCTURE	Martensite IN SURFACE AREA																																																																												
TEMPERING	Sorbite IN CORE AREA																																																																												
DEPTH	Series1	Series2	MICROSTRUCTURE X500																																																																										
0	725	718																																																																											
1	705	698																																																																											
2	704	705																																																																											
3	698	681																																																																											
4	694	642																																																																											
5	679	562																																																																											
6	625	277																																																																											
7	547	277																																																																											
8	390																																																																												
9	286																																																																												
10	288																																																																												
11																																																																													
12																																																																													
13																																																																													
14																																																																													
15																																																																													
<p>Series 1 Series 2</p> <p>800 700 600 500 400 300 200 100 0</p> <p>800 700 600 500 400 300 200 100 0</p> <p>0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15</p> <p>DEPTH(EACHSCALE=0.5mm)</p>			HV VS. HRC <table border="1"> <thead> <tr> <th>HV</th> <th>HRC</th> </tr> </thead> <tbody> <tr><td>800</td><td>64.0</td></tr> <tr><td>780</td><td>63.3</td></tr> <tr><td>760</td><td>62.5</td></tr> <tr><td>740</td><td>61.8</td></tr> <tr><td>720</td><td>61.0</td></tr> <tr><td>700</td><td>60.1</td></tr> <tr><td>690</td><td>59.7</td></tr> <tr><td>680</td><td>59.2</td></tr> <tr><td>670</td><td>58.8</td></tr> <tr><td>660</td><td>58.3</td></tr> <tr><td>650</td><td>57.8</td></tr> <tr><td>640</td><td>57.3</td></tr> <tr><td>630</td><td>56.8</td></tr> <tr><td>620</td><td>56.3</td></tr> <tr><td>610</td><td>55.7</td></tr> <tr><td>600</td><td>55.2</td></tr> <tr><td>590</td><td>54.7</td></tr> <tr><td>580</td><td>54.1</td></tr> <tr><td>570</td><td>53.6</td></tr> <tr><td>560</td><td>53.0</td></tr> <tr><td>540</td><td>51.7</td></tr> <tr><td>520</td><td>50.5</td></tr> <tr><td>500</td><td>49.1</td></tr> <tr><td>480</td><td>47.7</td></tr> <tr><td>460</td><td>46.1</td></tr> <tr><td>440</td><td>44.5</td></tr> <tr><td>420</td><td>42.7</td></tr> <tr><td>400</td><td>40.8</td></tr> <tr><td>380</td><td>38.8</td></tr> <tr><td>360</td><td>36.6</td></tr> <tr><td>340</td><td>34.4</td></tr> <tr><td>320</td><td>32.2</td></tr> <tr><td>300</td><td>29.8</td></tr> <tr><td>280</td><td>27.1</td></tr> <tr><td>260</td><td>24.0</td></tr> <tr><td>240</td><td>20.3</td></tr> </tbody> </table>	HV	HRC	800	64.0	780	63.3	760	62.5	740	61.8	720	61.0	700	60.1	690	59.7	680	59.2	670	58.8	660	58.3	650	57.8	640	57.3	630	56.8	620	56.3	610	55.7	600	55.2	590	54.7	580	54.1	570	53.6	560	53.0	540	51.7	520	50.5	500	49.1	480	47.7	460	46.1	440	44.5	420	42.7	400	40.8	380	38.8	360	36.6	340	34.4	320	32.2	300	29.8	280	27.1	260	24.0	240	20.3
HV	HRC																																																																												
800	64.0																																																																												
780	63.3																																																																												
760	62.5																																																																												
740	61.8																																																																												
720	61.0																																																																												
700	60.1																																																																												
690	59.7																																																																												
680	59.2																																																																												
670	58.8																																																																												
660	58.3																																																																												
650	57.8																																																																												
640	57.3																																																																												
630	56.8																																																																												
620	56.3																																																																												
610	55.7																																																																												
600	55.2																																																																												
590	54.7																																																																												
580	54.1																																																																												
570	53.6																																																																												
560	53.0																																																																												
540	51.7																																																																												
520	50.5																																																																												
500	49.1																																																																												
480	47.7																																																																												
460	46.1																																																																												
440	44.5																																																																												
420	42.7																																																																												
400	40.8																																																																												
380	38.8																																																																												
360	36.6																																																																												
340	34.4																																																																												
320	32.2																																																																												
300	29.8																																																																												
280	27.1																																																																												
260	24.0																																																																												
240	20.3																																																																												
REMARKS		PASS OR NOT		Q.C.CHIEF		INSPECTOR																																																																							

Lubrication

Lithium base lubricants are used for Ballscrew lubrication.

Their viscosity are 30~140 cst (40°C) and ISO grades of 32~100.

Selecting:

- 1.High speed or Low temperature application: Using the lower viscosity lubricant.
- 2.High temperature, high load and low speed application: Using the higher viscosity lubricant.

Table 16 Checking and supply interval of lubricant

Manner	Checking interval	Checking item	Supply or replacing interval
Automatic interval oil supply	every week	oil volume and purity	To supply on each check, its volume depends on oil tank capacity
Lubricating grease	Within 2-3 months after starting operation of machine	foreign matter	Normally supply once a year as per the result of check
Oil bath	everyday before operation of machine	oil surface	To supply as per wasting condition

Table 17 calculate of supply lubricate oil

Lubrication method	Principles of inspection and add
oil	<p>Checked and add depending on the tank capacity every week. Oil should be changed when oil is dirty.</p> <p>Calculation of oil Capacity: Capacity of supply oil every 10 min. $Q = \frac{\text{Shaft diameter (mm)}}{90} \text{ c.c.} \dots\dots(35)$</p>

Table 18 calculate of supply lubricate grease

Lubrication method	Principles of inspection and add
grease	<p>Checked every 2~3 months after begin of the operation and see whether foreign matter. Change grease when dirty.</p> <p>Add grease depending on the use condition and operation environment.</p> <p>The add capacity should be the 50% of the internal volume of the nut.</p> <p>Avoid using different brands of grease</p>
Ball diameter d	Ø1.588 Ø2.0 Ø2.381 Ø2.778 Ø3.175 Ø3.969 Ø4.762
G value	0.8 1.0 1.0 1.5 1.2 1.3 2.0
Ball diameter d	Ø6.350 Ø7.144 Ø7.938 Ø9.525 Ø12.7 Ø15.875 Ø19.05
G value	3.0 3.5 3.9 5.0 6.0 9.6 12

$$Q = \left[\left(\sqrt{(\pi \times dm)^2 + Ld^2} \times \pi d^2 \times \text{effective turns} \right) \times \frac{l}{1000} + \left(\frac{\pi L \times (2DG + G^2)}{4} \right) \right] \times \frac{l}{1100} \dots\dots(36)$$

Q Capacity of supply lubricate grease(cm³)

D Shaft diameter(mm)

d Ball diameter(mm)

dm Ball circle diameter(mm)


G Size factor of ball

Ld Lead(mm)

L Length of Nut(mm)

Dustproof

Same as the rolling bearings, if there is the particles such as chips or water get into the ballscrew, the wearing problem shall be deteriorated. In some serious cases, ballscrew shall then be damaged. In order to prevent these problems from happening, there are wipers assembly at both ends of ballnut and please use the Screw cover or Bellows for better dustproof. Should there be any more information required, please contact us. There is also the "O-Ring" at the wipers to seal the lubrication oil from leaking from ballnut.

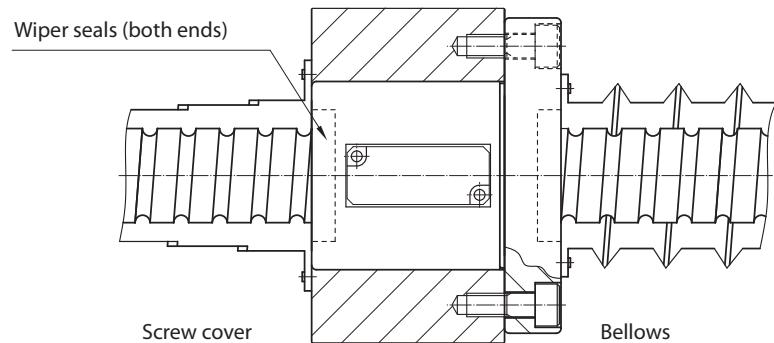

Dustproof by screw cover and bellows

Driving torque at constant acceleration

The torque required to counteract load and to let Ballscrew to rotate at constant acceleration is driving torque at constant acceleration.


Here:

- | | |
|----------------|--|
| T_2 | Driving torque at constant acceleration |
| $\dot{\omega}$ | Motor's angular acceleration |
| J | Total inertial |
| J_M | Inertial of motor |
| J_{G1} | Inertial of gear one |
| J_{G2} | Inertial of gear two |
| J_{SH} | Inertial of screw shaft |
| J_w | Inertial of moving parts (Ballscrew, Table) |
| J_C | Inertial of Coupling |
| m | Total Masses (Working table mass + working piece mass) |
| l | Lead |

- Cylindric inertia (Ballscrew, gear)


Here:

- ρ Material Density
 - γ Specific Gravity
 - D Diameter of Cylinder
 - L Length of Cylinder
 - m Mass of Cylinder

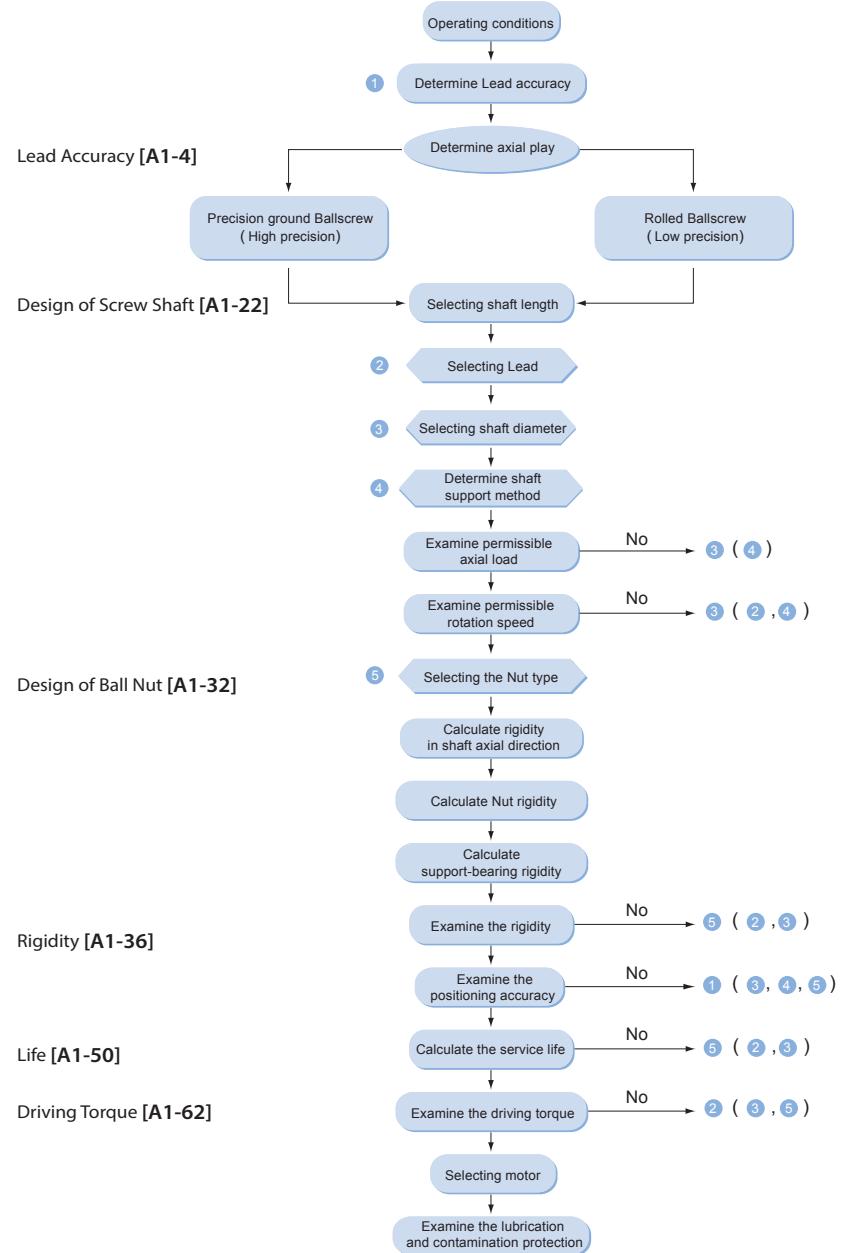

Nomenclature of PMI Ballscrew

Nomenclature of External Circulation Ballscrew

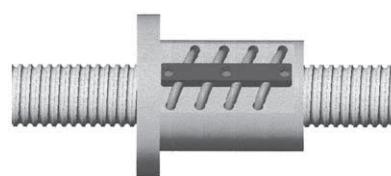TYPE
FDWCTYPE
DFWCTYPE
FSWCTYPE
FOWCTYPE
RSWCTYPE
SSWC

Nomenclature of Internal Circulation Ballscrew

1R50-10T 4-2FS I C -1000 -1500 -0.018 R

- A: Precision Ground Ballscrew + High dustproof wiper
A2 (Rubber Seal)
A3 (Film Seal)
- B: Rolled Ballscrew + High dustproof wiper
B2 (Rubber Seal)
B3 (Film Seal)
- R: Rolled (Not marked for precision ground Ballscrews)
- S: Spacer
- Q: Self Rubricator
- H: Hollow Cooling Screw Shaft
- M: Stainless Steel
- Accuracy grade
- Overall length
- Thread length
- Refer to [A1-69] for this special code
- I: Internal ball circulation
- D: End Deflector
- S: Single nut
- D: Double nut
- O: Lead offset preloaded Ballnut
- F: Ballnut with face to face flanges
- F: Flange type
- R: None flange type
- S: Square Ballnut
- D: Double flange Ballnut
- Number of pairs of Nut on one screw shaft
- Quantity of circulation deflectors (or inserts)
- T: Number of circuit = 1 circuit
- Lead
- Screw nominal O.D.
- Thread direction
- Number of Thread

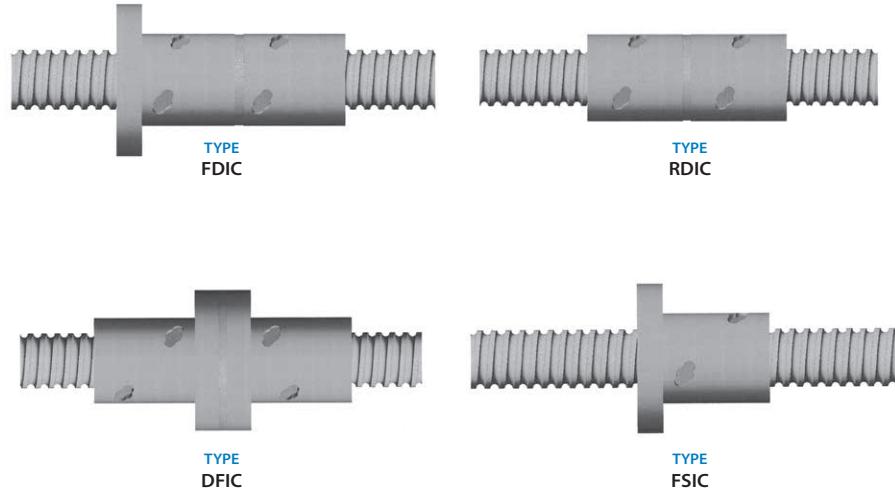


Table19 Special Code for Nut

C	Ground Grade
W	Rolled Grade
E	High Lead Ballscrews
H	Heavy Load Ballscrews
N	Rolled Grade (DIN 69051 Nut Dimension)
U	Rolled Grade + Seal (DIN 69051 Nut Dimension)
M	Automation Industry Specialized Type
A	Deflector Type Cooling Nut- Recirculation Type
B	Deflector Type Cooling Nut- Direct Passing Type
K	High Lead Type Cooling Nut- Recirculation Type
T	Rotation Nut Type
S	High Lead Low Noise Type

Sample Process of Selecting The Type of Ballscrew

Cutting Machine

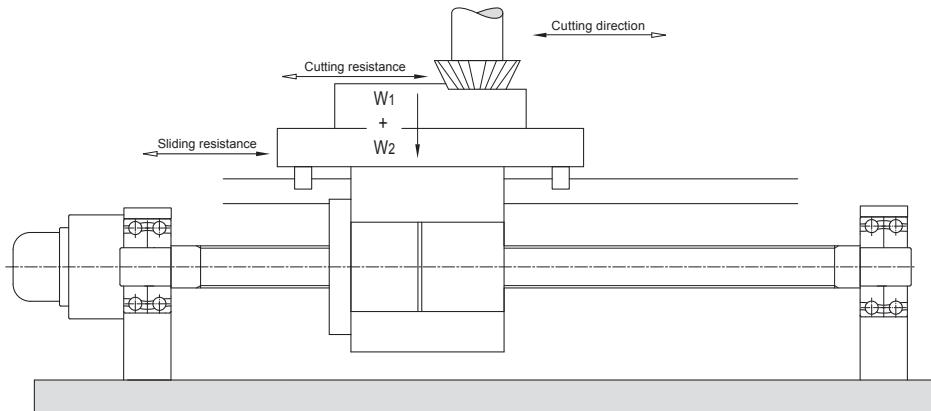


Fig.33 Cutting machine

Design Conditions

Table weight:	$W_t = 1100 \text{ kg}$
Work piece weight:	$W_2 = 800 \text{ kg}$
Max. travel:	$S_{max} = 1000 \text{ mm}$
Rapid feed speed:	$V_{max} = 14 \text{ m/min}$
Life:	$L_t = 25000 \text{ h}$
Sliding surface friction coefficient:	$\mu = 0.1$
Driving motor:	$N_{max} = 2000 \text{ rpm}$
Positioning accuracy:	$\pm 0.030/1000 \text{ mm}$ (no load)
Repeatability accuracy:	$\pm 0.005 \text{ mm}$ (no load)
Lost Motion:	0.02 mm (no load)

Mechanical Conditions

Kinds of Operation	Calculation data		Feed speed <i>mm/min</i>	Time ratio(%)
	Axial load (<i>kgf</i>)			
	Cutting resistance	Sliding resistance		
Rapid feed	0	190	14000	30
Light cutting	500	190	600	55
Heavy cutting	950	190	120	15

$$\begin{aligned} \text{Sliding resistance: } F_a &= \mu (W_t + W_2) \\ &= 0.1 \times (1100 + 800) \\ &= 190 \text{ (kgf)} \end{aligned}$$

Items to Be Decided

- Screw nominal O.D., Lead, Type of Nut
- Accuracy grade
- Thermal displacement
- Driving motor

Selecting Screw nominal O.D., Lead, Nut

- Lead(l):

The highest rotation speed of motor

$$l \geq \frac{V_{max}}{N_{max}} = \frac{14000}{2000} = 7 \text{ (mm)}$$

◎Lead have to be 7mm or more.

(As per PMI catalog: select 8 and 10 mm for further analysis)

- Basic dynamic rate load (Ca)

Kinds of Operation	Calculation data	Axial load		Feed speed		Time ratio(%)
		-	$l=8$	$l=10$	$t_l=30$	
Rapid feed	$F_l = 190$	$N_l = 1750$	$N_l = 1400$			
Light cutting	$F_2 = 690$	$N_2 = 75$	$N_2 = 60$			
Heavy cutting	$F_3 = 1140$	$N_3 = 15$	$N_3 = 12$			

Calculation of mean load and mean rotation

$$\text{Mean load } F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{l}{3}}$$

$$\text{Mean rotation } N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t_1 + t_2 + \dots + t_n}$$

Lead l (mm)	8	10
Mean load F_m (kgf)	330	330
Mean rotation N_m (rpm)	569	455

Calculation of basic dynamic rate load

$$L = \left(\frac{Ca}{Fa \times f_w} \right)^3 \times 10^6 \quad L_t = \frac{L}{60N_m}$$

$$\Rightarrow Ca = (60N_m \times L_t)^{1/3} \times F_m \times f_w \times 10^{-2}$$

As per design Conditions:

$$L_t = 25000 \text{ (hours)}$$

$$f_w = 1.2$$

When $l=8\text{(mm)}$ $Ca \geq 3756 \text{ (kgf)}$

If life > 25000 (hours) is needed,

Ca must be > 3756 (kgf)

When $l=10\text{(mm)}$ $Ca \geq 3487 \text{ (kgf)}$

If life > 25000 (hours) is needed,

Ca must be > 3487 (kgf)

- Selecting the type of nut

In case stiffness is a major concern, lost motion becomes less important, following specifications are to be selected:

1.External circulation Ballscrew

2.Type: FDWC

3.Number of circuit: Bx2 or Bx3

The value of Ca can be found as per this catalog:

Unit: (kgf)

Screw nominal O.D.(mm)	lead 8 (mm)		lead 10 (mm)	
	Bx2	Bx3	Bx2	Bx3
32	3210	-	4660	-
36	3265	-	4930	-
40	3410	-	5220	-
45	3650	5175	5480	7760
50	3900	5520	5790	8200

- Selecting screw shaft diameter

Ballscrew shaft diameter can be decided by critical rotation speed of high speed feed.

Assume both of the supporting ends are fixed.

So the permissible rotational speed :

$$n = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{Eig}{rA}} = f \frac{dr}{L^2} \times 10^7$$

$$\Rightarrow dr \geq \frac{n \times L^2}{f} \times 10^7$$

L = Max. stroke + Nut length/2 + Unthread area length

$$= 1000 + 100 + 200 = 1300 \text{ (mm)}$$

Screw shaft supported method is fixed-fixed

$$\Rightarrow f = 21.9$$

when $l = 8 \text{ (mm)}$ $dr \geq 13.5 \text{ (mm)}$

If the highest rotational speed reaches 1750 rpm,

screw shaft diameter at thread root area must be bigger than 14 mm.

◎ So screw shaft diameter shall be ranged in between 20 and 50 mm.

When $l = 10 \text{ (mm)}$ $dr \geq 10.8 \text{ (mm)}$

If the highest rotational speed reaches 1400 rpm,

screw shaft diameter at thread root area must be bigger than 11 mm.

◎ So screw shaft diameter shall be ranged in between 16 and 50 mm.

- Considering rigidity

By initial conditions:

Lost motion : 0.02 mm (no load)

Assume total displacement of components (including screw shaft, ballnut and support bearing)

of feed system is 0.016 mm. Thus the unilateral elastic displacement of feed system is $\Delta L \leq 8 \mu\text{m}$


Axial rigidity of the screw shaft: K_S

Elastic displacement of the screw shaft: ΔL_S

$$K_S = \frac{A \times E \times L}{x(L-x)} \times 10^{-3}$$

The smallest elastic displacement is in the middle of screw shaft.

From following diagram Using $x = L/2$

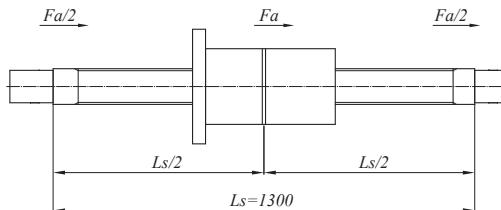

$$\Rightarrow K_S = \frac{\pi \times dr^2 \times E}{L_s} \times 10^3$$

$$\Delta L_S = \frac{F_a}{K_S} = \frac{F_a \times L_s}{\pi \times dr^2 \times E} \times 10^3$$

Here F_a is sliding resistance of 190 kgf

The results are in the [A1-76] Table

Axial rigidity of the nut: K_n

Elastic displacement of the nut: ΔL_n

Setting the preload to be 1/3 of maximum axial load.

$$Fao = F_{max} / 3 = 1140 / 3 = 380 \text{ (kgf)}$$

$$K_n = 0.8 \times K \left(\frac{Fao}{\varepsilon \times Ca} \right)^{1/3}$$

$$\varepsilon = 0.1, \text{ then}$$

$$\Delta L_n = \frac{F_a}{K_n}$$

The results are in the [A1-76] Table

Nut model no.	dr	Ca	K	Screw		Nut		ΔL
				K_s	ΔL_s	K_n	ΔL_n	
32-10B2-FDWC	27.05	4660	125	37.1	5.1	93.0	2.0	7.1
36-10B2-FDWC	31.05	4930	138	48.9	3.9	101.2	1.9	5.8
40-10B2-FDWC	35.05	5220	151	62.3	3.0	108.7	1.7	4.7
45-10B2-FDWC	38.05	5480	167	73.5	2.6	118.3	1.6	4.2
50-10B2-FDWC	42.05	5790	182	89.7	2.1	126.5	1.5	3.6

◎With the condition of $\Delta L \leq 8 (\mu m)$

Make following selection by ignoring the bearing rigidity, economical and safety consideration:

Type of Ballscrew: 40-10B2-FDWC

Screw shaft diameter: 40 (mm)

Lead: 10 (mm)

• Length of Ballscrew

$$L = \text{Max. travel} + \text{Nut length} + \text{Unthreaded area length} \\ (\text{including journal ends length})$$

$$= 1000 + 180 + 100$$

$$= 1280$$

$$\approx 1300 (\text{mm})$$

• Preliminary check

a. Fatigue life

$$L_t = \left(\frac{Ca}{F_m \times f_w} \right)^3 \times 10^6 \times \frac{1}{60n}$$

$$= \left(\frac{5220}{330 \times 1.2} \right)^3 \times 10^6 \times \frac{1}{60 \times 455}$$

$$\approx 83900 (\text{hours}) \geq 25000 (\text{hours})$$

b. Permissible rotational speed

$$n = f \times \frac{dr}{L^2} \times 10^7 \\ = 4540 (\text{rpm})$$

Critical speed of screw shaft is 4540(rpm). It is much bigger than the maximum rotational speed of design. So the Ballscrew selected is safe.

Selecting lead accuracy

Positioning accuracy required: $\pm 0.030/1000 \text{ mm}$ (Max. travel) Refer to Table 2[A1-6], accumulated reference lead deviation ($\pm E$) and total relative variation (e)

Accuracy grades: C4

$$E = \pm 0.025/1250 (\text{mm})$$

$$e = 0.018 (\text{mm})$$

Considering thermal displacement

According to the load capability of support bearings, make the specified travel (T) compensation to be 3°C

- Thermal displacement: ΔL_θ

$$\Delta L_\theta = \rho \cdot \theta \cdot L \\ = 12.0 \times 10^{-6} \times 3 \times 1300 \\ = 0.047 (\text{mm})$$

- Pretension force: F_θ

$$F_\theta = \Delta L_\theta \times K_S = \frac{\Delta L_\theta \cdot E \cdot \pi dr^2}{4L} \\ = \frac{0.047 \times 2.1 \times 10^4 \times \pi \times 27.05^2}{4 \times 1300} \\ = 436 (\text{kgt})$$

Specified Travel (T): -0.047/1300

Pretension force: 436 (kgt)

Stretching: -0.047 (mm)

Selecting driving motor

<Required specifications>

The highest rotation speeds is 1500 (rpm)

Time required to reach highest rotational speed is within 0.15 sec.

- Inertial

a. Screw shaft:

$$GD_s^2 = \frac{\pi\rho}{8} \times D^4 \times L = \frac{\pi \times 7.8 \times 10^{-3}}{8} \times 4^4 \times 130 = 101.9 \text{ (kgf}\cdot\text{cm}^2)$$

b. Moving parts:

$$GD_w^2 = W \left(\frac{l}{\pi} \right)^2 = (1100+800) \times \left(\frac{1.0}{\pi} \right)^2 = 192.5 \text{ (kgf}\cdot\text{cm}^2)$$

c. Coupling:

$$GD_f^2 = 40 \text{ (kgf}\cdot\text{cm}^2)$$

d. Total of inertial:

$$GD_L^2 = GD_s^2 + GD_w^2 + GD_f^2 = 334.4 \text{ (kgf}\cdot\text{cm}^2)$$

- Driving torque

In this case, the time sharing of machine working at acceleration condition is limited. Assuming the machine works at constant speed, the torque caused by angular acceleration is then neglected.

a. Preloading torque:

$$T_p = k \times \frac{Fao \times l}{2\pi} = 0.18 \times \frac{380 \times 1.0}{2\pi} = 10.8 \text{ (kgf}\cdot\text{cm)}$$

$$k = 0.18$$

$$Fao = F_{max}/3$$

b. Friction torque

Rapid feed:

$$T_a = \frac{F_a \times l}{2\pi \times \eta} = \frac{190 \times 1.0}{2\pi \times 0.9} = 33.6 \text{ (kgf}\cdot\text{cm)}$$

Light cutting:

$$T_b = \frac{690 \times 1.0}{2\pi \times 0.9} = 122.1 \text{ (kgf}\cdot\text{cm)}$$

Heavy cutting:

$$T_c = \frac{1140 \times 1.0}{2\pi \times 0.9} = 201.7 \text{ (kgf}\cdot\text{cm)}$$

The maximum required driving torque is preloading torque plus friction torque of heavy cutting.

$$\begin{aligned} T_L &= T_p + T_c \\ &= 212.5 \text{ (kgf}\cdot\text{cm)} \end{aligned}$$

- Selecting driving motor

<Selecting conditions>

a. The highest rotation speed: $N_{max} \geq 1500 \text{ (rpm)}$

b. Rated torque: $T_M > T_L$

c. Rotor inertia: $J_M \geq J_L / 3$

The specifications required for driving motor are then decided as per above conditions.

◎Motor specifications:

Output	$W_M = 3.6 \text{ (kW)}$
Highest rotation speeds	$N_{max} = 1500 \text{ (rpm)}$
Rated torque	$T_M = 22.6 \text{ (N.m)}$
Rotor inertia	$GD_M^2 = 750 \text{ (kgf}\cdot\text{cm}^2)$

- Check required time period for reaching highest rotation speed

$$t_a = \frac{J}{T'_M - T_L} \times \frac{2\pi N}{60} \times f$$

Here

$$J : \text{Total inertia} \quad J = \frac{GD^2}{4g}$$

$$T'_M = 2 \times T_M$$

T_L : Rotation Torque (rapid)

f : Safe factor (choose 1.4 for this case)

$$t_a = \frac{(334.3+750)}{4 \times 980 \times (2 \times 230 - (18.1+33.6))} \times \frac{2\pi \times 1400}{60} \times 1.4 = 0.139 \text{ (sec)} < 0.15 \text{ (sec)}$$

This above motor specifications match design needs.

Calculating the stress of the Ballscrew

$$\sigma = \frac{F}{A} = \frac{F_{max}}{\pi dr^2/4} = \frac{1140 \times 9.8 \times 4}{\pi \times 35.05^2} = 11.56 \text{ N/mm}^2 = 1.16 \times 10^7 \text{ N/m}^2$$

(dr is screw shaft thread root diameter)

$$dr = 40 + 1.4 - 6.35 = 35.05 \text{ (mm)}$$

$$\tau = \frac{T \times r}{J} = \frac{21540 \times 20}{148167} = 2.91 \text{ N/mm}^2 = 2.91 \times 10^6 \text{ N/m}^2$$

$$T_{max} = T_L = 219.8(\text{kgf cm}) = 21540 (\text{N-mm})$$

$$J = \frac{\pi dr^4}{32} = \frac{\pi(35.05^4)}{32} = 148167 (\text{mm}^4)$$

$$\begin{aligned} \sigma_{max} &= \sqrt{\sigma^2 + \tau^2} \\ &= 11.9 \times 10^6 \text{ N/m}^2 \end{aligned}$$

50CrMo4 steel tension strength is $1.1 \times 10^8 \text{ N/m}^2 > \sigma_{max}$

Yield strength is $0.9 \times 10^8 \text{ N/m}^2 > \sigma_{max}$

◎So the Ballscrew selected is safe.

Calculating the buckling load of the screw shaft

$$P = \alpha \frac{\pi^2 n EI}{L^2} = m \frac{dr^4}{L^2} \times 10^3 = 20.3 \times \frac{35.05^4}{1100^2} \times 10^3 = 25300 (\text{kgf}) > F_{max} (1140 \text{ kgf})$$

◎So the Ballscrew selected is safe.

High Speed Portage Apparatus (Horizontal application)

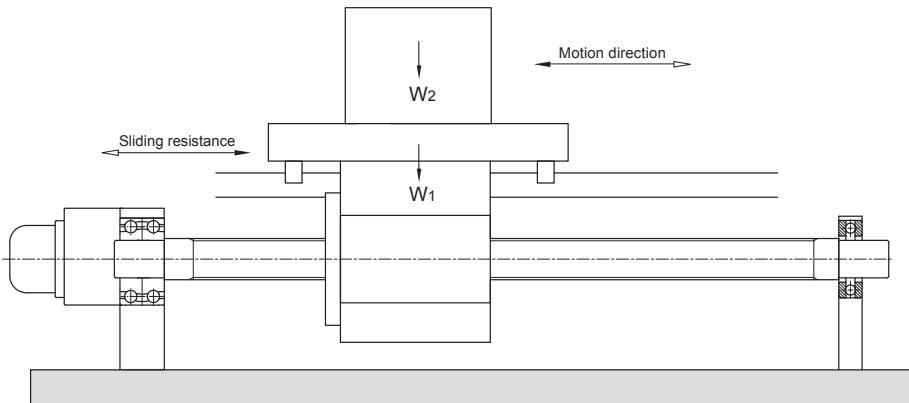


Fig.34 High speed portage apparatus

Design Conditions

Table weight:	$W_1 = 50 \text{ kg}$
Work piece weight:	$W_2 = 25 \text{ kg}$
Max. travel:	$S_{max} = 1000 \text{ mm}$
Rapid feed speed:	$V_{max} = 50 \text{ m/min}$
Life:	$L_i = 25000 \text{ hours}$
Guiding surface friction coefficient:	$\mu = 0.01$
Driving motor:	$N_{max} = 3000 \text{ rpm}$
Positioning Accuracy:	$\pm 0.10 \text{ at max. travel}$
Repeatability Accuracy:	$\pm 0.01 \text{ mm}$

Motion Conditions

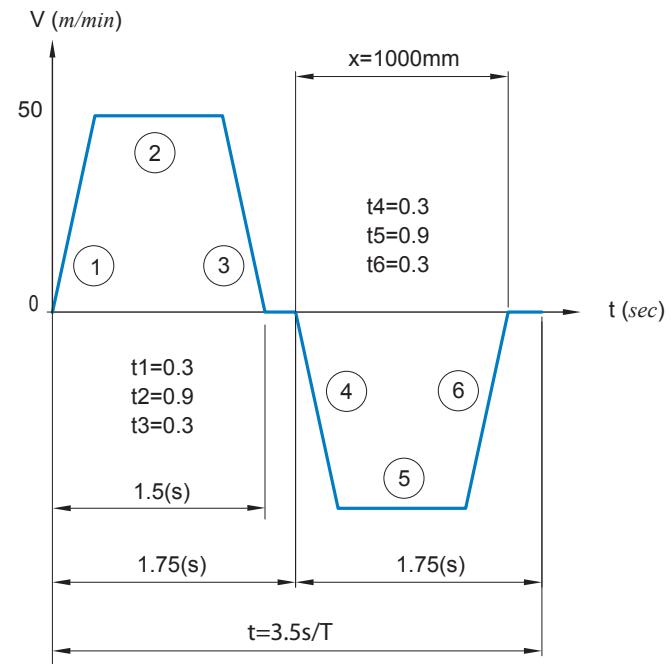


Fig.35 Portage apparatus v-t diagram

Items to be decided

- Screw nominal O.D., Lead
- Accuracy grade
- Type of nut
- Driving motor

Selecting Screw nominal O.D., Lead

- Lead (l)

The highest rotation speed of motor

$$l \geq \frac{V_{max}}{N_{max}} = \frac{50000}{3000} \approx 17 \text{ (mm)}$$

◎Lead have to be 18 mm or more.

(As per PMI catalog : select 20 mm for further analysis)

If lead is 20 mm, the highest rapid feed speed 50 m/min shall be reached as long as the motor rotates at 2500 rpm.

- Initial selection of screw shaft length

$L = \text{Max. travel} + \text{Nut length} + \text{Unthreaded area length}$

$$= 1000 + 100 + 100 = 1200 \text{ (mm)}$$

- Selecting screw shaft diameter

Ballscrew shaft diameter can be decided by critical rotation speed of high speed feed.

Assume the supporting ends are fixed-supported.

So the permissible rotational speed :

$$n = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{EIg}{rA}} = f \frac{dr}{L^2} \times 10^7$$

$$\Rightarrow dr \geq \frac{n \times L^2}{f} \times 10^7$$

$L = \text{Max. travel} + \text{Nut length}/2 + \text{Unthread area length}$

$$= 1000 + 50 + 100 = 1150 \text{ (mm)}$$

Screw shaft support method is fixed-supported

$$f = 15.1$$

$$dr \geq 21.9 \text{ (mm)}$$

If the high rotational speed is 2500 rpm,

Diameter at thread root area must be bigger than 22 mm.

◎So Screw-shaft diameter shall be ranged in between 25 and 36 mm

- Considering service life

First to analyze Fig.35[A1-83] (V-t diagram)

The speed line is a straight one, hence it is a constant acceleration, periodically reciprocating motion.

Maximum velocity : $V_{max} = 50 \text{ (m/min)} = 0.83 \text{ (m/s)}$

Acceleration time : $t_1 = 0.3 \text{ (s)}$

Deceleration time : $t_3 = 0.3 \text{ (s)}$

a. Running distance during acceleration

$$x_1 = \left(\frac{V_0 + V}{2} \right) \times t = \left(\frac{0 + 0.83}{2} \right) \times 0.3 \\ = 0.125 \text{ (m)} = 125 \text{ (mm)}$$

b. Running distance during constant speed

$$x_2 = V \cdot t = 0.83 \times 0.9 \\ = 0.75 \text{ (m)} = 750 \text{ (mm)}$$

c. Running distance from highest speed to stop

$$x_3 = \left(\frac{V_0 + V}{2} \right) \times t = \left(\frac{0.83 + 0}{2} \right) \times 0.3 = 0.125 \text{ (m)} = 125 \text{ (mm)}$$

d. The line segment

$$a_1 = \frac{V_{max}}{t_1} = \frac{0.833}{0.3} = 2.8 \text{ (m/s}^2\text{)}$$

$$F_1 = \mu (W_1 + W_2) \times g + (W_1 + W_2) \times a_1 = 0.01 \times (50 + 25) \times 9.8 + (50 + 25) \times 2.8 = 217 \text{ (N)}$$

$$N_1 = n_{max} / 2 = 2500 / 2 = 1250 \text{ (rpm)}$$

e. The line segment

$$F_2 = f = \mu (W_1 + W_2) \times g = 0.01 \times (50 + 25) \times 9.8 = 7.35 \text{ (N)}$$

$$N_2 = 2500 \text{ (rpm)}$$

f. The line segment

$$F_3 = \mu(W_1+W_2) \times g + (W_1+W_2) \times a_3 = 0.01 \times (50+25) \times 9.8 + (50+25) \times (-2.8) = -203 \text{ (N)}$$

$$N_3 = n_{max}/2 = 2500/2 = 1250 \text{ (rpm)}$$

Whence the relationship between the applied axial load, running distance, time and mean rotation can be as follows:

Motion	Axial load	Running distance	Time	Mean rotation
Acceleration forward	217	125	0.3	1250
Constant speed forward	7.35	750	0.9	2500
Deceleration forward	-203	125	0.3	1250
Acceleration returning	-217	125	0.3	1250
Constant speed returning	-7.35	750	0.9	2500
Deceleration returning	203	125	0.3	1250

g. Calculation of mean load and mean rotation:

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{1}{3}} = \left(\frac{217^3 \times 1250 \times 0.6 + 7.35^3 \times 2500 \times 1.8 + 203^3 \times 1250 \times 0.6}{1250 \times 0.6 + 2500 \times 1.8 + 1250 \times 0.6} \right)^{\frac{1}{3}}$$

$$= 132.4 \text{ (N)}$$

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t} = \frac{1250 \times 0.6 + 2500 \times 1.8 + 1250 \times 0.6}{3.5} = 1714 \text{ (rpm)}$$

h. Calculation of life

$$L_t = \left(\frac{Ca}{F_m \times f_w} \right)^3 \times \frac{1}{60N_m} \times 10^6 = \left(\frac{1170 \times 9.8}{132.4 \times 2.5} \right)^3 \times \frac{1}{60 \times 1714} \times 10^6$$

$$= 404000 \geq 25000 \text{ (hours)}$$

② Above conforms design requirements.

Selecting accuracy grade

Positioning accuracy of $\pm 0.1/1000$ mm (Max. travel) From page.A1-6

Accuracy grade: C5

$$E = \pm 0.040/1000$$

$$e = 0.027$$

Selecting Ballscrew type

Considering operation conditions, effective turns of A1 is selected.

Selecting following type:

R25-20A1-FSWE-1000-1160-0.018

Screw-shaft support method is fixed-supported

Selecting driving motor

<Required specifications>

1.The highest rotation speed of 3000 (rpm)

2.Time required to reach highest rotational speed is within 0.30 sec

- Inertial

a. Screw shaft:

$$J_{sh} = \frac{\pi \rho}{32g} \times D^4 \times L = \frac{\pi \times 7.8 \times 10^{-3}}{32 \times 980} \times 2.5^4 \times 120 = 0.0037 \text{ (kgf.cm.sec}^2\text{)}$$

b. Moving parts:

$$J_w = \frac{W}{g} \left(\frac{l}{2\pi} \right)^2 = \frac{25+50}{980} \left(\frac{2}{2\pi} \right)^2 = 0.0078 \text{ (kgf.cm.sec}^2\text{)}$$

c. Coupling:

$$J_c = 0.0005 \text{ (kgf.cm.sec}^2\text{)}$$

d.Total of Inertial:

$$J_L = J_{sh} + J_w + J_c = 0.012 \text{ (kgf.cm.sec}^2\text{)}$$

- Driving torque

a. During constant speed:

$$T_L = \frac{F_2 \times l}{2\pi \times \eta} = \frac{7.35 \times 2}{2\pi \times 0.9} = 2.6 \approx 3.00 \text{ (N.cm)}$$

$$\eta = 0.9$$

b. During acceleration

$$T_2 = T_L + J \dot{\omega} = T_L + (J_L + J_M) \times \frac{2\pi n}{60 t_i} = 3 + (0.009 + 0.01) \times 9.8 \times \left(\frac{2\pi \times 2500}{60 \times 0.3} \right) = 166 \text{ (N.cm)}$$

preselect motor, and give the specifications for the rate inertia

$$J_M = 0.01 \text{ (kgf.cm.sec}^2)$$

c. During deceleration

$$T_3 = T_L - J \dot{\omega} = T_L - (J_L + J_M) \times \frac{2\pi n}{60 t_3} = 3 - (0.009 + 0.01) \times 9.8 \times \left(\frac{2\pi \times 2500}{60 \times 0.3} \right) = -160 \text{ (N.cm)}$$

- Selecting driving motor

<Selecting conditions>

a. The highest rotation speed: $N_{max} \geq 3000 \text{ (rpm)}$

b. Rated torque ----- $T_M > T_L$

c. Rotor inertia ----- $J_M \leq J_L / 3$

The specifications required for driving motor are then decided as per above conditions.

◎Motor specifications:

Output	$W_M = 400 \text{ (kW)}$
Highest rotation speeds	$N_{max} = 3000 \text{ (rpm)}$
Rated torque	$T_M = 1.27 \text{ (N.m)}$
Rotor inertia	$J_M = 0.01 \text{ (kgf.cm.sec}^2)$

- Effective torque:

$$T_{rms} = \sqrt{\frac{T_2^2 \times t_a + T_L^2 \times t_b + T_3^2 \times t_c}{t}} = \sqrt{\frac{166^2 \times 0.6 + 3^2 \times 1.8 + 160^2 \times 0.6}{3.5}} = 95 \text{ (N.cm)} < 127 \text{ (N.cm)}$$

◎ It conforms to design requirements.

- Time required to reach highest rotational speed.

$$t_a = \frac{J}{T_M - T_L} \times \frac{2\pi n}{60} \times f$$

Here:

J : Total inertia

$$T_M' = 2 \times T_M$$

T_L : Rotation Torque (rapid)

f : Safe factor (choose 1.4 for this case)

$$t_a = \frac{0.009 + 0.01}{2 \times 127 \times 3} \times 9.8 \times \frac{2\pi \times 2500}{60} \times 1.4 = 0.27 \text{ (s)} < 0.3 \text{ (s)}$$

◎ It conforms to design requirements.

Calculating the stress of the Ballscrew

$$\sigma = \frac{F}{A} = \frac{F_{max}}{\pi d r^2 / 4} = \frac{217 \times 4}{\pi \times 22,425^2} = 0.61 \text{ N/mm}^2 = 6.1 \times 10^5 \text{ N/m}^2$$

$$dr = 25 + 1 - 4.762 = 21.238 \text{ (mm)}$$

(dr is screw shaft thread minor diameter)

$$\tau = \frac{T \times r}{J} = \frac{1660 \times 12.5}{24827} = 0.84 \text{ N/mm}^2 = 8.4 \times 10^5 \text{ N/m}^2$$

$$T_{max} = T_L = 166 \text{ (N.cm)} = 1660 \text{ (N.mm)}$$

$$J = \frac{\pi dr^4}{32} = \frac{\pi (22,425^4)}{32} = 24827 \text{ (mm}^4)$$

$$\sigma_{max} = \sqrt{\sigma^2 + \tau^2} = 0.10 \times 10^8 \text{ N/m}^2$$

50CrMo4 steel tension strength is $1.5 \times 10^8 \text{ N/m}^2$

Yield strength is $0.9 \times 10^8 \text{ N/m}^2$

◎ So the Ballscrew selected is safe.

Calculating the buckling load of the screw shaft

$$P = \alpha \frac{\pi^2 n EI}{L^2} = m \frac{dr^4}{L^2} \times 10^3 \\ = 10.2 \times \frac{22,425^4}{1160^2} \times 10^3 \\ = 1917 \text{ (kgf)} > F_{max} (22.14 \text{ kgf})$$

◎ So the Ballscrew selected is safe.

Vertical Portage Apparatus

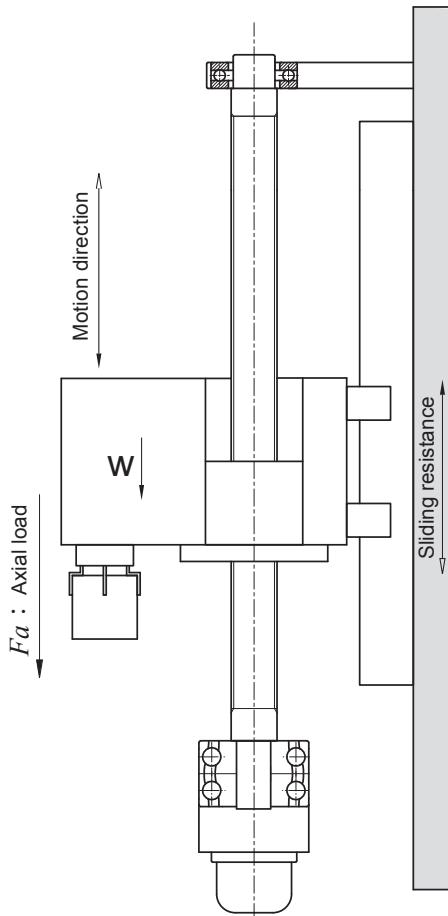


Fig.36 Vertical portage apparatus

Design Conditions

Table weight:	$W_1 = 300 \text{ kg}$
Work piece weight:	$W_2 = 50 \text{ kg}$
Max. travel:	$S_{max} = 1500 \text{ mm}$
Rapid feed speed:	$V_{max} = 15 \times 10^3 \text{ mm/min}$
Life:	$L_t = 20000 \text{ hours}$
Guiding surface friction coefficient:	$\mu = 0.01$
Driving motor:	$N_{max} = 1500 \text{ rpm}$
Positioning accuracy:	$\pm 0.8/1500 \text{ mm}$
Repeatability accuracy:	$\pm 0.3 \text{ mm}$

Motion Conditions

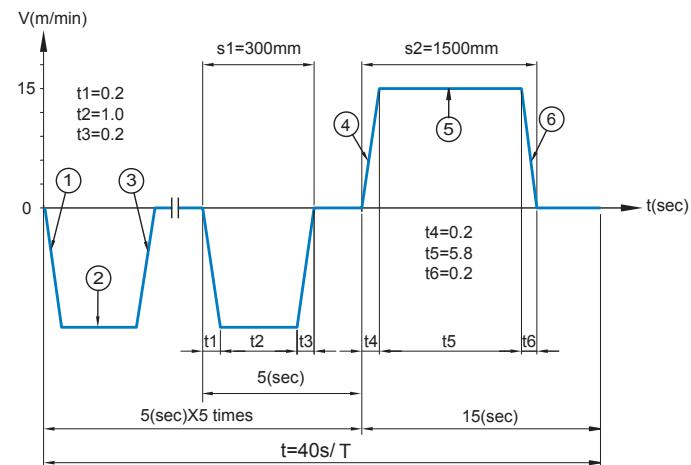


Fig.37 Portage apparatus v-t diagram

Items to be decided:

- Accuracy grade
- Screw nominal O.D., Lead
- Driving motor

Selecting accuracy grades

As per design condition: positioning accuracy required: 0.8/1500 mm

$$\frac{\pm 0.8}{1500} = \frac{\pm 0.16}{300}$$

Refer to **Table 2[A1-6]**, accumulated reference lead deviation ($\pm E$) and total relative variation (e)

Accuracy grades C7

$$E = \pm 0.05/300 \text{ mm}$$

◎ So the portage apparatus can use Rolled Ballscrew.

Selecting screw nominal O.D., Lead

- Lead (l) :

The highest rotation speed of motor

$$l \geq \frac{V_{max}}{N_{max}} = \frac{15000}{1500} = 10 \text{ (mm)}$$

◎ Lead have to be 10 mm or more.

(As per PMI catalog : select 10 mm for further analysis)

- Permissible axial load

Setting up is positive.

a. Force during acceleration (downward)

$$a_l = \frac{V_{max}}{t_l} = \frac{15000}{60 \times 0.2} = 1250 \text{ (mm/s}^2\text{)} = 1.25 \text{ (m/s}^2\text{)}$$

$$f = \mu (W_1 + W_2) \times g = 0.01(300+50) \times 9.8 = 35 \text{ (N) (Friction)}$$

$$F = ma \rightarrow F_l = (W_1 + W_2) \times g - f = 2958 \text{ (N)}$$

b. Force during constant speed (downward)

$$F = 0 \rightarrow F_2 = (W_1 + W_2) \times g - f = 3395 \text{ (N)}$$

c. Force during deceleration (downward)

$$F = ma \rightarrow F_3 = (W_1 + W_2) \times g - f + (W_1 + W_2) \times a_3 = 3833 \text{ (N)}$$

d. Force during acceleration (upward)

$$F = ma \rightarrow F_4 = (W_1 + W_2) \times g + f + (W_1 + W_2) \times a_4 = 3903 \text{ (N)}$$

e. Force during constant speed (upward)

$$F = 0 \rightarrow F_5 = (W_1 + W_2) \times g + f = 3465 \text{ (N)}$$

f. Force during deceleration (upward)

$$F = ma \rightarrow F_6 = (W_1 + W_2) \times g + f - (W_1 + W_2) \times a_6 = 3028 \text{ (N)}$$

So

$$Fa_{max} = F_4 = 3903 \text{ (N)}$$

- Buckling load:

$$P = \alpha \frac{\pi^2 n EI}{L^2} = m \frac{dr^4}{L^2} \times 10^3$$

$$dr = \left(\frac{P \times L^2}{m} \times 10^{-3} \right)^{1/4} = \left(\frac{3903 \times 1800^2}{9.8 \times 10.2} \times 10^{-3} \right)^{1/4}$$

$$= 19 \text{ (mm)}$$

Screw shaft diameter at thread root area must be bigger than 19 mm.

◎ So screw shaft diameter shall be ranged in between 25 and 50 mm.

- The length of screw shaft

$$L = \text{Max. travel} + \text{Nut length} + \text{Unthreaded area length} \\ = 1500 + 100 + 200 = 1800 \text{ (mm)}$$

Slenderness ratio: 60 or less

$$D \geq \frac{L}{60} = \frac{1800}{60} = 30 \text{ (mm)}$$

◎ So screw shaft diameter shall be ranged in between 32 and 50 mm.

- Permissible rotational speed

Assume the supporting ends are fixed-supported

So the permissible rotational speed:

$$n = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{EIg}{rA}} = f \frac{dr}{L^2} \times 10^7$$

$$\Rightarrow dr \geq \frac{n \times L^2}{f} \times 10^7 \quad (f=15.1, L=1800)$$

$$\geq 30$$

If the highest rotational speed reaches 1500 rpm, screw shaft thread diameter at thread root

area must be bigger than 30 mm.

◎ So screw shaft diameter shall be ranged in between 36 and 50 mm.

- Calculating of basic dynamic rate load:

Motion	Axial load (N)	Mean rotation (rpm)	Time (sec)
Acceleration (down)	$F_1=2958$	$n_1=750$	$t_1=1.0$
Constant speed (down)	$F_2=3395$	$n_2=1500$	$t_2=5.0$
Deceleration (down)	$F_3=3833$	$n_3=750$	$t_3=1.0$
Acceleration (up)	$F_4=3903$	$n_4=750$	$t_4=0.2$
Constant speed (up)	$F_5=3465$	$n_5=1500$	$t_5=5.8$
Deceleration (up)	$F_6=3028$	$n_6=750$	$t_6=0.2$

Mean load

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{1}{3}} = 3436 \text{ (N)}$$

Mean rotation

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t} = 450 \text{ (rpm)}$$

As per design condition:

Life required is 20000 hours, Let $f_w=1.2$

$$L_t = \left(\frac{Ca}{F_m \times f_w} \right)^3 \times \frac{l}{60N_m} \times 10^6$$

$$Ca = (60N_m \times l)^{1/3} \times F_m \times f_w \times 10^{-2} = 33576 \text{ (N)} = 3426 \text{ (kgf)}$$

◎ If the life required is > 20000 (hours),
Ca has to be > 3426 (kgf)

- Calculating basic static rate load:

$$Co = F_{max} \times f_s \quad f_s = 2.0$$

$$= 7806 \text{ (N)}$$

$$= 800 \text{ (kgf)}$$

Co has to be > 800 (kgf)

◎ Selection is made as follows:

Type of the Ballscrew: 40-10B2-FSWW

Screw shaft diameter: 40 (mm)

Lead:10 (mm)

Basic dynamic rate load: 3520 (kgf)

Selecting driving motor

<Required specifications>

The highest rotation speeds is 1500 mm/min

Time required to reach highest rotational speed is within 0.2 sec.

- Inertial

a. Screw shaft:

$$GD_s^2 = \frac{\pi\rho}{32} \times D^4 \times L = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 4^4 \times 180 = 35.29 \text{ (kgf.cm}^2\text{)}$$

b. Moving parts:

$$GD_w^2 = W \left(\frac{l}{\pi} \right)^2 = (300+50) \times \left(\frac{1.0}{\pi} \right)^2 = 192.5 \text{ (kgf.cm}^2\text{)}$$

c. Coupling:

$$GD_J^2 = 1.0 \text{ (kgf.cm}^2\text{)}$$

d. Total of Inertial:

$$GD_L^2 = GD_s^2 + GD_w^2 + GD_J^2 = 228.79 \text{ (kgf.cm}^2\text{)}$$

- Driving torque:

(1) Friction torque

a. Acceleration (downward):

$$T_1 = \frac{Fa \times l}{2\pi \times \eta} = \frac{2950 \times 1.0}{2\pi \times 0.9} = 520 \text{ (N.cm)}$$

b. Constant speed (downward):

$$T_2 = \frac{Fa \times l}{2\pi \times \eta} = \frac{3395 \times 1.0}{2\pi \times 0.9} = 600 \text{ (N.cm)}$$

c. Deceleration (downward):

$$T_3 = \frac{Fa \times l}{2\pi \times \eta} = \frac{3833 \times 1.0}{2\pi \times 0.9} = 680 \text{ (N.cm)}$$

d. Acceleration (upward):

$$T_4 = 690 \text{ (N.cm)}$$

e. Constant speed (upward):

$$T_5 = 610 \text{ (N.cm)}$$

f. Deceleration (upward):

$$T_6 = 540 \text{ (N.cm)}$$

(2) Preloading torque

No preload is applied to the roller ballscrew, so the preload torque is zero.

(3) Torque required for acceleration:

$$T_7 = J \cdot w \\ = (J_L + J_M) \times \frac{2\pi n}{60t_i} = \frac{(228.79+120)}{980} \times \left(\frac{2\pi \times 1500}{60 \times 0.2} \right) = 279.53 \text{ (kgf.cm)} = 2739 \text{ (N.cm)}$$

First select motor's specification

$$GD_M = 120 \text{ (kgf.cm^2)}$$

(4) Total torque:

a. Acceleration (downward):

$$T_{k1} = T_1 + T_7 = 520 + 2739 = 3259 \text{ (N.cm)}$$

b. Constant speed (downward):

$$T_{tl} = T_2 = 600 \text{ (N.cm)}$$

c. Deceleration (downward):

$$T_{g1} = T_3 + T_7 = 680 + 2739 = 3419 \text{ (N.cm)}$$

d. Acceleration (upward):

$$T_{k2} = T_4 + T_7 = 690 + 2739 = 3429 \text{ (N.cm)}$$

e. Constant speed (upward):

$$T_{t2} = T_5 = 610 \text{ (N.cm)}$$

f. Deceleration (upward):

$$T_{g2} = T_6 + T_7 = 540 + 2739 = 3279 \text{ (N.cm)}$$

The maximum torque takes place at the time of acceleration.

$$T_{max} = T_{k2} = 3429 \text{ (N.cm)}$$

- Selecting driving motor

<Selecting conditions>

a.The highest rotation speeds: $N_{max} \geq 1500 \text{ (rpm)}$

b.Rated torque: $T_M = T_{rms}$

c.Rotor inertia: $J_M \geq J_L/3$

The specifications required for driving motor are then decided as per above conditions

◎Motor specifications:

Output $W_M = 2000 \text{ (W)}$

Highest rotation speeds $N_{max} = 1500 \text{ (rpm)}$

Rated torque $T_M = 20 \text{ (N.m)}$

Rotor inertia $GD^2_M = 120 \text{ (kgf.cm}^2)$

- Effective torque:

$$\begin{aligned} T_{rms} &= \sqrt{\frac{T_{k1}^2 \times t_1 + T_{t1}^2 \times t_2 + T_{g1}^2 \times t_3 + T_{k2}^2 \times t_4 + T_{t2}^2 \times t_5 + T_{g2}^2 \times t_6}{t}} \\ &= \sqrt{\frac{3259^2 \times 1.0 + 600^2 \times 5 + 3419^2 \times 1 + 3429^2 \times 0.2 + 610^2 \times 5.8 + 3279^2 \times 0.2}{20}} \\ &= 607.93 \text{ (N.cm)} < 2000 \text{ (N.cm)} \end{aligned}$$

◎It conforms to design requirements.

Calculating the stress of the Ballscrew

$$\begin{aligned} \sigma &= \frac{F}{A} = \frac{F_{max}}{\pi dr^2/4} \\ &= \frac{3903 \times 9.8 \times 4}{\pi \times 35.05^2} \quad dr = 40 + 1.4 - 6.35 = 35.05 \text{ (mm)} \\ &= 4.04 \text{ N/mm}^2 \quad (dr \text{ is screw shaft thread root diameter}) \\ &= 4.04 \times 10^6 \text{ N/m}^2 \\ \tau &= \frac{T \times r}{J} \quad T_{max} = T_L = 3429 \text{ (N.cm)} = 34290 \text{ (N.mm)} \\ &= \frac{34290 \times 20}{148167} \quad J = \frac{\pi dr^4}{32} = \frac{\pi (35.05^4)}{32} = 148167 \text{ (mm}^4) \\ &= 4.63 \text{ N/mm}^2 \\ &= 4.63 \times 10^6 \text{ N/m}^2 \\ \sigma_{max} &= \sqrt{\sigma^2 + \tau^2} \\ &= 6.14 \times 10^6 \text{ N/m}^2 \end{aligned}$$

50CrMo4 steel tension strength is $1.1 \times 10^8 \text{ N/m}^2$

Yield strength is $0.9 \times 10^8 \text{ N/m}^2$

◎So the Ballscrew selected is safe.

Calculating the buckling load of the screw shaft

$$\begin{aligned} P &= \alpha \frac{\pi^2 n EI}{L^2} = m \frac{dr^4}{L^2} \times 10^3 \\ &= 10.2 \times \frac{35.05^4}{1800^2} \times 10^3 \\ &= 4751 \text{ (kgf)} > F_{max} (398 \text{ kgf}) \end{aligned}$$

◎So the Ballscrew selected is safe.

PMI Ballscrew Cooling System

PMI's design of hollow cooling system is especially good for high speed Ballscrews. It shall well dissipate heat generated by friction between balls and grooves during Ballscrew running, and then to minimize thermal deformation as to ensure positioning accuracy.

Introduction to Hollow Cooling Screw Shaft

The hollow cooling system is designed by PMI (Fig.38) It uses a coolant pipe through the hollow hole of Ballscrew. The hollow hole is through all of the Ballscrew, and one end is clogged with the oil seal. The coolant is pumped into coolant pipe and flow to the end of coolant pipe. Coolant then flow reversely along the hollow hole back into the coolant collector. It can cool down the Ballscrew. The coolant is then sucked back to the cooling unit to drop coolant temperature and pumped again to the coolant pipe to complete circulation.

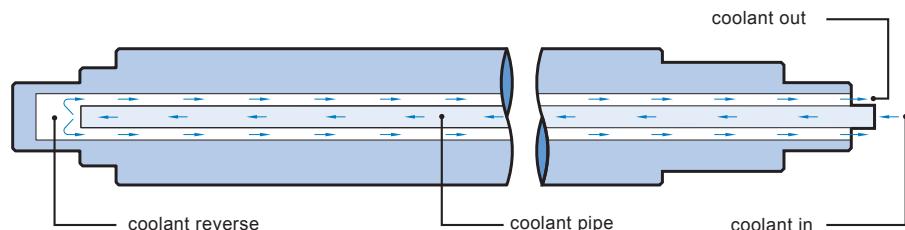


Fig.38 Hollow cooling diagram

Hollow Cooling Screw Shaft Related Introduction

Hollow cooling system

Features:

- (1)Well and effectively control Ballscrew thermal expansion.
- (2)Simple design and structure to save cost.



Fig.39 Hollow cooling system

Cooling entrance

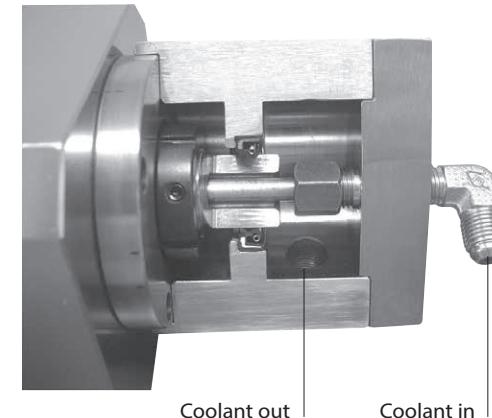


Fig.40 Cooling entrance

End sealing

Features: Easy for installing, disassembling and maintenance.

Coolant pipe support installation

Supported the coolant pipe. Let it don't touch Ballscrew.

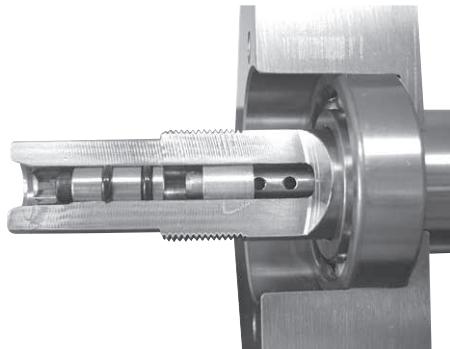


Fig.41 End sealing structure

The results of experiment

As per the results by experiment, PMI's design of hollow cooling system proves an effective way for controlling the thermal expansion on the Ballscrew. Hence it is a very helpful design to high precision machine tools.

◆ No cooling
■ Hollow cooling

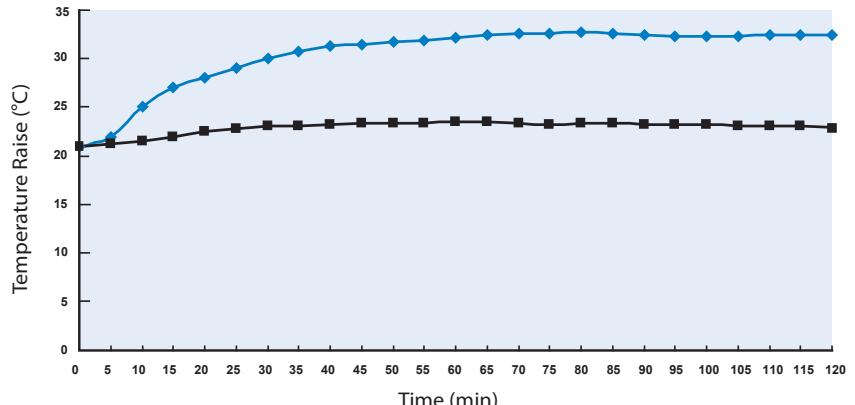


Fig.42 The results of experiment

Thermal control experiment

Test condition

Screw nominal O.D.: Ø40 mm

Lead: 10 mm

Rotation speed: 1000 min⁻¹

Speed: 10 m/min

Load: 400 kgf

Slideways: Box ways

Nut Cooling

The principle of design

Cool liquid is able to control the heat generation and thermal expansion by creating circulating cooling channel in the nut.

Type A - Recirculation Type Cooling

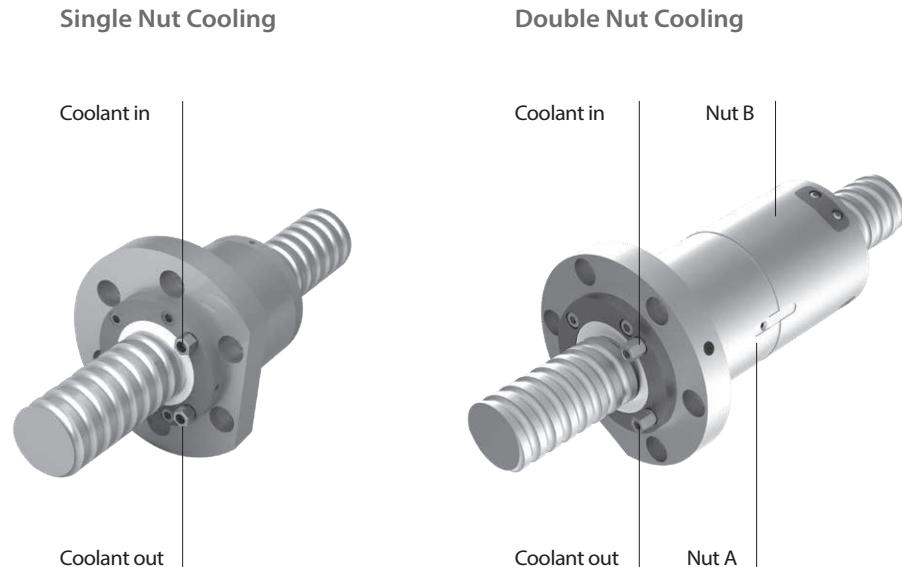


Fig.43 Single nut cooling and Double nut cooling diagram

Table 21 Recirculation type cooling nut- Testing Parameters

Model no.	R45-12T5-FDDA-1274-1569-0.018
Operation travel(mm)	690
Feed speed(m/min)	7.2
Mean rotation (rpm)	523.3
Acceleration (m/s ²)	5
Preload (kgf)	392
Table weight (kgf)	200
Mounting method	fixed-supported
Coolant	Mobil Velocite oil no.3 (ISO VG 2)
Coolant flow (L/min)	3.1
Coolant Temperature (°C)	Room temperature ±0.5

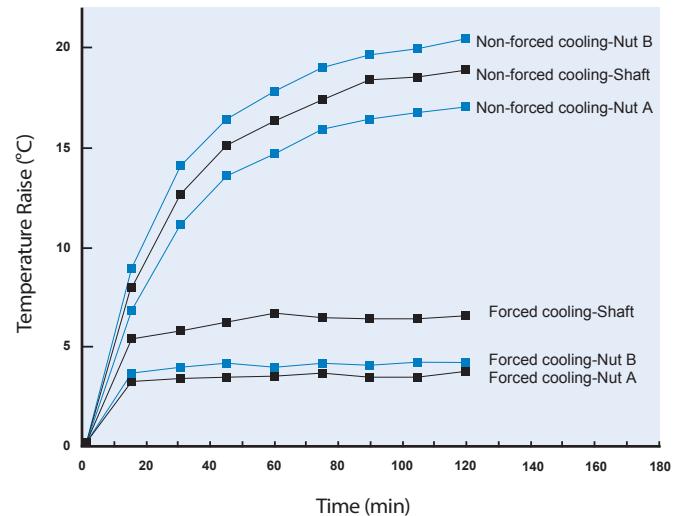


Fig.44 The results of experiment

Type B - Direct Passing Type Cooling

Cooling liquid at the same time enter the cooling channel of nut by direct passing, it's better cooling rate than recirculation channel type.

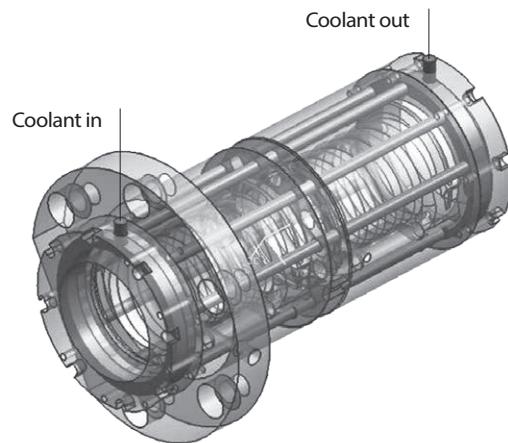


Fig.45 Direct passing type

Characteristics

Increase the positioning accuracy and the stability

Control the temperature rise of the ballscrew and reduced the heat deformation. The high velocity and accuracy of the machine will be reached.

Decrease the warm-up time of machine

The stable temperature of the ballscrew be quickly, so the warm-up time of the machine could be shortened.

Maintain capability of the lubrication oil

When the temperature of the ballscrew is stabilized, it is able to avoid the deterioration of the lubrication caused by high temperature.

Table 22 Recirculation type and Direct passing type cooling nut- Testing Parameters (FDDB type has 3 coolant inlets)

Model no.	R45-12T5-FDDA-1274-1569-0.018 R45-12T5-FDBB-1274-1569-0.018
Operation travel(mm)	690
Feed speed(m/min)	7.2
Mean rotation (rpm)	550
Acceleration (m/s ²)	5
Preload (kgf)	392
Table weight (kgf)	250
Mounting method	fixed-supported
Coolant	Mobil Velocite oil no.3 (ISO VG 2)
Coolant flow (L/min)	3.1
Coolant Temperature (°C)	Room temperature ±0.5°C

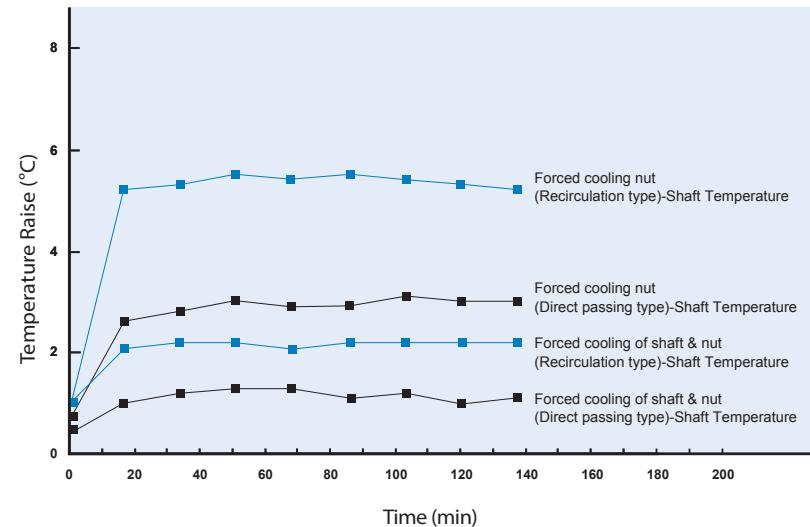


Fig.46 Recirculation type & Direct passing type Comparison

Options

Nomenclature

Example: R45-12T5-FDDA-700-800-0.008

A (Recirculation type cooling)

B (Direct passing type cooling)

Cooling Nut Applications

CNC Machine / Precision Machine / High Speed Machine / Medical equipment

Ball screw of High Dustproof

The ballscrew which is applied to particular environment is easily affected by foreign matters like metal and wood dust intruding inside the screw and affecting the lifetime. In order to prevent from this, high dust-proof series accessories are designed. The special groove design of ballscrew can make the internal dust-proof and sealed washer of wiper fully attached the surface of whorl, and achieves the double effect of dust-free and dust-proof.

As the ballscrews comes with specially designed grooves, the highly dustproof seal washer inside the scraper perfectly matches the threads, a feature that ensures the removal of scraps as well as insulation dust.

Type A2 : Rubber Seal

Wiper specially developed for ball screws, with a multi-layered contact lips structure that ensures effective dust removal, the contact Gothic arch thread of bulgy shape and the lips interference outside diameter of screw shaft, so the dust can't entry inside of nut. As the ballscrews comes with specially designed grooves, the highly dustproof seal washer inside the scraper perfectly matches the threads, a feature that ensures the removal of scraps as well as insulation dust.

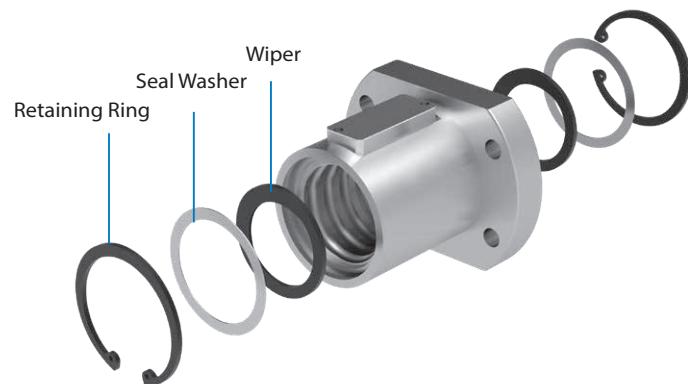


Fig.47 Assembly of rubber seal

Table 23 High dustproof Test Conditions

Specifications	R40-10-FSVE
Running Stroke	300 mm (per cycle)
Motor Speed	150 rpm
Test Environment	Sawdust automatic circulation system

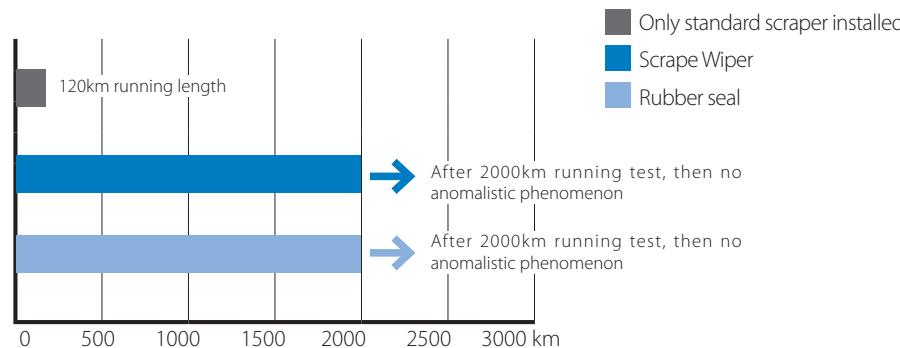


Fig.48 Dustproof performance Comparison

Type A3: Film Seal

The dustproof seals develop focus on general tool machine industrial that doesn't obviously increase of preload torque and temperature rise. Inhibit the grease leakage and scattering achieve cleaner operating environment. Provide the kind of seals that have better strength, service life and prevent fine dust or metal bit into the nut.

Heat generates and preload torque

The preload torque increase only 1~2 kgf-cm with film seals for ballscrew. Compare with non contact wiper, the suppression temperature rise at 1.5~2°C

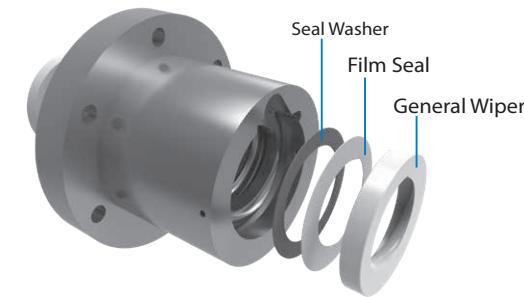


Fig.49 Assembly of a Film seal

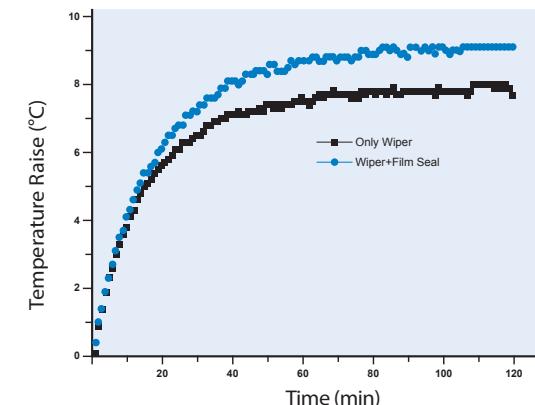


Fig.50 Heat generation comparison

Nomenclature

Example: R 32-10 B2-FSVE-600-700-0.008 A2

A2 (Precision Grade + Rubber Seal),

A3 (Precision Grade + Film Seal)

B2 (Rolled Grade+ Rubber seal type),

B3 (Rolled grade + Film Seal)

Application of High Dustproof Ballscrew

Woodworking machine, laser processing machines, high accuracy transportation equipment, mechanical arms, and other machines that require a dustproof environment.

Extend the Maintenance Interval

The friction between the balls has been eliminated; the oil storage grooves design of Spacer and grease retention has been improved, the long-term maintenance-free operation is achieved.



Spacer Ball Screw


Structure and Features

The Ball Screw with the Spacer eliminates collision and friction between balls and increases the grease retention. This makes it possible to achieve a low noise, extends the lubrication maintenance interval and outstanding sliding.

Features


Low Noise, Soft Noise Tone and High Accuracy

With Spacer can avoid the interference sound among balls. And due to non-mutual friction thus increase heat generation, keep the accuracy in the range.

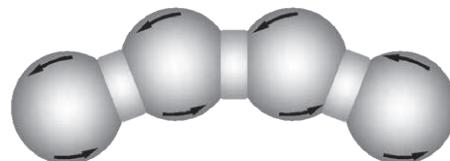

Smooth Motion


The use of a Spacer eliminates the friction between the balls, improves the torque feature, minimizes the torque fluctuation, and keeps constant speed during low-speed, thus high positioning accuracy to be achieved.

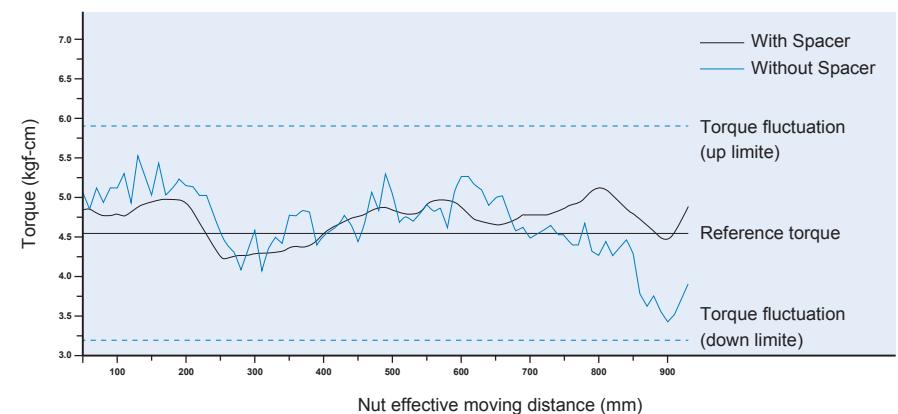

Self-Lubricant Unit-Q Lubricator

PMI lubricator unit is designed with an oil reservoir which equipped with a high-density fiber net. The lubricator feeds the right amount of lubricant to the raceway on the ballscrew. This allows an oil film to continuously be formed between the steel balls and the raceway, and drastically extends the lubrication and maintenance intervals.

Construction

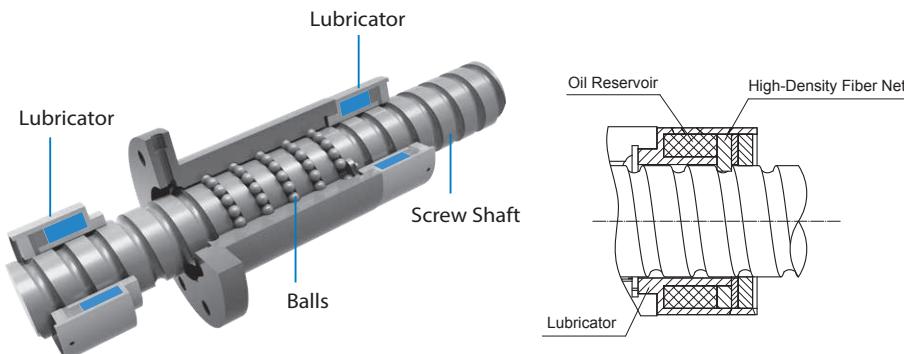

Features

Contrary to the oil losing problem caused by ordinary lubrication, the Q lubricator effectively and evenly distributes adequate amount of oil onto ball raceway during the movement.

- Lengthening the maintenance intervals
- Environmentally Friendly
- Without the installation of other lubricating device, the cost of overall equipment cost is reduce.

Fits the Following Type of Nuts

Internal Ball Circulation Nuts, External Ball Circulation Nuts, End Deflector Series

PMI Precision Ground BallScrew

Internal Ball Circulation Nuts

Features

The advantage of internal ball circulation nut is that the outer diameter is smaller than that of external ball circulation nut. Hence it is suitable for the machine with limit space for Ballscrew installation.

It is strictly required that there is at least one end of screw shaft with complete threads [A1-29] Also the rest area next to this complete thread must be with smaller diameter than the nominal diameter of the screw shaft. Above are required for easy assembling the ballnut onto the screw shaft.



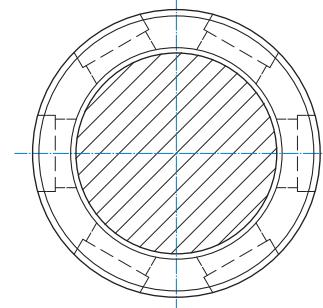


Fig.1 Internal ball circulation's side view

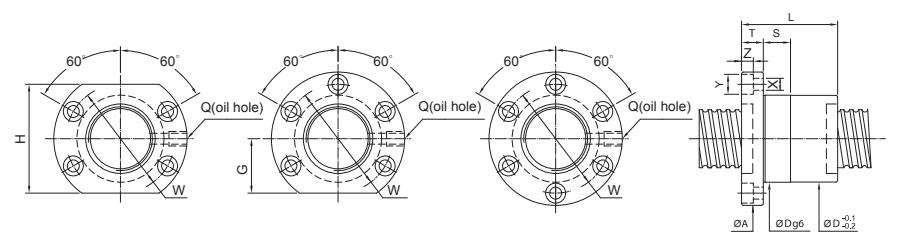


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/ μ m		
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z		
14	3	2	3	260	460	26	37	46	10	36	-	-	10	4.5	8	4.5	M6x1P	13
	4	2.381	3	420	805	26	42	46	10	36	20	40	10	4.5	8	4.5	M6x1P	14
	2.778	4	840	1870		47												21
	5	3.175	3	720	1010	26	42	46	10	36	20	40	10	4.5	8	4.5	M6x1P	16
	4	2.381	3	435	920	28	42	48.5	10	39	20	40	10	4.5	8	4.5	M6x1P	16
16	5	3.175	3	765	1240	30	42	49	10	39	20	40	10	4.5	8	4.5	M6x1P	18
	4	3.175	4	980	1650	49	49	10	39	20	40	10	4.5	8	4.5	M6x1P	23	
	6	3.175	4	980	1650	30	55	54	12	40	20	40	12	5.5	9.5	5.5	M6x1P	23
	4	2.381	4	600	1530	34	44	60	12	48	22	44	12	5.5	9.5	5.5	M6x1P	25
	3	860	1710			47												21
20	5	3.175	4	1100	2280	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6x1P	28
	6	3.175	4	1560	3420		62											42
	6	3.969	3	1080	2050	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6x1P	22
	4	3.969	4	1380	2730	61	57	12	45	20	40	12	5.5	9.5	5.5	M6x1P	28	
	10	3.175	3	860	1710	36	66	57	12	45	20	40	12	5.5	9.5	5.5	M6x1P	21
25	4	2.381	3	500	1440	40	40	63	12	51	22	44	15	5.5	9.5	5.5	M8x1P	23
	3	980	2300			47												26
	5	3.175	4	1250	3070	40	53	63.5	12	51	22	44	15	5.5	9.5	5.5	M8x1P	33
	5	1520	3830			57												42
	6	3.969	3	1275	2740	40	53	63.5	12	51	22	44	15	5.5	9.5	5.5	M8x1P	26
30	4	3.969	4	1630	3650	61	53	63.5	12	51	22	44	15	5.5	9.5	5.5	M8x1P	34
	8	3.969	4	1630	3650	40	69	63.5	12	51	22	44	15	5.5	9.5	5.5	M8x1P	34
	5	1970	4560			77												43
	3	980	2300			70												26
	4	1250	3070			81												33
35	3	1620	3205			80												27
	4	4.762	4	2070	4270	42	85	68.5	15	55	26	52	15	6.6	11	6.5	M8x1P	35
	5	2510	5340			91												44
	6	3.175	3	1030	2630	43	50	68	12	55	26	52	15	6.6	11	6.5	M8x1P	28
	10	3.175	4	1320	3510	45	77	73	12	60	30	60	15	6.6	11	6.5	M8x1P	37

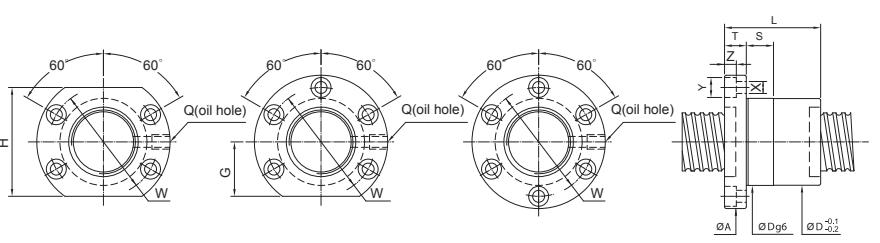


Unit:mm


SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/ μ m			
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z			
32	4	2.381	3	560	1840	43	40	68	15	55	26	52	15	6.6	11	6.5	M8x1P	28	
	5	870	3070			49	49											45	
	5	3.175	4	1095	3060			3	48	53	73.5	12	60	30	60	15	6.6	11	6.5
	6	1400	4080			48	53											41	
	6	1980	6120				62											60	
	6	3.969	4	1500	3750			53										32	
36	6	1920	5000	48	61	73.5	12	60	30	60	15	6.6	11	6.5	M8x1P		43		
	6	2720	7500			73												63	
	8	4.762	3	1820	4230	50	68	83	16	66	32	64	15	6.6	11	6.5	M8x1P	32	
	4	2330	5640			77												43	
	10	6.35	3	2605	5310	54	80	88	16	70	34	68	15	9	14	8.5	M8x1P	33	
	4	3340	7080			90												45	
40	12	6.35	3	2605	5310	54	86	88	16	70	34	68	15	9	14	8.5	M8x1P	33	
	5	3.175	4	1490	4690	52	56	88	16	70	34	68	15	9	14	8.5	M8x1P	46	
	8	4.762	4	2530	6630	55	73	88	16	72	29	58	15	9	14	8.5	M8x1P	48	
	10	6.35	3	2810	6210	58	78	98	18	77	36	72	20	11	17.5	11	M8x1P	37	
	4	3600	8280			89												49	
	4	1575	5290			56												49	
44	5	3.175	5	1910	6610	55	61	88.5	16	72	29	58	15	9	14	8.5	M8x1P	61	
	6	2230	7940			65												73	
	3	1660	4810			56												39	
	6	3.969	4	2130	6410	55	65	88.5	16	72	34	68	15	9	14	8.5	M8x1P	51	
	6	3020	9620			77												75	
	3	2120	5720			64												40	
46	8	4.762	4	2720	7620	60	77	93	16	76	36	72	20	9	14	8.5	M8x1P	52	
	6	3850	11430			94												77	
	10	6.35	3	3010	7100			83										41	
	4	3850	9470			64	93	106	18	84	43	86	20	11	17.5	11	M8x1P	53	
	5	4670	11830			99												67	
	3	3010	7100			82												41	
48	6	3.175	4	3850	9470	63	100	106	18	84	43	86	20	11	17.5	11	M8x1P	53	
	5	4670	11830			108												67	
	12	7.144	3	3010	9250	70	103	110	18	85	45	90	20	11	17.5	11	M8x1P	43	
	4	5130	12330			93												56	

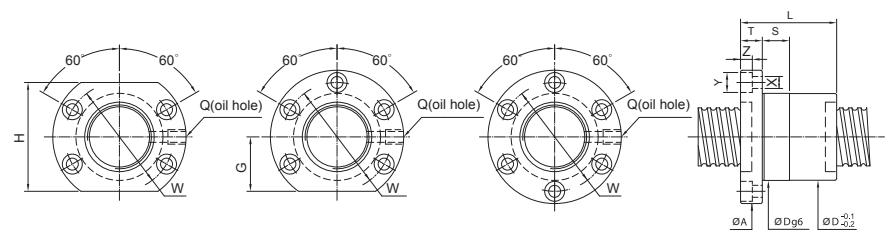

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/μm			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	
45	8	4.762	4	2870	8620	64	72	92	16	75	36	72	15	9	14.5	9	M6×1P	54
	12	7.144	3	4160	10750	70	86	110	16	90	42	84	20	11	17.5	11	PT1/8"	48
	12	7.144	4	5330	14330	99	99											62
	16	6.35	3	3220	8200	70	102	110	16	90	42	84	20	11	17.5	11	PT1/8"	45
	16	6.35	4	1730	6760	55												60
	5	3.175	5	2100	8450	66	61	98	16	82	36	72	20	9	14	8.5	PT1/8"	74
	6	3.175	6	2450	10140	65												86
	6	3.969	4	2380	8250	65												61
	6	3.969	5	2880	10310	66	64	98	16	82	36	72	20	9	14	8.5	PT1/8"	76
	6	3.969	6	3370	12380	77												90
50	4	3.175	4	3010	9610	79												63
	8	4.762	5	3650	12010	70	84	113	18	90	42	84	20	11	17.5	11	PT1/8"	77
	8	4.762	6	4260	14420	96												92
	3	3.175	3	3430	9300	83												49
	10	6.35	4	4390	12400	74	93	116	18	94	42	84	20	11	17.5	11	M8×1P	65
	5	3.175	5	5320	15500	99	99											80
	6	3.175	6	6220	18600	114												95
	7.144	4	5520	16330	75	104	121	22	97	47	94	20	14	20	13	PT1/8"	67	
	12	7.144	5	6690	20410	117												84
	7.938	3	4510	11150	75	99	121	22	97	47	94	20	14	20	13	PT1/8"	50	
	7.938	4	5770	14870	111													60
	16	6.35	3	3430	9300	74	104	116	18	94	42	84	20	11	17.5	11	PT1/8"	49
	20	7.938	3	4510	11150	78	146	121	28	97	47	94	20	14	20	13	PT1/8"	50

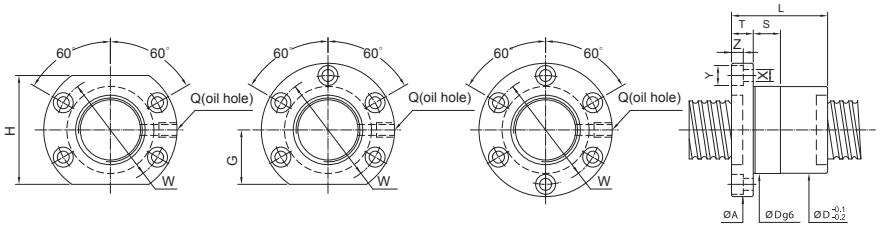


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/μm			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	
63	6	3.969	4	2610	10550	80	67	122	18	100	45	90	20	11	17.5	11	PT1/8"	73
	6	3.969	6	3700	15830	80	80											107
	8	4.762	4	3375	12200	82	80	124	18	102	46	92	20	11	17.5	11	PT1/8"	76
	8	4.762	6	4780	18300	96	96											111
	10	6.35	4	5020	16450	85	98	132	22	107	48	96	20	14	20	13	PT1/8"	79
	10	6.35	6	7110	24680	118	118											116
	12	7.938	4	6580	19430	90	111	136	22	112	52	104	20	14	20	13	PT1/8"	80
	12	7.938	6	9320	29150	136	136											111
	20	9.525	3	8490	23610	95	146	153	28	123	59	118	20	18	26	17.5	PT1/8"	79
	20	9.525	4	10870	31480	156	156											89
80	4	3.175	4	5510	21200	98												95
	10	6.35	5	6670	26500	105	105	151	22	127	57	114	20	14	20	13	PT1/8"	118
	6	3.175	6	7810	31800	118												140
	12	7.938	4	7500	25700	110	111	156	22	132	59	118	20	14	20	13	PT1/8"	98
	12	7.938	6	10620	38550	136	136											143
	20	9.525	3	9770	31700	115	146	173	28	143	66	132	20	18	26	17.5	PT1/8"	97
	20	9.525	4	12510	42270	168	168											127
	3	3.175	3	4760	20090	84												91
	10	6.35	4	6090	26790	95	95	171	22	147	67	134	25	14	20	13	PT1/8"	120
	5	3.175	5	7380	33490	104	104											148
100	6	3.175	6	8630	40190	115												176
	4	3.175	4	14440	54960	140												140
	16	9.525	5	17490	68700	135	157	205	28	169	73	146	30	18	26	17.5	PT1/8"	173
	6	3.175	6	20460	82440	175												205
	4	3.175	4	14440	54960	159												140
	20	9.525	5	17490	68700	135	180	205	28	169	73	146	30	18	26	17.5	PT1/8"	173
	6	3.175	6	20460	82440	200												205

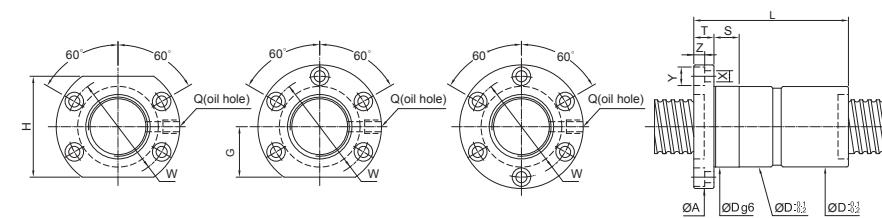


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/ μ m																																																																																																																																																																																																																																			
			Dynamic (1×10^6 REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z																																																																																																																																																																																																																																			
16	4	2.381	3	435	920	30	66	48.5	10	39	20	40	10	4.5	8	4.5 M6x1P	31																																																																																																																																																																																																																																	
	5	3.175	3	765	1240	30	80	49	10	39	20	40	10	4.5	8	4.5 M6x1P	35																																																																																																																																																																																																																																	
20	4	980	1650		89												47																																																																																																																																																																																																																																	
	5	3.175	3	860	1710	34	82	57	12	45	20	40	12	5.5	9.5	5.5 M6x1P	43																																																																																																																																																																																																																																	
25	4	1100	2280		92												56																																																																																																																																																																																																																																	
	6	3.969	3	1080	2050	34	93	57	12	45	20	40	12	5.5	9.5	5.5 M6x1P	43																																																																																																																																																																																																																																	
30	4	1380	2730		107												56																																																																																																																																																																																																																																	
	5	3.175	3	980	2300	40	82	63.5	12	51	22	44	15	5.5	9.5	5.5 M8x1P	51																																																																																																																																																																																																																																	
35	4	1250	3070		92												67																																																																																																																																																																																																																																	
	6	3.969	3	1275	2740	40	93	63.5	12	51	22	44	15	5.5	9.5	5.5 M8x1P	52																																																																																																																																																																																																																																	
40	4	1630	3650		107												56																																																																																																																																																																																																																																	
	5	3.175	3	1095	3060	40	129	68	15	55	26	52	15	6.6	11	6.5 M8x1P	51																																																																																																																																																																																																																																	
45	3	980	2300		118												51																																																																																																																																																																																																																																	
	4	4.762	1620	3205	42	140	68.5	15	55	26	52	15	6.6	11	6.5 M8x1P	53																																																																																																																																																																																																																																		
50	4	2070	4270		155												70																																																																																																																																																																																																																																	
	6	3.175	3	1095	3060	40	82										63																																																																																																																																																																																																																																	
55	4	1400	4080	48	92	73.5	12	60	30	60	15	6.6	11	6.5 M8x1P	82	6	1980	6120		118												122	60	3	1500	3750	93													65	4	3.969	4	1920	5000	48	109	73.5	12	60	30	60	15	6.6	11	6.5 M8x1P	86	65	6	2720	7500	133													125	8	4.762	3	1820	4230	50	117	83	16	66	32	64	15	6.6	11	6.5 M8x1P	66	70	4	2330	5640	135													86	10	6.35	3	2605	5310	54	139	88.5	16	70	34	68	15	9	14	8.5 M8x1P	67	75	4	3340	7080	160													89	12	6.35	3	2605	5310	54	153	88	16	70	34	68	15	9	14	8.5 M8x1P	67	80	5	4040	8850	203													110	8	4.762	4	2530	6630	55	138	88	16	72	34	68	15	9	14	8.5 M8x1P	95	85	10	6.35	3	2810	6210	58	138	98	18	77	36	72	20	11	17.5	11 M8x1P	75	4	3600	8280	159													98
	6	1980	6120		118												122																																																																																																																																																																																																																																	
60	3	1500	3750	93													65																																																																																																																																																																																																																																	
	4	3.969	4	1920	5000	48	109	73.5	12	60	30	60	15	6.6	11	6.5 M8x1P	86																																																																																																																																																																																																																																	
65	6	2720	7500	133													125																																																																																																																																																																																																																																	
	8	4.762	3	1820	4230	50	117	83	16	66	32	64	15	6.6	11	6.5 M8x1P	66																																																																																																																																																																																																																																	
70	4	2330	5640	135													86																																																																																																																																																																																																																																	
	10	6.35	3	2605	5310	54	139	88.5	16	70	34	68	15	9	14	8.5 M8x1P	67																																																																																																																																																																																																																																	
75	4	3340	7080	160													89																																																																																																																																																																																																																																	
	12	6.35	3	2605	5310	54	153	88	16	70	34	68	15	9	14	8.5 M8x1P	67																																																																																																																																																																																																																																	
80	5	4040	8850	203													110																																																																																																																																																																																																																																	
	8	4.762	4	2530	6630	55	138	88	16	72	34	68	15	9	14	8.5 M8x1P	95																																																																																																																																																																																																																																	
85	10	6.35	3	2810	6210	58	138	98	18	77	36	72	20	11	17.5	11 M8x1P	75																																																																																																																																																																																																																																	
	4	3600	8280	159													98																																																																																																																																																																																																																																	

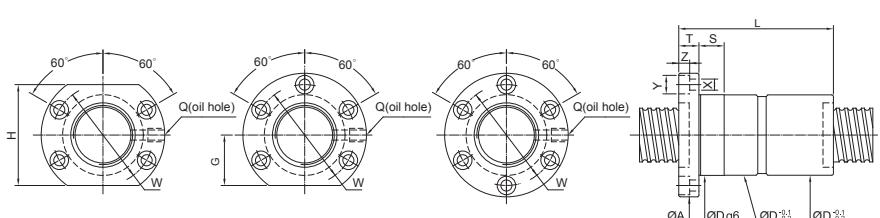


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS kgf/ μ m	
			Dynamic (1×10^6 REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	
40	4	1575	5290	96												100
	5	3.175	1910	6610	55	111	88.5	16	72	29	58	15	9	14	8.5 M8x1P	124
45	6	2230	7940	122												147
	3	1660	4810	97												77
50	6	3.969	2130	6410	55	113	88.5	16	72	34	68	15	9	14	8.5 M8x1P	103
	4	3020	9620	137												149
55	6	4.762	2120	5720	121											80
	4	3850	2720	7620	60	134	93	16	76	36	72	20	9	14	8.5 M8x1P	105
60	6	3.175	3010	7100	142											154
	5	4.762	3850	9470	64	162	106	18	84	43	86	20	11	17.5	11 M8x1P	107
65	5	4670	4670	11830	189											133
	3	3.969	3010	7100	154	63	106	18	84	43	86	20	11	17.5	11 M8x1P	82
70	5	7.144	4670	11830	204											133
	3	4010	4010	9250	160	70	110	18	85	45	90	20	11	17.5	11 M8x1P	86
75	4	5130	5130	12330	185											114
	8	4.762	2870	8620	64	136	92	16	75	36	72	15	9	14.5	9 M6x1P	109
80	3	4160	10750	70	158	110	16	90	45	90	20	11	17.5	11 PT1/8"	94	
	4	5330	14330	183												124
85	16	6.35	3220	8200	70	198	110	16	90	45	90	20	11	17.5	11 PT1/8"	90

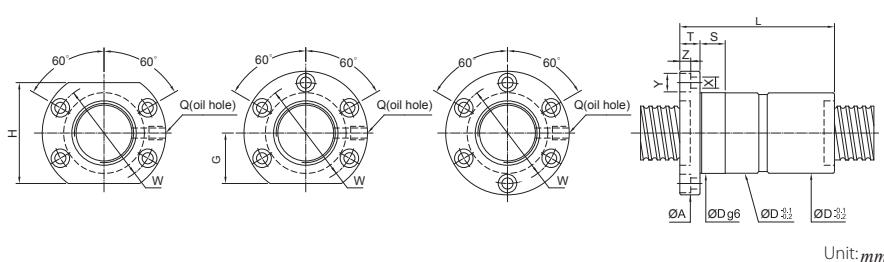


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT		OIL-HOLE	STIFFNESS kgf/ μ m			
			Dynamic (1×10^6 REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z		
50	5	4	1730	6760	96										119		
		5	2100	8450	66	111	98	16	82	36	72	20	9	14	8.5	PT1/8"	148
		6	2450	10140	122											174	
	6	4	2380	8250	111											123	
		5	2880	10310	66	122	98	16	82	36	72	20	9	14	8.5	PT1/8"	151
		6	3370	12380	142											181	
	8	4	3010	9610	136											125	
		5	3650	12010	70	157	113	18	90	42	84	20	11	17.5	11	PT1/8"	155
		6	4260	14420	174											185	
	10	3	3430	9300	143											99	
		4	4390	12400	74	162	114	18	92	42	84	20	11	17.5	11	PT1/8"	129
		5	5320	15500	189	171	121	22	97	47	94	20	14	20	13	PT1/8"	161
		6	6220	18600	205											191	
12	7.144	5	6680	20420	75	213	121	22	97	47	94	20	14	20	13	PT1/8"	166
		3	4510	11150	75	171	121	22	97	47	94	20	14	20	13	PT1/8"	101
	7.938	4	5770	14870	195											132	
		6.35	3	3430	9300	74	201	114	18	92	42	84	20	11	17.5	11	PT1/8"
20	7.938	3	4510	11150	78	253	121	28	97	47	94	20	14	20	13	PT1/8"	101
		6.35	3	3430	9300	74	201	114	18	92	42	84	20	11	17.5	11	PT1/8"

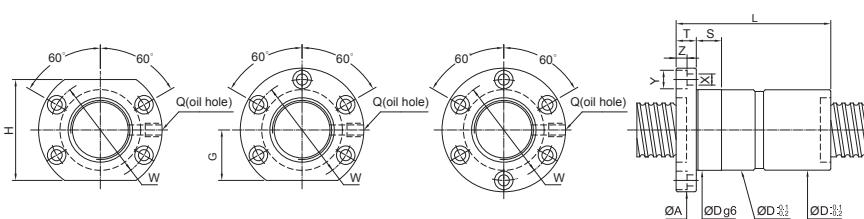


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT		OIL-HOLE	STIFFNESS kgf/ μ m			
			Dynamic (1×10^6 REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z		
63	6	4	2610	10550	80	120	122	18	100	45	90	20	11	17.5	11	PT1/8"	146
		5	3700	15830	144											217	
		6	3375	12200	82	141	124	18	102	46	92	20	11	17.5	11	PT1/8"	151
	8	4	4780	18300	178											222	
		5	5020	16450	85	166	132	22	107	48	96	20	14	20	13	PT1/8"	158
		6	7110	24680	209											232	
	10	4	6580	19430	90	195	136	22	112	52	104	20	14	20	13	PT1/8"	161
		5	9320	29150	248											236	
		6	8490	23610	95	255	153	28	123	59	118	20	18	26	17.5	PT1/8"	157
	12	4	10870	31480	296											207	
		5	5510	21200	166											190	
		6	6670	26500	105	185	151	22	127	57	114	20	14	20	13	PT1/8"	235
80	10	4	7810	31800	209											280	
		5	7500	25700	195	156	22	132	59	118	20	14	20	13	PT1/8"	196	
		6	10620	38550	248											288	
	3	9770	31700	254												193	
100	20	4	12510	42270	115	297	173	28	143	66	132	20	18	26	17.5	PT1/8"	254
		5	17720	63410	376											373	
		6	4760	20090	143											173	
	10	6.35	6090	26790	164	171	22	147	67	134	25	14	20	13	PT1/8"	228	
100	5	7380	33490	184												281	
	6	8630	40190	210												334	
	4	14440	54960	252												266	
	16	9.525	17490	68700	135	285	205	28	169	73	146	30	18	26	17.5	PT1/8"	329
20	5	20460	82440	318												391	
	6	14440	54960	299												266	
20	9.525	17490	68700	135	340	205	28	169	73	146	30	18	26	17.5	PT1/8"	329	
	6	20460	82440	381												391	

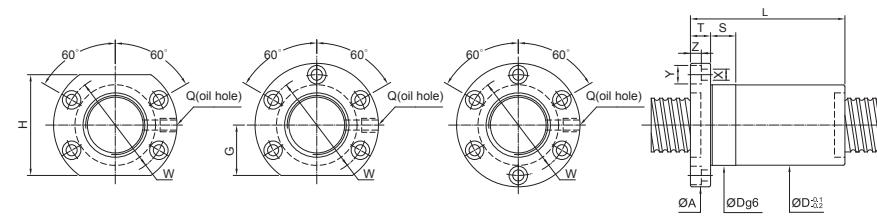

Unit:mm


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT			BOLT			OIL HOLE	STIFFNESS kgf/mm	
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q
20	5 3.175	2x(2) 3x(2)	610	1140	34	53	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	29	43
	860	1710	67															
	6 3.969	2x(2) 3x(2)	760	1370	34	61	57	12	45	20	40	12	5.5	9.5	5.5	M6×1P	29	
25	1080	2050	77															50
	2x(2)	350	960	44														30
	4 2.381	3x(2)	500	1440	40	56	63	12	51	22	44	15	5.5	9.5	5.5	M8×1P	46	
	4x(2)	640	1920	64														59
	2x(2)	690	1530	53														35
30	5 3.175	3x(2)	980	2300	40	67	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	51	
	4x(2)	1250	3070	76														67
	6 3.969	3x(2)	1275	2740	40	77	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	52	
	8 3.969	3x(2)	1275	2740	40	85	63.5	12	51	22	44	15	5.5	9.5	5.5	M8×1P	52	
	10 4.762	2x(2)	1140	2140	42	88	69	15	55	26	52	15	6.6	11	6.5	M8×1P	36	
35	1610	3x(2)	1610	3210	102													53
	6 3.175	3x(2)	1030	2630	43	69	68	12	55	26	52	15	6.6	11	6.5	M8×1P	56	
	10 3.175	2x(2)	730	1750	45	77	73	12	60	30	60	15	6.6	11	6.5	M8×1P	38	
	4 2.381	3x(2)	560	1840	43	56	68	12	55	26	52	15	6.6	11	6.5	M8×1P	55	
	5x(2)	870	3070	73														89
40	5 3.175	3x(2)	1095	3060	48	67	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	63	
	4x(2)	1400	4080	48	77													82
	6 3.969	3x(2)	1500	3750	48	77	73.5	12	60	30	60	15	6.6	11	6.5	M8×1P	65	
	4x(2)	1920	5000	48	90													86
	8 4.762	3x(2)	1820	4230	50	95	83	16	66	32	64	15	6.6	11	6.5	M8×1P	66	
45	2330	5640	112															86
	10 6.35	3x(2)	2605	5310	54	120	88	16	70	34	68	15	9	14	8.5	M8×1P	67	
	12 6.35	3x(2)	2605	5310	54	124	88	16	70	34	68	15	9	14	8.5	M8×1P	67	

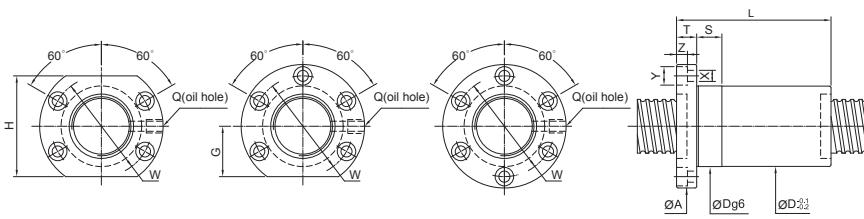



Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT			BOLT			OIL HOLE	STIFFNESS kgf/mm	
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q
40	5 3.175	3x(2)	1230	3970	65													75
	8 4.762	4x(2)	1575	5290	55	80	88.5	16	72	29	58	15	9	14	8.5	M8×1P	100	
	6 3.969	6x(2)	2230	7940	101													147
50	8 4.762	4x(2)	2130	6410	55	93	88.5	16	72	34	68	15	9	14	8.5	M8×1P	103	
	10 6.35	3x(2)	2720	7620	60	116	93	16	76	36	72	20	9	14	8.5	M8×1P	105	
	4x(2)	3010	7100	64	123													82
	12 6.35	3x(2)	3850	9470	64	143	106	18	84	43	86	20	11	17.5	11	PT1/8"	107	
	4x(2)	3850	9470	63	160	106	18	84	43	86	20	11	17.5	11	PT1/8"		107	
63	8 4.762	4x(2)	1350	5070	65													89
	10 6.35	3x(2)	1730	6760	66	80	98	16	82	36	72	20	9	14	8.5	PT1/8"	119	
	4x(2)	2450	10140	101														174
	6 3.969	6x(2)	2380	8250	66	93	88.5	16	72	34	68	15	9	14	8.5	PT1/8"	123	
	12 7.938	3x(2)	3370	12380	118													181
80	8 4.762	4x(2)	3010	9610	70	119	113	18	90	42	84	20	11	17.5	11	PT1/8"	125	
	10 6.35	3x(2)	3430	9300	74	123	116	18	92	42	84	20	11	17.5	11	M8×1P	99	
	4x(2)	4390	12400	143														129
	12 7.938	4x(2)	5530	16330	75	164	121	22	97	47	94	20	14	20	13	PT1/8"	135	
	4x(2)	5770	14870	164	147													101
80	6 3.969	4x(2)	2610	10550	80	96												146
	8 4.762	4x(2)	3700	15830	121	122	18	100	45	90	20	11	17.5	11	PT1/8"	217		
	10 6.35	4x(2)	3375	12200	82	119	124	18	102	46	92	20	11	17.5	11	PT1/8"	151	
	12 7.938	3x(2)	5140	14570	90	147	136	22	112	52	104	20	14	20	13	PT1/8"	122	
	20 9.525	2x(2)	5990	15740	95	156	153	28	123	59	118	20	18	26	17.5	PT1/8"	107	
80	10 6.35	2x(2)	3360	13390	105	95												118
	3x(2)	4760	20090	115	171													173
	16 9.525	2x(2)	11280	41220	115	175	205	28	169	73	146	30	18	26	17.5	PT1/8"	201	
80	20 9.525	3x(2)	7960	27480	115	159	205	28	169	73	146	30	18	26	17.5	PT1/8"	137	

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		KEYWAY		STIFFNESS	
				Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	K	W	H	kgf/μm
16	5	3.175	3	765	1240	30	40	20	3	1.8	18
20	5	3.175	3	860	1710	34	41	20	3	1.8	21
	4	3.175	4	1100	2280	48	48	25	4	2.5	28
25	6	3.969	3	1080	2050	34	46	20	4	2.5	22
	4	3.969	4	1380	2730	56	56	25	4	2.5	28
32	5	3.175	3	980	2300	40	41	20	4	2.5	26
	4	3.175	4	1250	3070	48	48	20	4	2.5	33
40	6	3.969	3	1275	2740	40	46	20	4	2.5	26
	4	3.969	4	1630	3650	56	56	25	4	2.5	34
50	5	3.175	3	1095	3060	41	20				31
	4	3.175	4	1400	4080	48	48	20	4	2.5	41
63	6	3.175	4	1980	6120	61	25				60
	5	3.969	3	1500	3750	46	20				32
80	6	3.969	4	1920	5000	50	56	25	5	3.0	43
	6	3.969	4	2720	7500	70	32				63
100	8	4.762	3	1820	4230	50	59	25	5	3.0	32
	4	4.762	4	2330	5640	70	70	25	5	3.0	43
100	10	6.35	3	2605	5310	54	68	25	6	3.5	33
	4	6.35	4	3340	7080	79	32	25	6	3.5	45
40	5	3.175	4	1575	5290	55	48	20	4	2.5	49
	6	3.175	4	2230	7940	61	61	25	4	2.5	73
40	6	3.969	4	2130	6410	55	56	25	5	3.0	51
	6	3.969	4	3020	9620	70	70	32	5	3.0	75
40	8	4.762	4	2720	7620	60	70	25	5	3.0	52
	6	4.762	4	3850	11430	91	91	40	5	3.0	77
40	10	6.35	3	3010	7100	65	68	25	6	3.5	41
	4	6.35	4	3850	9470	79	79	32	6	3.5	53

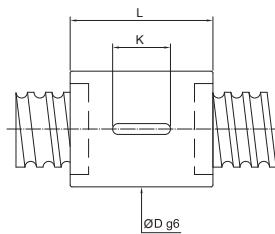


Unit:mm

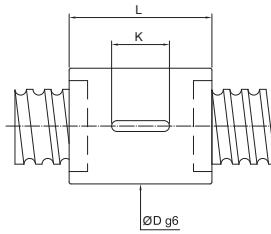


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		KEYWAY		STIFFNESS	
				O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	K	kgf/μm
50	5	3.175	4	1730	6750	66	48	20	4	2.5	60
50	6	3.175	4	2450	10130	66	61	25	4	2.5	86
	6	3.969	4	2380	8250	66	56	25	5	3.0	61
50	8	3.969	4	3370	12380	70	70	32	5	3.0	90
	6	4.762	4	3010	9610	70	70	91	5	3.0	63
63	10	6.35	3	4260	14420	75	82	20	4	2.5	92
	6	3.969	4	3430	9300	74	68	25	6	3.5	49
63	10	6.35	4	4390	12400	74	79	32	6	3.5	65
	6	3.969	4	6220	18600	74	102				95
63	12	7.938	3	4510	11150	75	82	20	4	2.5	50
	6	7.938	4	5770	14870	75	95	25	6	3.5	66
80	6	3.969	4	2610	10550	80	56	25	6	3.5	73
	6	3.969	4	3700	15830	80	70	32	6	3.5	107
80	8	4.762	4	3375	12200	82	70	32	6	3.5	76
	6	4.762	4	4780	18300	82	91	40	6	3.5	111
80	10	6.35	4	5020	16450	85	79	32	8	4.0	79
	6	6.35	4	7110	24680	85	85	40	8	4.0	116
80	12	7.938	4	6580	19430	90	95	40	8	4.0	80
	6	7.938	4	9320	29150	90	123	50	10	5.0	118
80	10	6.35	4	5510	21200	105	79	32	8	4.0	95
	6	6.35	4	7810	31800	105	102	40	8	4.0	140
100	12	7.938	4	7500	25700	110	95	40	8	4.0	98
	6	7.938	4	10620	38550	110	123	50	10	5.0	143
100	20	9.525	3	9770	31700	115	126	50	10	5.0	97
	4	9.525	4	12510	42270	115	149	63	10	5.0	127
100	10	6.35	3	4760	20090	125	72				91
	4	6.35	4	6090	26790	125	82	50	10	5.0	120
100	10	6.35	4	7380	33490	125	94	50	10	5.0	148
	6	6.35	4	8630	40190	125	104				176
100	16	9.525	4	14440	54960	135	128				140
	6	9.525	5	17490	68700	135	77	63	10	5	173
100	20	9.525	4	14440	54960	135	144	63	10	5	140
	6	9.525	5	17490	68700	135	164	187	10	5	205

SCREW SIZE	BALL DIA.		EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		KEYWAY			STIFFNESS kgf/ μ m
				Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	K	W	H	
16	5	3.175	3	765	1240	28	75	20	3	1.8	35
			4	980	1650		85				47
	5	3.175	3	860	1710	34	75	20	3	1.8	43
			4	1100	2280		85				56
20	6	3.969	3	1080	2050	34	87	20	4	2.5	43
			4	1380	2730		103	25			56
	5	3.175	3	980	2300	40	75	20	4	2.5	51
			4	1250	3070		85				67
25	6	3.969	3	1275	2740	40	87	20	4	2.5	52
			4	1630	3650		103	25			68
	5	3.175	3	1095	3060		75	20			63
			4	1400	4080	48	85	20	4	2.5	82
32	6	3.969	3	1500	3750		87	20			65
			4	1920	5000	50	103	25	5	3.0	86
	8	4.762	3	1820	4230	50	109	25	5	3.0	66
			4	2330	5640		127	32			86
40	10	6.35	3	2605	5310	54	135	25	6	3.5	67
			4	3340	7080		155	32			89
	5	3.175	4	1575	5290	55	85	20	4	2.5	100
			6	2230	7940		105	25			147
40	6	3.969	4	2130	6410	55	103	25	5	3.0	103
			6	3020	9620		127	32			149
	8	4.762	4	2720	7620	60	127	25	5	3.0	105
			6	3850	11430		161	40			154
40	10	6.35	3	3010	7100	65	135	25	6	3.5	82
			4	3850	9470		155	32			107

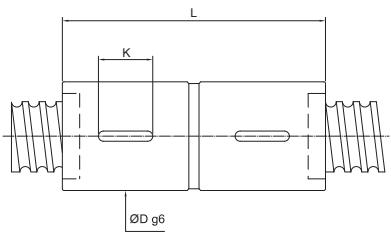

Unit:mm

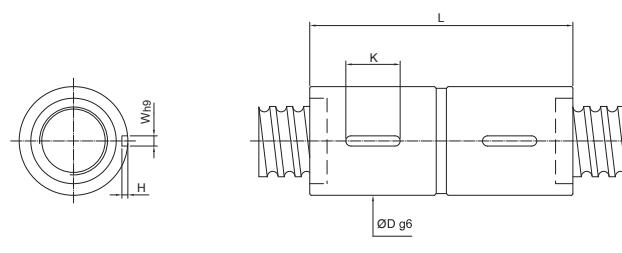

SCREW SIZE	BALL DIA.		EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		NUT		KEYWAY			STIFFNESS kgf/ μ m
				O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	K	
50	5	3.175	4	1730	6750	66	85	20	4	2.5	119
			6	2450	10130		105	25			174
	6	3.969	4	2380	8250	66	103	25	5	3.0	123
			6	3370	12380		127	32			181
63	8	4.762	4	3010	9610	70	127	32	5	3.0	125
			6	4260	14420		161				185
	10	6.35	3	3430	9300		135	32			99
			6	4390	12400	74	155	32	6	3.5	129
63	12	7.938	3	4510	11150	75	161	40	6	3.5	101
			4	5770	14870		185				132
	6	3.969	4	2610	10550	80	106	25	6	3.5	146
			6	3700	15830		130	32			217
63	8	4.762	4	3375	12200	82	131	32	6	3.5	151
			6	4780	18300		165	40			222
	10	6.35	4	5020	16450	85	160	32	8	4.0	158
			6	7110	24680		202	40			232
80	12	7.938	4	6580	19430	90	185	40	8	4.0	161
			6	9320	29150		238	50			236
	10	6.35	4	5510	21200	105	160	32	8	4.0	190
			6	7810	31800		202	40			280
100	12	7.938	4	7500	25700	110	185	40	8	4.0	196
			6	10620	38550		238	50			288
	20	9.525	3	9770	31700	115	245	50	10	5.0	193
			4	12510	42270		289	63			254
100	10	6.35	3	4760	20090		132				173
			4	6090	26790	125	164		50	10	228
	16	9.525	5	7380	33490		174				281
			6	8630	40190		204				334
100	16	9.525	4	14440	54960		240				266
			5	17490	68700	135	274	63	10	5	329
	20	9.525	6	20460	82440		306				391
			5	17490	68700	135	324	63	10	5	329
100	20	9.525	4	14440	54960		284				266
			5	17490	68700	135	324	63	10	5	329
	20	9.525	6	20460	82440		366				391

Features

It is important for a high-lead ballscrew to be with characteristics of high rigidity, low noise and thermal control.

Its characteristics are as follow:

High DN Value

Max. DN Value: 220,000

Low Noise

The average and accurate ball circle diameter (BCD) through whole threads make the ballscrews to obtain the stable and consistent drag torque as well as to reduce the noise.

The audio frequency is low and downy due to the designed of plastic circulation system.

Space Saving

The ballnut diameter reduces 20%~25% substantially and the length of nut is shorter.


The total space shall be reduced to approximately 50% consequently.

Circulation


The specially designed pathway of the Recirculation System makes a contact with lead angle and also with BCD in the same tangency, improving its smoothness effectively.

Applications

CNC Machinery / Precision Machinery / High Speed Machinery /
Semi-Conductor Equipment / Medical equipment


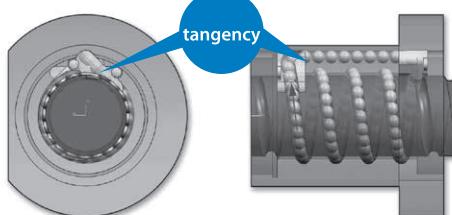


Note: The ball diameter above(include) 7.983mm of End Deflector is made from metal.

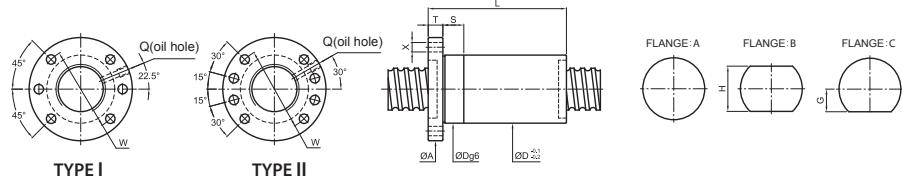

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE					FIT	OIL HOLE	BOLT	STIFFNESS	
O.D.	LEAD			Dynamic (1×10 ⁶ REV.)	Static Cam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/μm
12	4		3	610	1190		28										20
	5	2.381	3	610	1190	24	32	44	10	34	16	32	I	10	M6×1P	4.5	20
	10		3	590	1160		45										20
	20		2	390	770		54										14
14	4	2.381	3	680	1430	26	28	46	10	36	16	32	I	10	M6×1P	4.5	23
	5	3.175	3	820	1520	28	32	49	10	36	16	32	I	10	M6×1P	4.5	25
	5		3	850	1640		35										26
15	10	3.175	3	840	1610	29	47	51	10	39	19	38	I	10	M6×1P	5.5	26
	20		2	560	1050		58										18
	5		3	890	1760	29	35										27
16	10	3.175	3	870	1740	29	50	51	10	39	19	38	I	10	M6×1P	5.5	27
	16		2	600	1150	29	51										19
	4	2.381	3	780	2000	32	28	54	12	42	19	38	I	12	M6×1P	5.5	29
20	5		4	1300	3030		40										43
	10	3.175	3	990	2220	36	47	62	12	49	24	48	I	12	M6×1P	6.6	33
	20		2	670	1450		56										23
	6	3.969	3	1540	3310	37	38	62	12	49	23	46	I	12	M6×1P	6.6	34
25	8		3	1540	3300	45	45										34
	10	4.762	4	2560	5530	40	62	62	12	51	24	48	I	15	M6×1P	6.6	47
	4	2.381	3	870	2560	36	28	62	12	49	22	44	I	12	M6×1P	6.6	34
	5		4	1440	3840		41										50
30	10		3	1100	2810		50										38
	15	3.175	4	1410	3780	40	81	62	12	51	24	48	I	15	M6×1P	6.6	50
	20		2	750	1840		60										26
	25		2	730	1810		71										26
35	6		4	2250	5710		45										53
	12	3.969	4	2240	5660	43	70	64	12	51	24	48	I	15	M6×1P	6.6	53
	25		2	1160	2720		70										28
	8		4	2880	6890		55										55
40	10	4.762	4	2880	6870	45	63	65	15	54	25.5	51	I	15	M6×1P	6.6	55
	16		4	2830	6790	85	85										55
	20		2	1470	3180		61										29
	10	6.35	5	5050	11500	51	78	84	16	67	32	64	I	15	M6×1P	9	72



Note: Coam and Cam are the modified static and dynamic load capacities,calculated according to ISO-3408-5

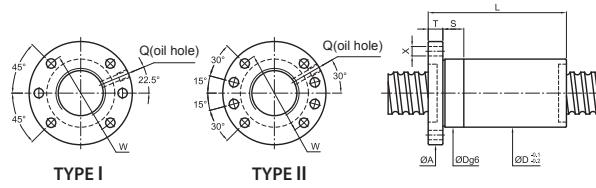

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS		
O.D.	LEAD			Dynamic (1x10 ⁶ REV.)	Static Coam	Dg6	L	A	T	W	G	H	Type	S	Q	X	kgf/μm
28	5	3.175	5	1850	5460	43	48	65	12	51	24	48	I	15	M8×1P	6.6	67
	6	3.969	5	2880	7980	46	52	66	12	54	26	52	I	15	M8×1P	6.6	70
	8		3	2350	5720		46										46
	10	4.762	3	2340	5710	48	52	74	12	60	30	60	I	15	M8×1P	6.6	46
	16		5	3680	9690		102										73
	10	6.35	5	5280	12530	54	78	87	16	72	34.5	69	I	15	M8×1P	9	77
	12		5	5270	12500	54	88										77
	5	3.175	4	1610	4970	50	41	87	16	72	34.5	69	I	15	M8×1P	9	61
	6		5	3050	9140		52										77
	10	3.969	4	2550	7500	53	62	87	16	72	34.5	69	I	15	M8×1P	9	63
32	32		2	1300	3540		90										40
	8	5		3900	10930		67										80
	10		5	3890	10910		77										80
	12	4.762	5	3890	10890	53	87	87	16	72	34.5	69	I	15	M8×1P	9	80
	15		5	3860	10850	116	116										80
	20		2	1700	4230		70										34
	32		2	1640	4120		90										34
	10		5	4900	13360		78										84
	12	5.556	5	4890	13340	55	88	87	16	72	34.5	69	I	15	M8×1P	9	84
	16		5	4860	13280	107											79
40	20		3	3140	8110		87										53
	10		5	5720	14490		78										85
	12	6.35	5	5710	14470	57	88	87	16	72	34.5	69	I	15	M8×1P	9	85
	16		4	4520	11100	92											69
	20		3	3530	8340		88										54


Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

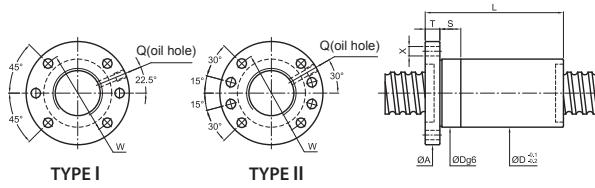

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS		
O.D.	LEAD			Dynamic (1x10 ⁶ REV.)	Static Coam	Dg6	L	A	T	W	G	H	Type	S	Q	X	kgf/μm
36	8	4.762	5	4170	12580	56	63	84	11	68	34	68	I	15	M8×1P	9	86
	10		5	6050	16460		78										93
	12		5	6080	16430		88										93
	16	6.35	5	6050	16360	61	109	91	18	76	34	68	II	15	M8×1P	9	93
	20		4	4910	12890		109										76
38	36		2	2570	6250		95										41
	10		5	6260	17740		80										97
	12	6.35	5	6260	17410	63	88	93	18	78	35	70	II	20	M8×1P	9	97
	16		5	6220	17350	109											97
40	40		3	3830	10220		142										71
	5	3.175	4	1760	6260	58	42	91	18	76	34	68	II	15	M8×1P	9	71
	6	3.969	5	3420	11810	58	52	91	18	76	34	68	II	15	M8×1P	9	92
	8	4.762	4	3610	11260	60	56	91	18	76	34	68	II	15	M8×1P	9	77
	10		5	6430	18440		78										101
	12		5	6420	18410		88	95	18	80	36	72	II	20	M8×1P	9	101
	15	6.35	5	6380	18350	65	103										101
44	16		5	6390	18330	108											101
	20		4	5190	14450		110	98	18	83	37	74	II	20	M8×1P	11	82
	40		2	2700	6950												43
	12	7.144	5	7530	20800	70	110	98	18	83	37	74	II	20	M8×1P	11	103
48	16		5	7500	20730												103


Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

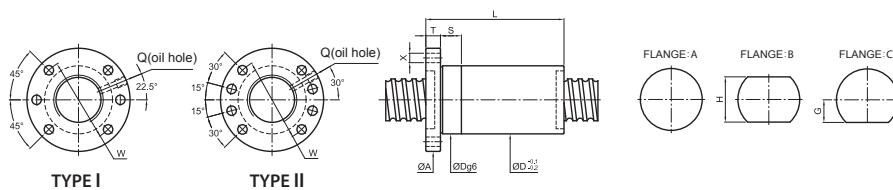

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)				NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Cam	Static Coam	Dg6	L	A	T	W	G	H	Type	S	Q	X	kgf/µm
45	8	4.762	4	3770	12580	66	55	98	18	83	37	74	II	20	M8×1P	11	84
	10	5	6910	21330		78											110
	12	6.35	5	6910	21310	70	89	105	18	88	40	80	II	20	M8×1P	11	110
	16	5	6880	21250		111											110
	12	7.144	5	7930	23300	73	88						II	20	M8×1P	11	113
50	20	4	6440	18340	110	105	18	88	40	80			II	20	M8×1P	11	91
	5	3.175	5	2360	9950	70	48	105	18	88	40	80	II	20	M8×1P	11	105
	8	4.762	5	4780	17550	70	64	105	18	88	40	80	II	20	M8×1P	11	109
	10	5	7160	23320		78											119
	12	6.35	5	7150	23300	75	90						II	20	M8×1P	11	119
55	16	5	7120	23250	109	118	18	100	46	92			II	20	M8×1P	11	119
	20	3	4460	13520		95											74
	20	7.938	4	7810	22680	80	114	121	18	104	50	100	II	25	M8×1P	11	101
	12	6.35	5	7340	25280	80	96	118	18	100	46	92	II	20	M8×1P	11	128
	10	6.35	5	7800	29210	88	84	135	22	115	50	110	II	20	M8×1P	11	141
63	16	9.525	5	13640	43620	102	116	147	20	127	56	112	II	25	M8×1P	14	167
	20	5	15350	56760		143											196
	25	9.525	4	12530	44860	118	146	165	25	145	65	130	II	25	M8×1P	14	159
	30	3	9610	32980		134											121


Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

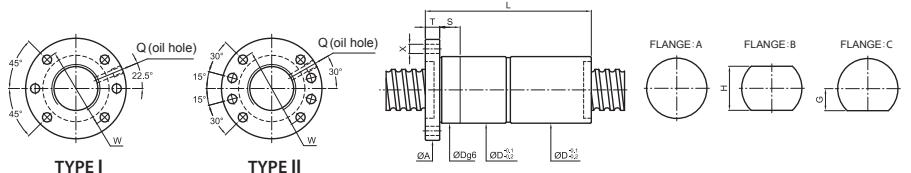

Unit:mm


SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)				NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Cam	Static Coam	Dg6	L	A	T	W	G	H	Type	S	Q	X	kgf/µm
20	4	2.381	3	780	2000	32	61	54	12	42	19	38	I	12	M6×1P	5.5	44
	5		4	1300	3030		80										65
	10	3.175	3	990	2220	36	97	62	12	49	24	48	I	12	M6×1P	6.6	50
	20		2	670	1450		116										33
	6	3.969	3	1540	3310	37	81						I	12	M6×1P	6.6	51
25	8		3	1540	3300	93	62	12	49	19	38		I	15	M6×1P	6.6	51
	10	4.762	4	2560	5530	40	107	62	12	51	24	48	I	15	M6×1P	6.6	70
	4	2.381	3	870	2560	36	60	62	12	49	19	38	I	12	M6×1P	6.6	53
	5		4	1440	3840		81										77
	10		3	1100	2810		100										58
30	15	3.175	4	1410	3780	40	166	62	12	51	24	48	I	15	M6×1P	6.6	77
	20		2	750	1840		120										39
	25		2	730	1810		146										39
	6		4	2250	5710		87										80
	12	3.969	4	2240	5660	43	142	64	12	51	22	44	I	15	M6×1P	6.6	80
40	25		2	1160	2720		145										41
	8		4	2880	6890		111										83
	10	4.762	4	2880	6870	45	128						I	15	M6×1P	6.6	83
	16		4	2830	6790	173	65	15	54	25.5	51		I	15	M6×1P	6.6	83
	20		2	1470	3180		122										42
50	10	6.35	5	5050	11500	51	153	84	16	67	32	64	I	15	M6×1P	9	108

Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

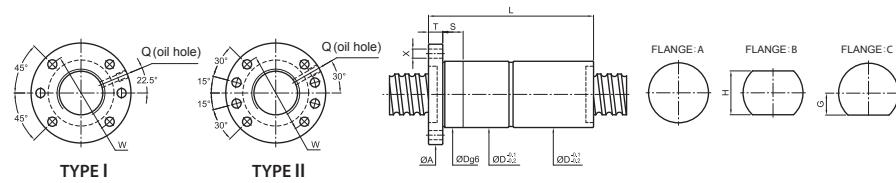


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Cam	Static Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X
28	5	3.175	5	1850	5460	43	93	65	12	51	24	48	I	M8×1P	6.6	104	
	6	3.969	5	2880	7980	46	106	66	12	50	26	52	I	M8×1P	6.6	108	
	8	3	2350	5720	94												69
	10	4.762	3	2340	5710	48	102	74	12	60	30	60	I	15	M8×1P	6.6	69
	16		5	3680	9690	206											112
	10	6.35	5	5280	12530	54	158	87	16	72	34.5	69	I	M8×1P	9	118	
	12	5	5270	12500	172												118
32	5	3.175	4	1610	4970	50	81	87	16	72	34.5	69	I	15	M8×1P	9	93
	6	3.969	5	3050	9140	106											120
	10	3.969	4	2550	7500	53	126	87	16	72	34.5	69	I	15	M8×1P	9	96
	32	2	1300	3540	172												60
	8	5	3900	10930	132												124
	10	5	3890	10910	147												124
	12	5	3890	10890	171	53	87	16	72	34.5	69	I	15	M8×1P	9	124	
36	15	4.762	5	3860	10850	221											124
	20	2	1700	4230	140												51
	32	2	1640	4120	186												51
	10	5	4900	13360	153												129
	12	5.556	5	4890	13340	55	172	87	16	72	34.5	69	I	15	M8×1P	9	129
	16	5	4860	13280	211												121
	20	3	3140	8110	177												79
40	10	5	5720	14490	153												131
	12	6.35	5	5710	14470	57	172	87	16	72	34.5	69	I	15	M8×1P	9	131
	16	4	4520	11100	180												105
	20	3	3530	8340	178												80

Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

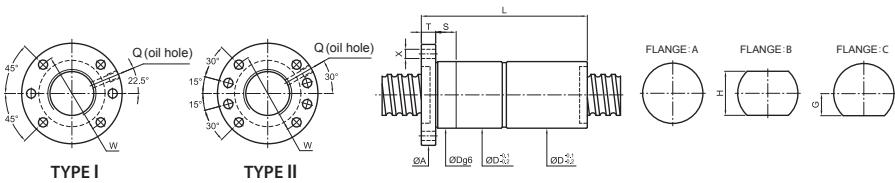

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Cam	Static Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X
36	8	4.762	5	4170	12580	56	127	84	11	68	34	68	II	15	M8×1P	9	133
	10		5	6050	16460		153										142
	12		5	6080	16430		172										142
	16	6.35	5	6050	16360	61	213	91	18	76	34	68	II	15	M8×1P	9	142
	20		4	4910	12890		217										115
	36		2	2570	6250		194										59
	10		5	6260	17740		155										149
38	12	6.35	5	6260	17410	63	172										149
	16		5	6220	17350	213	93	18	78	35	70	II	20	M8×1P	9	149	
	40		3	3830	10220		282										106
	5	3.175	4	1760	6260	60	87	91	18	76	34	68	II	15	M8×1P	9	111
40	6	3.969	5	3420	11810	60	108	91	18	76	34	68	II	15	M8×1P	9	142
	8	4.762	4	3610	11260	62	118	91	18	76	34	68	II	15	M8×1P	9	118
	10		5	6430	18440		158										155
	12		5	6420	18410		172										155
	15	6.35	5	6380	18350	68	226	95	18	80	36	72	II	20	M8×1P	9	155
	16		5	6390	18330		212										155
	20		4	5190	14450		220	98	18	83	37	74	II	20	M8×1P	11	125
40	40		2	2700	6950	210											64
	12	7.144	5	7530	20800	70	174	98	18	83	37	74	II	20	M8×1P	11	158
	16		5	7500	20730	212											158

Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

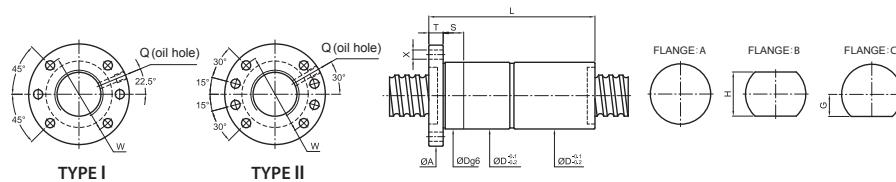

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS	MODIFIED LOAD CAPACITY (kgf)		NUT		FLANGE				FIT	OIL HOLE	BOLT	STIFFNESS		
O.D.	LEAD			Dynamic (1x10 ⁶ REV.)	Static Coam	Dg6	L	A	T	W	G	H	TYPE	S	Q	X	kgf/ μ m
45	8	4.762	4	3770	12580	66	114	98	18	83	37	74	II	20	M8×1P	11	130
	10		5	6910	21330		158										170
	12	6.35	5	6910	21310	70	171	105	18	88	40	80	II	20	M8×1P	11	170
	16		5	6880	21250		215										170
	12	7.144	5	7930	23300	73	178										173
50	20		4	6440	18340		220	105	18	88	40	80	II	20	M8×1P	11	139
	5	3.175	5	2360	9950	75	98	105	18	88	40	80	II	20	M8×1P	11	164
	8	4.762	5	4780	17550	75	128	105	18	88	40	80	II	20	M8×1P	11	169
	10		5	7160	23320		158										185
	12	6.35		7150	23300	75	174	118	18	100	46	92	II	20	M8×1P	11	185
55	16		5	7120	23250		215										185
	20		3	4460	13520	75	185	118	18	100							112
	20	7.938	4	7810	22680	80	225	121	18	104	46	92	II	20	M8×1P	11	154
	12	6.35	5	7340	25280	80	180	118	18	100	46	92	II	20	M8×1P	11	198
	10	6.35	5	7800	29210	88	164	135	22	115	50	100	II	20	M8×1P	14	220
63	16	9.525	5	13640	43620	102	228	147	20	127	56	112	II	25	M8×1P	14	257
	20		5	15350	56760		283										305
	25	9.525	4	12530	44860	118	296	165	25	145	65	130	II	25	M8×1P	14	245
	30		3	9610	32980		254										185

Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

Features

- Lower noise due to longer ball circulation paths.
- Offers smoother ball circulation.
- Offers better solution and quality for high lead or large diameter ballscrews.

Type

There are two types of Ballnut of the external circulation Ballscrews. They are "immersion type" of Fig.2 and "extrusive type" of Fig.3. The "immersion type" means the ball circulation tubes are inside the circular surface of Ballnut as shown on specifications of this catalogue are of "immersion type".

In some cases, as per designs on customer's drawings, there are smaller outer diameters ballnuts required. Then the ball circulation tubes shall extrude out of Ballnut circular surface.

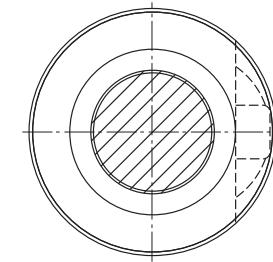


Fig.2 Immersion type





Fig.3 Extrusive type


FSWC

		SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS			
O.D.	LEAD				Dynamic (1x10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/ μ m
10	3	2.000	2.5x1	250	430		37											9
	4	2.000	2.5x1	250	430	26	40	46	10	36	14	28	10	4.5	8	4.5	M6x1P	9
	5	2.000	2.5x1	250	430		42											9
12	4	2.381	2.5x1	380	640	30	40	50	10	40	16	32	10	4.5	8	4.5	M6x1P	12
	5	2.381	2.5x1	380	640	42												12
14	4	2.381	2.5x1	410	750	34	40	57	11	45	17	34	10	5.5	9.5	5.5	M6x1P	14
	5	3.175	2.5x1	675	1145	42												15
15	4	2.381	2.5x1	420	800		40											14
	5	3.175	2.5x1	680	1210	34	42	57	10	45	17	34	10	5.5	9.5	5.5	M6x1P	15
	10	3.175	2.5x1	680	1210		55											16
16	4	2.381	1.5x2	490	1010		44											18
			2.5x1	430	850	34	41	57	11	45	17	34	10	5.5	9.5	5.5	M6x1P	15
			3.5x1	560	1180		42											21
	5	3.175	1.5x2	805	1525		45											19
			2.5x1	690	1270	40	41	63	11	51	21	42	15	5.5	9.5	5.5	M6x1P	16
			2.5x2	1250	2540	56												31
			3.5x1	920	1780		46											22
	6	3.175	1.5x2	805	1525		52											19
			2.5x1	690	1270	40	44	63	11	51	21	42	15	5.5	9.5	5.5	M6x1P	16
			3.5x1	920	1780		52											22
20	4	2.381	3.175	690	1270	40	56	63	11	51	21	42	15	5.5	9.5	5.5	M6x1P	16
			1.5x2	530	1270		44											21
			2.5x1	480	1060	40		63.5	11	51	21	42	15	5.5	9.5	5.5	M6x1P	18
			2.5x2	820	2120	50												35
	5	3.175	3.5x1	600	1480		43											25
			1.5x2	965	2070		45											24
			2.5x1	830	1730	44	42	67	11	55	26	52	10	5.5	9.5	5.5	M6x1P	20
			2.5x2	1510	3460	56												39
	6	3.969	3.5x1	1110	2420		46											26
			1.5x2	1285	2545		56											24
			2.5x1	1100	2120	48	49	71	11	59	27	54	15	5.5	9.5	5.5	M6x1P	20
	8	3.969	3.5x1	1470	2970		56											28
			1.5x2	1285	2545	48	54	75	13	61	27	54	15	6.6	11	6.5	M6x1P	24
			2.5x1	1100	2120	54												20
			3.5x1	1470	2970		62											28

Unit:mm

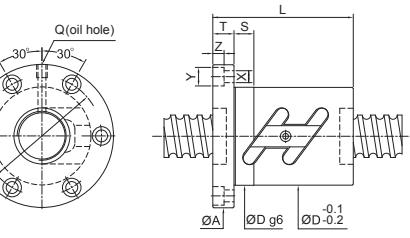

Unit:mm

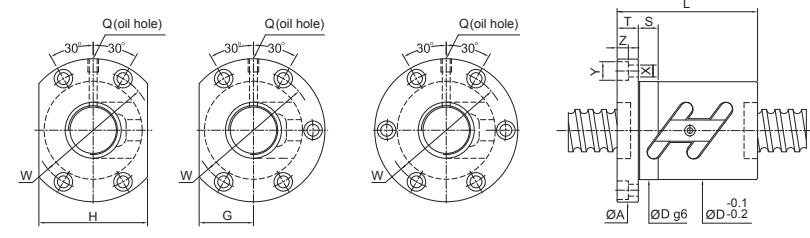

Unit:mm

FSWC


		SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS			
O.D.	LEAD				Dynamic (1x10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/ μ m
25	4	2.381	1.5x2	600	1630		44											26
			2.5x1	510	1355	46	40	69	11	57	26	52	15	5.5	9.5	5.5	M6x1P	22
			2.5x2	930	2710	49												42
			3.5x1	680	1900		42											30
25	5	3.175	1.5x2	1065	2575		45											28
			2.5x1	910	2150	50	41	73	11	61	28	56	15	5.5	9.5	5.5	M6x1P	24
			2.5x2	1650	4300	56												46
			3.5x1	1210	3010		46											33
28	6	3.969	1.5x2	1420	3215		56											29
			2.5x1	1210	2680	53	49	76	11	64	29	58	15	5.5	9.5	5.5	M6x1P	24
			2.5x2	2190	5360	62												47
			3.5x1	1610	3750		56											34
28	8	4.762	1.5x2	1820	3840		61											30
			2.5x1	1560	3200	58	61	85	13	71	32	64	15	6.6	11	6.5	M6x1P	25
			3.5x1	2080	4480	66												35
			1.5x2	1820	3840		71											30
10	10	4.762	2.5x1	1560	3200	58	65	85	15	71	32	64	15	6.6	11	6.5	M6x1P	25
			3.5x1	2080	4480	75												35
			1.5x2	1935	4325		65											33
10	8	4.762	2.5x1	1650	3600	60	63	93	15	76	36	72	15	9	14	8.5	M8x1P	28
			3.5x1	2200	5040	68												38
10	8	4.762	1.5x2	1935	4325		74											33
			2.5x1	1650	3600	60	67	93	15	76	36	72	15	9	14	8.5	M8x1P	28
8	8	3.969	3.5x1	2200	5040	77												38

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS				
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm	
32	4	2.381	2.5x1 2.5x2	565 1020	1750 3500	54 50	40		81	12	67	32	64	15	6.6	11	6.5	M6x1P	26 50
		5.3175	1.5x2 2.5x1 2.5x2 3.5x1	1180 1010 1830 2590 1350	3410 2840 5680 8520 3980	47 43 58 72 47												34 29 56 82 40	
		6.3.969	1.5x2 2.5x1 2.5x2 3.5x1	1560 1330 2410 1770	4135 3450 6900 4830	57 45 62 57												35 29 57 40	
	8	4.762	1.5x2 2.5x1 2.5x2 3.5x1	2010 1720 3120 2300	5010 4180 8360 5850	64 63 66 68			98	15	82	38	76	15	9	14	8.5	M8x1P	36 30 59 42
		10.6.35	1.5x2 2.5x1 2.5x2 3.5x1	3000 2570 4660 3430	6530 5440 10880 7620	78 68 74 78												38 32 61 44	
		12.6.35	1.5x2 2.5x1 2.5x2 3.5x1	3000 2570 4660 3430	6530 5440 10880 7620	88 77 110 91												38 32 62 44	
36	5	3.175	1.5x2 2.5x2 2.5x3 3.5x1	1240 1920 2720 1410	3850 6420 9630 4490	50 60 65 50												38 62 90 44	
		6.3.969	2.5x2 2.5x3	2600 3680	7900 11850	66 84			98	15	82	38	76	15	9	14	8.5	M8x1P	63 93
		10.6.35	1.5x2 2.5x1 2.5x2 3.5x1	3180 2720 4930 3630	7410 6180 12360 8650	81 71 103 81												41 35 68 48	
		12.6.35	2.5x1 2.5x2 3.5x1	2720 4930 3630	6180 12360 8650	77 110 91												35 68 48	


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS			
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm
40	5	3.175	1.5x2 2.5x1 2.5x2 3.5x1	1280 1090 1980 1450	4275 3560 7120 4980	50 48 67												41 34 66 98 47
		6.3.969	1.5x2 2.5x1 2.5x2 2.5x3 3.5x1	1750 1500 2720 3850 2000	5300 4420 8840 13260 6190	60 53 66 84 60											42 35 69 101 49	
		8.4.762	1.5x2 2.5x1 2.5x2 3.5x1	2220 1900 3450 2540	6320 5270 10540 7380	64 63 74 83											43 36 70 50	
	10	6.3.5	1.5x2 2.5x1 2.5x2 3.5x1	3370 2880 5220 3840	8335 6950 13900 9730	81 71 103 81											45 35 74 52	
		12.6.35	2.5x1 2.5x2 3.5x1	2880 6950 5220 3840	6950 8950 17900 26850	77 84 90 148											38 52 74 121	
		10.6.35	2.5x2 2.5x3	5480 7760	15700 23550	101 131											81 119	
	12	7.144	2.5x1 2.5x2 2.5x3	3550 6440 9120	8950 17900 26850	84 20 11											43 82 121	
		10.6.35	2.5x2 2.5x3	5480 7760	15700 23550	101 131											81 119	
		12.6.35	2.5x1 2.5x2 3.5x1	2720 4930 3630	6180 12360 8650	77 110 91											35 68 48	

FSWC

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT	FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS							
			O.D.	LEAD		Dynmic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q
50	5 3.175	1.5×2	1410	5305	50														49
		1.5×3	2000	7960	80	60	114	15	96	43	86	15	9	14	8.5	PT1/8"		72	
		2.5×2	2190	8840	60	60												80	
		3.5×1	1610	6190	50													57	
	6 3.969	1.5×2	1920	6600	60													50	
		2.5×2	2980	11000	84	67	118	15	100	45	90	15	9	14	8.5	PT1/8"		82	
		2.5×3	4220	16500	85	85												121	
		3.5×1	2190	7700	60													58	
	8 4.762	1.5×2	2515	7810	68													52	
		2.5×2	3900	13020	87	86	128	18	107	49	98	20	11	17.5	11	PT1/8"		85	
		2.5×3	5520	19530	109	109												125	
		3.5×1	2870	9110	71													60	
	10 6.35	1.5×2	3725	10450	81													54	
		2.5×1	3190	8710	71													45	
		2.5×2	5790	17420	93	101	135	18	113	51	102	20	11	17.5	11	PT1/8"		88	
		2.5×3	8200	26130	131													130	
	12 7.144	3.5×1	4260	12190	81													63	
		2.5×1	3700	10050	100	88	146	22	122	55	110	20	14	20	13	PT1/8"		46	
		2.5×2	6710	20100	116													89	
55	10 6.35	2.5×2	6005	19540	102	101	144	18	122	54	108	20	11	17.5	11	PT1/8"		95	
		2.5×3	8510	29310	131													140	
63	10 6.35	2.5×1	3510	11200	75													55	
		2.5×2	6370	22400	108	105	154	22	130	58	116	20	14	20	13	PT1/8"		106	
		2.5×3	9020	33600	135													156	
	12 7.938	2.5×1	4770	13780	88													59	
		2.5×2	8650	27560	115	124	161	22	137	61	122	20	14	20	13	PT1/8"		113	
		2.5×3	12250	41340	160													167	
80	10 6.35	2.5×2	7130	28500	130	105	176	22	152	66	132	20	14	20	13	PT1/8"		129	
		2.5×3	10100	42750	134													190	
	12 7.938	2.5×2	9710	35560	136	124	182	22	158	68	136	20	14	20	13	PT1/8"		137	
		2.5×3	13760	53340	160													202	
	16 9.525	2.5×2	16450	59280	143	160	204	28	172	77	154	30	18	26	17.5	PT1/8"		170	
		2.5×3	23300	88920	208													250	

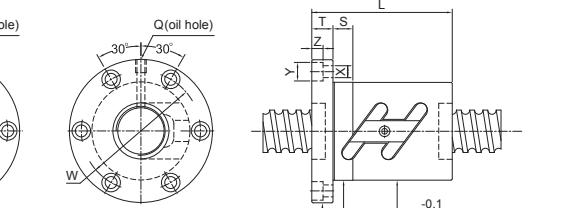


Unit: mm

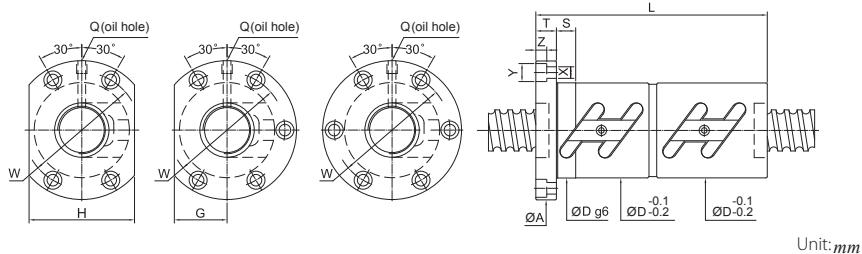

Unit: mm


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT	FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS							
			O.D.	LEAD		Dynmic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q
16	4 2.381	1.5×2	490	1010	81														36
		2.5×1	430	850	34	70	57	11	45	17	34	15	5.5	9.5	5.5	M6×1P		30	
		3.5×1	560	1180	78													42	
	5 3.175	1.5×2	805	1525	90													39	
		2.5×1	690	1270	40	77	63	11	51	20	40	15	5.5	9.5	5.5	M6×1P		33	
		2.5×2	1250	2540	105													63	
20	6 3.175	3.5×1	920	1780	88													45	
		1.5×2	805	1525	90													39	
		2.5×1	690	1270	40	80	63	11	51	20	40	15	5.5	9.5	5.5	M6×1P		33	
	4 2.381	3.5×1	920	1780	90													45	
		1.5×2	530	1270	83													42	
		2.5×1	480	1060	40	67	63	11	51	24	48	15	5.5	9.5	5.5	M6×1P		36	
20	5 3.175	2.5×2	820	2120	89													69	
		3.5×1	600	1480	75													49	
		1.5×2	965	2070	99													47	
	8 3.969	2.5×1	830	1730	44	76	67	11	55	26	52	15	5.5	9.5	5.5	M6×1P		40	
		2.5×2	1510	3460	105													77	
		3.5×1	1110	2420	80													55	
20	6 3.175	1.5×2	1285	2545	98													49	
		2.5×1	1100	2120	48	82	71	11	59	27	54	15	5.5	9.5	5.5	M6×1P		41	
		3.5×1	1470	2970	93													45	
	8 3.969	1.5×2	1285	2545	108													49	
		2.5×2	1100	2120	48	102	75	13	61	28	56	15	6.6	11	6.5	M6×1P		41	
		3.5×1	1470	2970	110													56	

FDWC

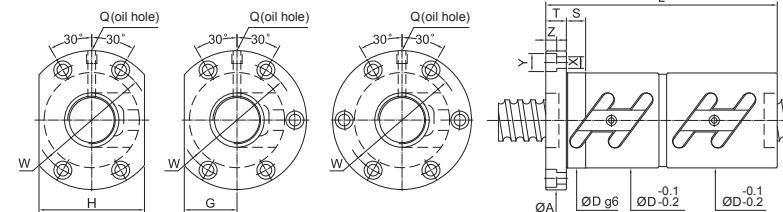FDWC

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE				FIT	BOLT	OIL HOLE	STIFFNESS		
O.D.	LEAD			Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/ μ m
25	4 2.381	1.5×2	600	1630	83											51	
		2.5×1	510	1355	46	67	69	11	57	26	52	15	5.5	9.5	5.5	M6×1P	43
		2.5×2	930	2710		91										84	
		3.5×1	680	1900		75										59	
	5 3.175	1.5×2	1065	2575	80											57	
		2.5×1	910	2150	50	77	73	11	61	28	56	15	5.5	9.5	5.5	M6×1P	48
		2.5×2	1650	4300		105										92	
		3.5×1	1210	3010		86										65	
	6 3.969	1.5×2	1420	3215	91											58	
		2.5×1	1210	2680	82	76	11	64	29	58	15	5.5	9.5	5.5	M6×1P	49	
		2.5×2	2190	5360	53	116										94	
		3.5×1	1610	3750		93										67	
	8 4.762	1.5×2	1820	3840	111											60	
		2.5×1	1560	3200	58	95	85	13	71	32	64	15	6.6	11	6.5	M6×1P	50
		3.5×1	2080	4480		111										69	
		1.5×2	1820	3840	134											60	
	10 4.762	2.5×1	1560	3200	58	117	85	15	71	32	64	15	6.6	11	6.5	M6×1P	50
		3.5×1	2080	4480		138										69	
		1.5×2	1110	2960	86											62	
		2.5×1	950	2470	55	78	83	12	69	31	62	15	6.6	11	6.5	M8×1P	52
		2.5×2	1720	4940		106										101	
		3.5×1	1270	3460		86										72	
	28	1.5×2	1480	3605	98											63	
		2.5×1	1270	3000	55	89	83	12	69	31	62	15	6.6	11	6.5	M8×1P	53
		2.5×2	2300	6000		117										103	
		3.5×1	1690	4200		94										73	
	8 4.762	1.5×2	1935	4325	113											66	
		2.5×1	1650	3600	60	97	93	15	76	36	72	15	9	14	8.5	M8×1P	55
		3.5×1	2200	5040		113										76	
		1.5×2	1935	4325	134											66	
	10 4.762	2.5×1	1635	3600	60	117	93	15	76	36	72	15	9	14	8.5	M8×1P	55
		3.5×1	2200	5040		138										76	

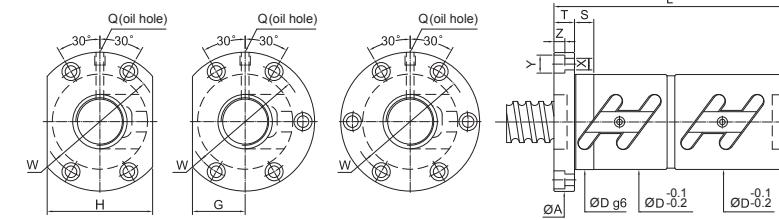


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE				FIT	BOLT	OIL HOLE	STIFFNESS			
O.D.	LEAD			Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/ μ m	
32	4 2.381	1.5×2	2.5×1	565	1750	54	68	81	12	67	32	64	15	6.6	11	6.5	M6×1P	52
		2.5×1	2.5×2	1020	3500	90	90										101	
		1.5×2	2.5×1	1180	3410		82										69	
		2.5×1	2.5×2	1010	2840		78										58	
	5 3.175	2.5×2	2.5×3	1830	5680	58	105	85	12	71	32	64	15	6.6	11	6.5	M8×1P	112
		2.5×3	3.5×1	2590	8520		136										164	
		3.5×1	1.5×2	1350	3980		82										80	
		1.5×2	2.5×1	1560	4135		100										70	
	6 3.969	2.5×1	2.5×2	1330	3450	62	87	88	12	75	34	68	15	6.6	11	6.5	M8×1P	59
		2.5×2	3.5×1	2410	6900		123										114	
		3.5×1	1.5×2	1770	4830		100										81	
		1.5×2	2.5×1	2010	5010		113										76	
	8 4.762	2.5×1	2.5×2	1720	4180	66	106	98	15	82	38	76	15	9	14	8.5	M8×1P	64
		2.5×2	3.5×1	3120	8360		152	137	15	82	38	76	15	9	14	8.5	123	
		3.5×1	1.5×2	2300	5850		113										88	
		1.5×2	2.5×1	3000	6530		138										76	
	10 6.35	2.5×1	2.5×2	2570	5440	74	118	108	15	90	41	82	15	9	14	8.5	M8×1P	64
		2.5×2	3.5×1	4660	10880		177										123	
		3.5×1	1.5×2	3430	7620		148										88	
		1.5×2	2.5×1	3000	6530		160										76	
	12 6.35	2.5×1	2.5×2	2570	5440	74	137	108	18	90	41	82	15	9	14	8.5	M8×1P	64
		2.5×2	3.5×1	4660	10880		208	208	18	90	41	82	15	9	14	8.5	124	
		3.5×1	1.5×2	3430	7620		160										88	
		1.5×2	2.5×1	1240	3850		91										75	
	36	2.5×2	2.5×3	1920	6420	65	110	98	15	82	38	76	15	9	14	8.5	M8×1P	123
		2.5×3	3.5×1	2720	9630		139										181	
		3.5×1	1.5×2	1410	4490		90										87	
		1.5×2	2.5×1	2600	7900	65	123	98	15	82	38	76	15	9	14	8.5	M8×1P	126
	8 4.762	2.5×2	2.5×3	3680	11850		159	139	15	98	45	90	15	11	17.5	11	M8×1P	187
		2.5×3	3.5×1	3265	9450	70	153	114	18	92	46	92	20	11	17.5	11	M8×1P	129
		3.5×1	1.5×2	3180	7410		141										83	
		1.5×2	2.5×1	2720	6180	75	131	118	18	98	45	90	15	11	17.5	11	M8×1P	70
	10 6.35	2.5×2	2.5×3	4930	12360	75	180	126	130	108	90	75	20	11	17.5	11	M8×1P	136
		2.5×3	3.5×1	3630	8650		151										96	
		3.5×1	1.5×2	2720	6180		137										70	
		1.5×2	2.5×1	4930	12360	75	208	118	18	98	45	90	15	11	17.5	11	M8×1P	136
	12 6.35	2.5×2	2.5×3	3630	8650	161	161										97	


FDWC

FDWC

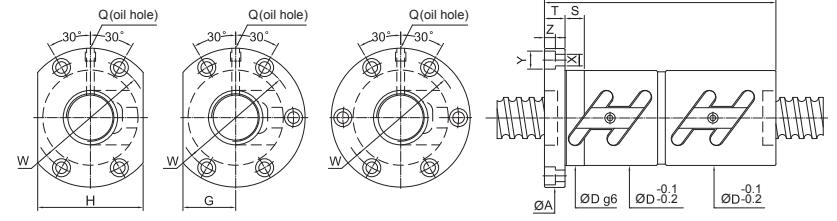

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm
40	5 3.175	1.5×2	1280	4275	88													82
		2.5×1	1090	3560	84													69
		2.5×2	1980	7120	67	108	101	15	83	39	78	15	9	14	8.5	M8×1P	133	
		2.5×3	2800	10680	139													196
		3.5×1	1450	4980	88													95
	6 3.969	1.5×2	1750	5300	103													85
		2.5×1	1500	4420	90													71
		2.5×2	2720	8840	70	123	104	15	86	40	80	15	9	14	8.5	PT1/8"	138	
		2.5×3	3850	13260	159													202
		3.5×1	2000	6190	103													98
45	8 4.762	1.5×2	2220	6320	124													86
		2.5×1	1900	5270	74	108	15	90	41	82	15	9	14	8.5	PT1/8"		73	
		2.5×2	3450	10540	152	108	15	90	41	82	15	9	14	8.5	PT1/8"		141	
		3.5×1	2540	7380	125													100
	10 6.35	1.5×2	3370	8335	141													91
		2.5×1	2880	6950	82	131	124	18	102	47	94	20	11	17.5	11	PT1/8"		71
		2.5×2	5220	13900	180													148
		3.5×1	3840	9730	151													105
	12 6.35	2.5×1	2880	6950	137													76
		2.5×2	5220	13900	86	208	128	18	106	48	96	20	11	17.5	11	PT1/8"		148
		3.5×1	3840	9730	161													105
45	6 3.969	2.5×2	2850	9870	80	123	114	15	96	48	96	15	9	14	8.5	PT1/8"	151	
		2.5×3	4035	14800	159												222	
	8 4.762	2.5×2	3650	11780	85	158	127	18	105	52	104	20	11	17.5	11	PT1/8"	155	
		2.5×3	5175	17670	206												228	
	10 6.35	2.5×2	5480	15700	88	180	132	18	110	50	100	20	11	17.5	11	PT1/8"	163	
		2.5×3	7760	23550	243												239	
	12 7.144	2.5×1	3550	8950	90	140	132	18	110	50	100	20	11	17.5	11	PT1/8"	85	
		2.5×2	6440	17900	210												165	


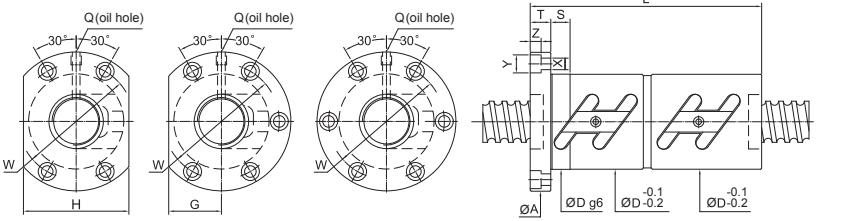


Unit:mm



SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS			
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm
50	5 3.175	1.5×2	1410	5305	80	108												98
		1.5×3	2000	7960	114	128												144
		2.5×2	2190	8840	123	113												159
		3.5×1	1610	6190	108													114
	6 3.969	1.5×2	1920	6600	84	111												101
		2.5×2	2980	11000	123	118	15	100	45	90	15	9	14	8.5	PT1/8"		164	
		2.5×3	4220	16500	159													242
		3.5×1	2190	7700	107													117
55	8 4.762	1.5×2	2515	7810	87	127												104
		2.5×2	3900	13020	156	128	18	107	49	98	20	11	17.5	11	PT1/8"		170	
		2.5×3	5520	19530	208													250
		3.5×1	2870	9110	127													121
	10 6.35	1.5×2	3725	10450	100	151												108
		2.5×1	3190	8710	132													91
		2.5×2	5790	17420	18	180	135	18	113	51	102	20	11	17.5	11	PT1/8"		177
		2.5×3	8200	26130	243													261
63	12 7.144	2.5×1	3700	10050	100	140												126
		2.5×2	6710	20100	210	146	18	122	55	110	20	14	20	13	PT1/8"		92	
		2.5×3	8650	27560	214													179
		2.5×1	4760	13820	115	144												112
	16 9.525	2.5×2	8050	23100	122	200												218
		2.5×1	14600	46200	296	178	28	150	69	138	20	18	26	17.5	PT1/8"		144	
		2.5×2	7130	28500	130	189												280
		2.5×3	10100	42750	249	176	22	152	66	132	20	14	20	13	PT1/8"		258	
80	10 6.35	2.5×2	9710	35560	136	220												380
		2.5×3	13760	53340	292	182	22	158	68	136	20	14	20	13	PT1/8"		391	
		2.5×2	16450	59280	143	290												339
	16 9.525	2.5×3	23300	88920	386	204	28	172	77	154	30	18	26	17.5	PT1/8"		500	

FDWC

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE	OIL HOLE	STIFFNESS	kgf/ μm	
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V		
14	4	2.381	2.5x1	410	750	25	40	45	10	35	10	5.5	9.5	5.5	19	21	M6x1P	14
	5	3.175	2.5x1	675	1145	25	42	45	10	35	10	5.5	9.5	5.5	19	21	M6x1P	15
15	4	2.381	2.5x1	420	800	28.5	40	48	10	38	10	5.5	9.5	5.5	17	22	M6x1P	14
	5	3.175	2.5x1	680	1210	28.5	42	48	10	38	10	5.5	9.5	5.5	17	22	M6x1P	15
16	5	3.175	1.5x2	805	1525	50												19
			2.5x1	690	1270	45	54	12	41	15	5.5	9.5	5.5	20	23	M6x1P		16
			2.5x2	1250	2540	60												31
			3.5x1	920	1780	50												22
20	5	3.175	1.5x2	965	2070	50												24
			2.5x1	830	1730	45	58	12	46	15	5.5	9.5	5.5	22	27	M6x1P		20
			2.5x2	1510	3460	60												39
			3.5x1	1110	2420	50												26
			1.5x2	1285	2545	66												24
25	6	3.969	2.5x1	1100	2120	36	48	60	12	47	15	5.5	9.5	5.5	23	28	M6x1P	20
			3.5x1	1470	2970	66												28
			1.5x2	1420	3215	65												29
28	6	3.969	2.5x1	1210	2680	42	68	12	55	15	5.5	9.5	5.5	28	33	M6x1P		24
			2.5x2	2190	5360	68												47
			3.5x1	1610	3750	65												34
			1.5x2	1820	3840	75												30
28	10	4.762	2.5x1	1560	3200	45	65	72	16	58	15	6.6	11	6.5	29	35	M6x1P	25
			3.5x1	2080	4480	75												35
			1.5x2	1110	2960	50												31
			2.5x1	950	2470	44	45	70	12	56	15	6.6	11	6.5	28	35	M6x1P	26
			2.5x2	1720	4940	60												50
28	6	3.969	3.5x1	1270	3460	50												36
			1.5x2	1480	3605	55												32
			2.5x1	1270	3000	44	50	70	12	56	15	6.6	11	6.5	28	36	M6x1P	26
			2.5x2	2300	6000	68												51
			3.5x1	1690	4200	55												37





Unit:mm





Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE	OIL HOLE	STIFFNESS	kgf/ μm	
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	
32	6	3.969	1.5x2	1180	3410													34
			2.5x1	1010	2840													29
			2.5x2	1830	5680	50	60	76	12	63	15	6.6	11	6.5	30	39	M6x1P	56
			2.5x3	2590	8520													82
			3.5x1	1350	3980													40
36	10	6.35	1.5x2	1560	4135													35
			2.5x1	1330	3450	52	50	78	12	65	15	6.6	11	6.5	32	40	M6x1P	57
			2.5x2	2410	6900													40
			3.5x1	1770	4830													36
36	10	6.35	1.5x2	2010	5010													30
			2.5x1	1720	4180	54	62	88	16	70	15	9	14	8.5	33	42	M6x1P	59
			2.5x2	3120	8360													42
			3.5x1	2300	5850													38
36	10	6.35	1.5x2	3000	6530													32
			2.5x1	2570	5440	57	68	91	16	73	15	9	14	8.5	37	45	M8x1P	61
			2.5x2	4660	10880													44
			3.5x1	3430	7620													33
36	6	3.969	2.5x1	1430	3950	55	50	82	12	68	15	6.6	11	6.5	32	45	M6x1P	63
			2.5x2	2600	7900	68	68											48
			1.5x2	3180	7410													41
			2.5x1	2720	6180	62	72	104	18	82	20	11	17.5	11	40	49	M6x1P	68
			2.5x2	4930	12360													35
			3.5x1	3630	8650													48

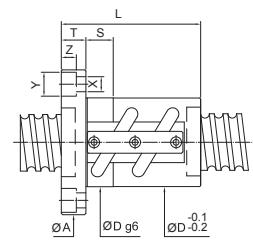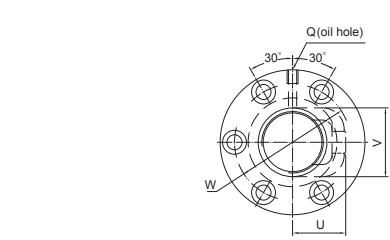

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT	FLANGE		FIT	BOLT	RETURN TUBE	OIL HOLE	STIFFNESS					
			O.D.	LEAD		Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	kgf/μm
40	5 3.175	1.5x2	1280	4270	55												41
		2.5x1	1090	3560	50												34
		2.5x2	1980	7120	58	65	92	16	72	15	9	14	8.5	34	47	M8×1P	66
		2.5x3	2800	10680	80												98
		3.5x1	1450	4980	55												47
	6 3.969	1.5x2	1750	5300	60												42
		2.5x1	1500	4420	54												35
		2.5x2	2720	8840	60	72	94	16	76	15	9	14	8.5	36	48	PT1/8"	69
	8 4.762	2.5x3	3850	13260	90												101
		3.5x1	2000	6190	60												49
45	10 6.35	1.5x2	2220	6320	70												43
		2.5x1	1900	5270	62	62	96	16	78	15	9	14	8.5	38	50	PT1/8"	36
		2.5x2	3450	10540	86												70
		3.5x1	2540	7380	70												50
	12 7.144	1.5x2	3370	8335	82												45
		2.5x1	2880	6950	72	65	106	18	85	20	11	17.5	11	42	52	PT1/8"	35
		2.5x2	5220	13900	102												74
	10 6.35	3.5x1	3840	9730	82												52
		2.5x1	3020	7850	74	70	112	18	90	20	11	17.5	11	48	58	PT1/8"	42
		2.5x2	5480	15700	104												81
45	12 7.938	2.5x1	3550	8950	87	74	122	18	97	20	14	20	13	49	60	PT1/8"	43
		2.5x2	6440	17900	123												82







Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT	FLANGE		FIT	BOLT	RETURN TUBE	OIL HOLE	STIFFNESS							
			O.D.	LEAD		Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q
50	5 3.175	1.5x2	1410	5305	63														49
		2.5x3	2000	7960	70	73	104	16	86	15	9	14	8.5	40	57	PT1/8"	72	72	
		3.5x1	1610	6190	63														57
		2.5x2	2980	11000	72	75	106	16	88	15	9	14	8.5	43	59	PT1/8"	82	82	
		2.5x3	4220	16500	72	93													121
	6 3.969	2.5x2	3900	13020	75	88	116	18	95	20	11	17.5	11	45	60	PT1/8"	85	85	
		2.5x3	5520	19530	75	112													125
		1.5x2	3725	10450	84														54
	10 6.35	2.5x1	3190	8710	74														45
		2.5x2	5790	17420	78	104	119	18	98	20	11	17.5	11	48	62	PT1/8"	88	130	
55	12 7.144	3.5x1	8200	26130	134														63
		2.5x1	4260	12190	84														46
		2.5x2	3700	10050	87	128	22	105	20	14	20	13	52	64	PT1/8"	20100	123	89	
		2.5x3	6710	20100	82	123													156
		2.5x2	6005	19540	84	100	125	18	103	20	11	17.5	11	54	68	PT1/8"	29310	130	140
	16 9.525	2.5x1	3510	11200	77														55
		2.5x2	6370	22400	90	107	132	20	110	20	11	17.5	11	53	76	PT1/8"	20100	123	106
		2.5x3	9020	33600	137														156
		2.5x1	4770	13780	88														59
63	12 7.938	2.5x2	8650	27560	94	124	142	22	117	20	14	20	13	57	76	PT1/8"	17100	123	113
		2.5x3	12250	41340	160														167
		2.5x1	8050	23100	100	105	150	22	123	20	14	20	13	62	79	PT1/8"	46200	153	140
	16 9.525	2.5x2	14600	46200	100	153													72
		2.5x1	7130	28500	115	109	163	22	137	20	14	20	13	64	91	PT1/8"	42750	139	129
80	12 7.938	2.5x2	9710	35560	120	125	169	22	143	25	14	20	13	67	94	PT1/8"	13760	159	120
		2.5x3	13760	53340	125	156	190	28	154	25	18	26	17.5	70	96	PT1/8"	88920	204	202
	2.5x2	16450	59280	125	156	190	28	154	25	18	26	17.5	70	96	PT1/8"	23300	153	170	
	2.5x3	23300	88920	125	156	190	28	154	25	18	26	17.5	70	96	PT1/8"	46200	153	250	



SCREW SIZE			BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm			
16	5	1.5×2	805	1525	90												39			
		2.5×1	690	1270	31	80	54	12	41	15	5.5	9.5	5.5	20	23	M6×1P	33			
		2.5×2	1250	2540	110												63			
		3.5×1	920	1780	90												45			
20	5	1.5×2	965	2070	90												47			
		2.5×1	830	1730	35	80	58	12	46	15	5.5	9.5	5.5	22	27	M6×1P	40			
		2.5×2	1510	3460	110												77			
		3.5×1	1110	2420	90												55			
25	6	1.5×2	1285	2545	104												49			
		2.5×1	1100	2120	36	92	60	12	47	15	5.5	9.5	5.5	23	28	M6×1P	41			
		3.5×1	1470	2970	104												56			
		1.5×2	1065	2575	90												57			
28	5	2.5×1	910	2150	40	80	64	12	52	15	5.5	9.5	5.5	25	32	M6×1P	48			
		2.5×2	1650	4300	110												92			
		3.5×1	1210	3010	90												65			
		1.5×2	1420	3215	104												58			
32	6	2.5×1	1210	2680	42	92	68	12	55	15	5.5	9.5	5.5	28	33	M6×1P	49			
		2.5×2	2190	5360	128												94			
		3.5×1	1610	3750	104												67			
		1.5×2	1820	3840	136												60			
36	10	2.5×1	1560	3200	45	122	72	16	58	15	6.6	11	6.5	29	35	M6×1P	50			
		3.5×1	2080	4480	136												69			
		1.5×2	1110	2960	90												62			
		2.5×1	950	2470	44	80	70	12	56	15	6.6	11	6.5	28	35	M6×1P	52			
40	6	2.5×2	1720	4940	110												101			
		3.5×1	1270	3460	90												72			
		1.5×2	1480	3605	110												63			
		2.5×1	1270	3000	44	98	70	12	56	15	6.6	11	6.5	28	36	M6×1P	53			
42	6	2.5×2	2300	6000	134												103			
		3.5×1	1690	4200	110												73			

Unit:mm

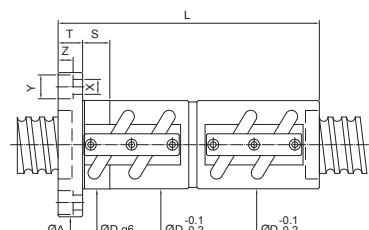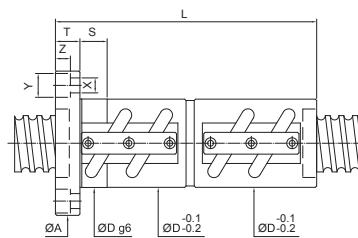



Unit:mm

SCREW SIZE			BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co		Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm			
32	5	1.5×2	1180	3410	90												69			
		2.5×1	1010	2840	80												58			
		2.5×2	1830	5680	50	110	76	12	63	15	6.6	11	6.5	30	39	M6×1P	112			
		2.5×3	2590	8520	140												164			
		3.5×1	1350	3980	90												80			
36	6	1.5×2	1560	4135	104												70			
		2.5×1	1330	3450	52	92	78	12	65	15	6.6	11	6.5	32	40	M6×1P	114			
		2.5×2	2410	6900	128												81			
		3.5×1	1770	4830	104												73			
		1.5×2	2010	5010	126												61			
42	8	2.5×1	1720	4180	54	110	88	16	70	15	9	14	8.5	33	42	M6×1P	118			
		2.5×2	3120	8360	158												84			
		3.5×1	2300	5850	126												76			
		1.5×2	3000	6530	142												64			
48	10	2.5×1	2570	5440	57	122	91	16	73	15	9	14	8.5	37	45	M8×1P	123			
		2.5×2	4660	10880	182												88			
		3.5×1	3430	7620	142												65			
		1.5×2	3180	7410	144												126			
54	12	2.5×1	2720	6180	62	124	104	18	82	20	11	17.5	11	40	49	M6×1P	136			
		2.5×2	4930	12360	184												90			
		3.5×1	3630	8650	144												83			
		1.5×2	3120	7410	144												70			

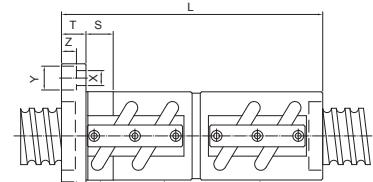



Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm	
40	5 3.175	1.5×2	1280	4275		94												82	
		2.5×1	1090	3560		84												69	
		2.5×2	1980	7120	58	114	92	16	72	15	9	14	8.5	34	47	M8×1P	133		
		2.5×3	2800	10680		144												196	
		3.5×1	1450	4980		94												95	
	6 3.969	1.5×2	1750	5300		108												85	
		2.5×1	1500	4420		96												71	
		2.5×2	2720	8840	60	132	94	16	76	15	9	14	8.5	36	48	PT1/8"	138		
		2.5×3	3850	13260		168												202	
		3.5×1	2000	6190		108												98	
	8 4.762	1.5×2	2220	6320		126												86	
		2.5×1	1900	5270	62	110	96	16	78	15	9	14	8.5	38	50	PT1/8"	73		
		2.5×2	3450	10540		158												141	
		3.5×1	2540	7380		126												100	
		1.5×2	3370	8335		152												91	
45	10 6.35	2.5×1	2880	6950	65	132	106	18	85	20	11	17.5	11	42	52	PT1/8"	71		
		2.5×2	5220	13900		192												148	
		3.5×1	3840	9730		152												105	
		2.5×1	3020	7850	70	134	112	18	90	20	11	17.5	11	48	58	PT1/8"	84		
	12 7.144	2.5×2	5480	15700		194												163	

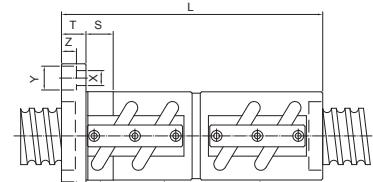


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS			
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm			
50	5 3.175	1.5×2	1410	5305		107												98			
		1.5×3	2000	7960	70	127	104	16	86	15	9	14	8.5	40	57	PT1/8"	144				
		3.5×1	1610	6190		107												114			
		2.5×2	2980	11000	6	3.969	134										PT1/8"	164			
		2.5×3	4220	16500		72	170	106	16	88	15	9	14	8.5	43	59	PT1/8"	242			
	8 4.762	2.5×2	3900	13020	8	4.762	160	116	18	95	20	11	17.5	11	45	60	PT1/8"	170			
		2.5×3	5520	19530		208	208	128	22	105	20	14	20	13	52	64	PT1/8"	250			
		1.5×2	3725	10450		10	6.35	154										119			
		2.5×1	3190	8710		134												91			
		2.5×2	5790	17420	78	194	119	18	98	20	11	17.5	11	48	62	PT1/8"	177				
	10 6.35	2.5×3	8200	26130		254												261			
		3.5×1	4260	12190		154												126			
		2.5×1	3700	10050	12	7.144	160	128	22	105	20	14	20	13	52	64	PT1/8"	92			
		2.5×2	6710	20100		232	20	11	17.5	11	48	62	64	PT1/8"	179			179			
		2.5×3	8510	29310	10	6.35	194	125	18	103	20	11	17.5	11	54	68	PT1/8"	281			
63	10 6.35	2.5×1	3510	11200		136												110			
		2.5×2	6370	22400	9	16	132	20	110	20	11	17.5	11	53	76	PT1/8"	213				
		2.5×3	9020	33600		256												313			
		2.5×1	4760	13820		160												112			
		2.5×2	8650	27560	12	7.938	160	232	142	22	117	20	14	20	13	57	76	PT1/8"	218		
80	12 7.938	2.5×3	12250	41340		304												322			
		2.5×1	8050	23100	16	9.525	200	150	22	123	20	14	20	13	62	79	PT1/8"	144			
		2.5×2	14600	46200		296	100	190	28	154	25	18	26	17.5	70	96	PT1/8"	280			
		2.5×3	10100	42750	10	6.35	200	163	22	137	20	14	20	13	64	91	PT1/8"	258			
		2.5×2	9710	35560	12	9.525	260	13760	232	169	22	143	25	14	20	13	67	94	PT1/8"	380	
16 9.525	16 9.525	2.5×2	16450	59280	302	30980	125	88920	398	190	28	154	25	18	26	17.5	70	96	PT1/8"	265	
		2.5×3	23300	88920		398	100	190	28	154	25	18	26	17.5	70	96	PT1/8"	391			
		2.5×1	8050	23100	100	296	100	190	28	154	25	18	26	17.5	70	96	PT1/8"	339			
		2.5×2	14600	46200	125	398	100	190	28	154	25	18	26	17.5	70	96	PT1/8"	500			

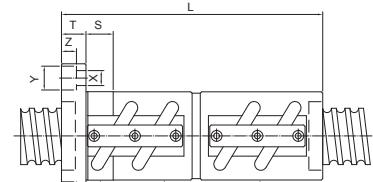


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
O.D.	LEAD			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm	
50	5 3.175	1.5×2	1410	5305		107												98	
		1.5×3	2000	7960	70	127	104	16	86	15	9	14	8.5	40	57	PT1/8"	144		
		3.5×1	1610	6190		107												114	
	6 3.969	2.5×2	2980	11000	6	3.969	134										PT1/8"	164	
		2.5×3	4220	16500		170	106	16	88	15	9	14	8.5	43	59	PT1/8"	242		
	8 4.762	2.5×2	3900																

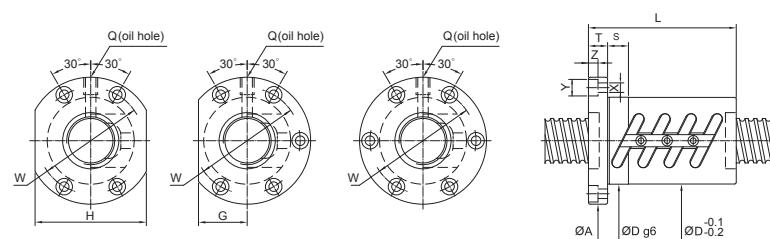

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS		
				Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	kgf/μm	
20	4	2.381	2.5×1×(2) 3.5×1×(2)	450 600	1060 1480	40 60	50 63.5	11 51	21 42	10 5.5	9.5 9.5	5.5 5.5	M6×1P	32 49		
	5	3.175	2.5×1×(2) 3.5×1×(2)	830 1110	1730 2420	44 65	56 67	11 55	26 52	15 15	5.5 9.5	9.5 5.5	M6×1P	40 55		
	6	3.969	2.5×1×(2)	1100	2120	48	67	71	11	59	27	54	15 5.5	9.5 5.5	M6×1P	41
	8	3.969	2.5×1×(2)	1100	2120	48	78	75	13	61	27	54	15 6.6	11 6.5	M6×1P	41
25	4	2.381	2.5×1×(2) 2.5×2×(2)	510 930	1355 2710	46 74	50 69	11 57	26 52	15 15	5.5 9.5	9.5 5.5	M6×1P	43 84		
	5	3.175	2.5×1×(2) 2.5×2×(2)	910 1650	2150 4300	50 85	55 73	11 61	28 56	15 15	5.5 9.5	9.5 5.5	M6×1P	48 92		
	6	3.969	2.5×1×(2) 2.5×2×(2)	1210 2190	2680 5360	53 98	62 76	11 64	29 58	15 15	5.5 9.5	9.5 5.5	M6×1P	49 94		
	8	4.762	2.5×1×(2)	1560	3200	58	77	85	13	71	32	64	15 6.6	11 6.5	M6×1P	50
28	10	4.762	2.5×1×(2)	1560	3200	58	100	85	15	71	32	64	15 6.6	11 6.5	M6×1P	50
	5	3.175	2.5×1×(2) 2.5×2×(2)	950 1720	2470 4940	55 86	56 83	12 69	31 62	15 15	6.6 6.6	11 11	M8×1P	52 101		
	6	3.969	2.5×1×(2) 2.5×2×(2)	1270 2300	3000 6000	55 100	63 83	12 69	31 62	15 15	6.6 6.6	11 11	M8×1P	53 103		
	10	4.762	1.5×1×(2)	1045	2120	60	74	93	15	76	36	72	15 9	14 8.5	M8×1P	34
32	4	2.381	2.5×1×(2) 2.5×2×(2)	565 1020	1750 3500	54 76	50 81	12 67	32	64	15 6.6	11 6.5	M6×1P	52 101		
	5	3.175	2.5×1×(2) 2.5×2×(2)	1010 1830	2840 5680	58 87	57 85	12 71	32	64	15 6.6	11 6.5	M8×1P	58 112		
	6	3.969	2.5×1×(2) 2.5×2×(2)	1330 2410	3450 6900	62 99	63 88	12 75	34	68	15 6.6	11 6.5	M8×1P	59 114		
	8	4.762	1.5×1×(2) 2.5×1×(2)	1110 1720	2510 4180	64 80	64 100	15 82	38	76	15 9	14 8.5	M8×1P	37 61		
32	10	6.35	1.5×1×(2) 2.5×1×(2)	1660 2570	3260 5440	74 97	78 108	15 90	41	82	15 9	14 8.5	M6×1P	39 64		
	12	6.35	1.5×1×(2) 2.5×1×(2)	1660 2570	3260 5440	74 110	88 108	18 90	41	82	15 9	14 8.5	M8×1P	39 64		

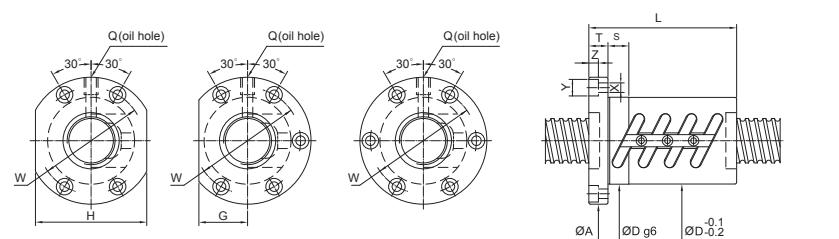

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS					
				Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm		
36	5	3.175	2.5×1×(2) 2.5×2×(2)	1060 1920	3210 6420	65	60	98	15	82	38	76	15	9	14	8.5	M8×1P	64 123	
	6	3.969	2.5×1×(2) 2.5×2×(2)	1430 2600	3950 7900	65	66	98	15	82	38	76	15	9	14	8.5	M8×1P	65 126	
	10	6.35	1.5×1×(2) 2.5×1×(2)	1750 2720	3710 6180	75	81	118	18	98	45	90	15	11	17.5	11	M8×1P	43 70	
	5	3.175	2.5×1×(2) 2.5×2×(2)	1090 1980	3560 7120	67	60	101	15	83	39	78	15	9	14	8.5	M8×1P	69 133	
40	6	3.969	2.5×1×(2) 2.5×2×(2)	1500 2720	4420 8840	70	66	104	15	86	40	80	15	9	14	8.5	PT1/8"	71 138	
	8	4.762	2.5×1×(2) 2.5×2×(2)	1900 3450	5270 10540	74	83	108	15	90	41	82	15	9	14	8.5	PT1/8"	73 141	
	10	6.35	2.5×1×(2)	2880 3850	6950 9730	82	81	103	124	18	102	47	94	20	11	17.5	11	PT1/8"	76 105
	12	6.35	2.5×1×(2)	2880 3850	6950 9730	86	81	112	128	18	106	48	96	20	11	17.5	11	PT1/8"	76 105
45	10	6.35	2.5×1×(2)	3020 3550	7850 8950	88	80	101	132	18	110	50	100	20	11	17.5	11	PT1/8"	84 85
	5	3.175	2.5×1×(2)	1210	4420	80	60	114	15	96	43	86	15	9	14	8.5	PT1/8"	83	
	6	3.969	2.5×2×(2)	2980	11000	84	103	118	15	100	45	90	15	9	14	8.5	PT1/8"	164	
	8	4.762	2.5×2×(2)	3900	13020	87	134	129	18	107	49	98	20	11	17.5	11	PT1/8"	170	
50			2.5×1×(2)	3190	8710	101												91	
	10	6.35	2.5×2×(2)	5790	17420	93	161	135	18	113	51	102	20	11	17.5	11	PT1/8"	177	
	12	7.144	2.5×1×(2)	4260	12190	121												126	
	12	7.144	2.5×1×(2)	3700	10050	100	116	146	22	122	55	110	20	14	20	13	PT1/8"	92	
55	10	6.35	2.5×1×(2) 2.5×2×(2)	3310 6005	9770 19540	102	101	144	18	122	54	108	20	11	17.5	11	PT1/8"	98 191	
	10	6.35	2.5×1×(2) 2.5×2×(2)	3510 6370	11200 22400	105	108	154	22	130	58	116	20	14	20	13	PT1/8"	110 213	
	12	7.938	2.5×1×(2)	4770	13780	115	115	124	161	22	137	61	122	20	14	20	13	PT1/8"	113

High Lead Ballscrews

FSWE

High-lead Ballscrews are essential elements and parts for high-speed machine tools of next century.

Features

It is important for a High-lead Ballscrew to be with characteristics of high rigidity, low noise and thermal control. PMI's designs and treatments are taken for following:

High DN Value

The DN value can be 130,000 in normal case. For some special cases, for example in a fixed ends case, the DN value can be as high as 140,000. Please contact our engineers for this special application.

High Speed

PMI's High-speed Ballscrews provide 100 m/min and even higher traverse speed for machine tools for high performance cutting.

High Rigidity


Both the screw and ballnut are surface hardened to a specific hardness and case depth to maintain high rigidity and durability.

Multiple thread starts are available to make more steel balls loaded in the ballnut for higher rigidity and durability.

Low Noise


Special design of ball circulation tubes offer smooth ball circulation inside the ballnut. It also makes safe ball fast running into the tubes without damaging the tubes.

Accurate ball circle diameter (BCD) through whole threads for consistent drag torque and low noise.

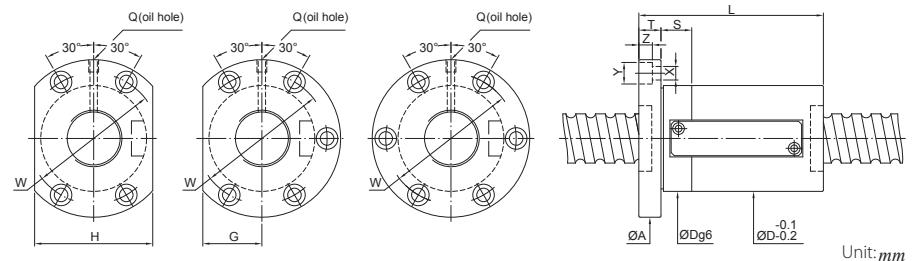


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT		BOLT		OIL HOLE	STIFFNESS	
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm
12	10	2.381	2.5×1	420	720	30	50	50	10	40	16	32	10	4.5	8	4.4 M6×1P 20
	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	46 73	63 73.5	13 13	59 59	25 25	50 50	10 10	5.5 5.5	9.5 9.5	5.5 5.5	M6×1P 34
	20	3.969	1.5×1 2.5×1	830 1210	1530 2380	46 79	63 73.5	13 13	59 59	25 25	50 50	10 10	5.5 5.5	9.5 9.5	5.5 5.5	M6×1P 45
	20	3.969	1.5×1	830	1530	46	70	73	13	59	25	50	10	5.5	9.5	5.5 M6×1P 24
25	16	3.969	1.5×1 2.5×1	920 1340	1930 3000	58 84	68 85	15 15	71 71	32 32	64 64	15 15	6.6 6.6	11 11	6.5 6.5	M6×1P 40
	20	4.762	1.5×1	1170	2300	74										29
	20	4.762	2.5×1	1710	3580	58	94	85	15	71	32	64	15	6.6	11	6.5 M6×1P 42
			3.5×1	2220	4860	114										55
32	16	3.969	1.5×1	1010	2480	67										33
			2.5×1	1470	3860	62	83	108	15	90	41	82	15	9	14	8.5 M8×1P 48
			3.5×1	1910	5240	99										63
			5×1	2340	6620	115										77
	16	6.35	2.5×1	2830	6090	92										54
			3.5×1	3680	8270	74	108	108	18	88	41	82	15	11	17.5	11 M8×1P 69
			5×1	4490	10450	124										85
			1.5×1	1010	2480	74										33
	20	3.969	2.5×1	1470	3860	62	94	108	15	90	41	82	15	9	14	8.5 M8×1P 48
			3.5×1	1910	5240	114										63
			5×1	2340	6610	134										77
			2.5×1	2830	6090	104										54
	20	6.35	3.5×1	3680	8270	74	124	108	18	88	41	82	15	11	17.5	11 M8×1P 69
			5×1	4490	10450	144										85



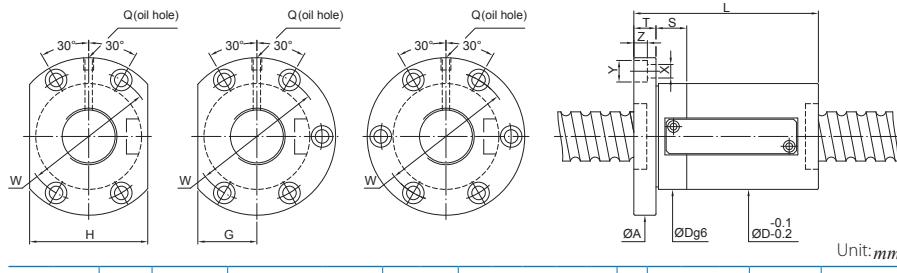

Unit:mm


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS				
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm
36	10	3.5x1	3890	9390	75	84	118	18	98	45	90	15	11	17.5	11	M8x1P	76	93	
		5x1	4750	11860		94													
		2.5x1	2990	6920		85													
		3.5x1	3890	9390	75	97	118	18	98	45	90	15	11	17.5	11	M8x1P	76	93	
		5x1	4750	11860		109													
	20	2.5x1	2990	6920		91													
		3.5x1	3890	9390	75	107	118	18	98	45	90	15	11	17.5	11	M8x1P	76	93	
		5x1	4750	11860		123													
		1.5x1	2050	4450		91													
		2.5x1	2990	6920	75	111	118	18	98	45	90	15	11	17.5	11	PT1/8"	58	76	
	40	3.5x1	3890	9390		131												93	
		5x1	4750	11860		151													
		10	6.35	3.5x1	4130	10560	86	86	128	18	106	49	98	15	11	17.5	11	PT1/8"	82
		5x1	5050	13340		96												101	
		2.5x1	3180	7780		86												63	
		3.5x1	4130	10560	86	98	128	18	106	49	98	15	11	17.5	11	PT1/8"	82	101	
		5x1	5050	13340		110													
		2.5x1	3180	7780		92												63	
		3.5x1	4130	10560	86	108	128	18	106	49	98	15	11	17.5	11	PT1/8"	82	101	
		5x1	5050	13340		124													
		2.5x1	3740	8790		92												65	
		3.5x1	4870	11930	86	108	128	18	106	49	98	15	11	17.5	11	PT1/8"	84	103	
		5x1	5950	15070		124													
		1.5x1	2180	5000		84												43	
		2.5x1	3180	7780	86	104	128	18	106	49	98	15	11	17.5	11	PT1/8"	63	82	
		3.5x1	4130	10560		124												101	
		5x1	5050	13340		144													
	40	6.35	1.5x1	2180	5000	86	130	128	18	106	49	98	15	11	17.5	11	PT1/8"	43	

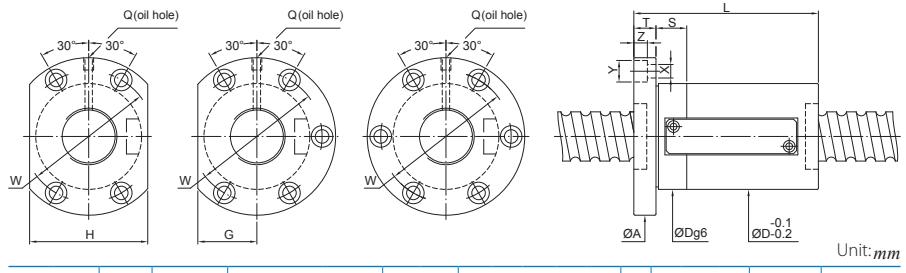

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		OIL HOLE		STIFFNESS			
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q
50	10	3.5x1	4560	13230	93	85	135	18	113	51	102	20	11	17.5	11	PT1/8"	97	119
		5x1	5580	16710		95												
		2.5x1	3510	9750		80												74
		3.5x1	4560	13230	93	92	135	18	113	51	102	20	11	17.5	11	PT1/8"	97	119
		5x1	5580	16710		104												
	20	2.5x1	4080	11260		93												75
		3.5x1	5300	15280	100	105	146	25	122	55	110	20	14	20	13	PT1/8"	99	121
		5x1	6480	19300		117												
		2.5x1	3510	9750		94												74
		3.5x1	4560	13230	93	110	135	18	113	51	102	20	11	17.5	11	PT1/8"	97	119
	16	2.5x1	4080	11260	100	124	146	25	122	55	110	15	14	20	13	PT1/8"	99	121
		3.5x1	5300	15280		144												
		5x1	6480	19300		164												
		2.5x1	4750	12090		119												78
		3.5x1	6180	16400	105	139	152	25	128	58	116	20	14	20	13	PT1/8"	101	124
	20	5x1	7550	20720		159												
		7.938	1.5x1	3250	7770	105	157	152	25	128	58	116	20	14	20	13	PT1/8"	53


FSWE

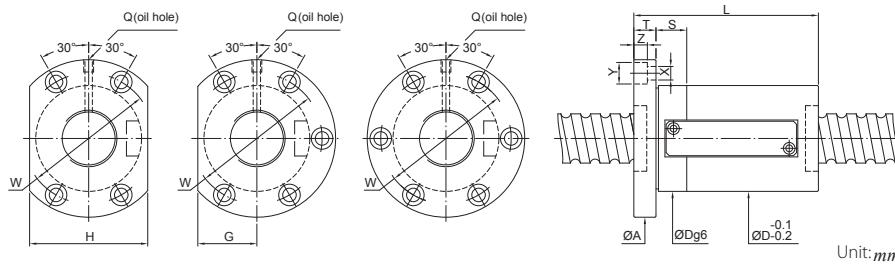

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS				
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	kgf/μm	
63	10 6.35	3.5×1 5×1	5030 6150	17020 21500	108	86 96	154	22	130	58	116	20	14	20	13	PT1/8"	115 141
	12 6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	84 96		154	22	130	58	116	20	14	20	13	PT1/8"	87 115 141
	12 7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	90 115 114											PT1/8"	89 117 145
	16 7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	97 115 129											PT1/8"	89 117 145
	16 7.938	2.5×1 3.5×1 5×1	5260 6840 8360	15430 20940 26450	112 128 144											PT1/8"	91 120 147
	20 6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	104 124 144											PT1/8"	87 115 141
	20 9.525	2.5×1 3.5×1 5×1	8870 11530 14090	25870 35110 44350	120 122 160											PT1/8"	105 136 167
	10 6.35	3.5×1 5×1	5630 6880	21660 27360	90 130	176 100	22	152	66	132	20	14	20	13	PT1/8"	133 164	
	12 7.938	3.5×1 5×1	7670 9380	27030 34140	101 113	182 22	158	68	136	20	14	20	13	PT1/8"	143 177		
	16 9.525	2.5×1 3.5×1 5×1	9900 12990 15880	32000 45050 56910	108 143 140	124 204 204	28	172	77	154	30	18	26	17.5	PT1/8"	124 162 201	
80	20 9.525	2.5×1 3.5×1 5×1	9900 12990 15880	33200 45050 56910	120 143 160											PT1/8"	124 162 201
	100	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	115 170 147											PT1/8"	139 182 226
	16 9.525	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	128 170 168											PT1/8"	139 182 226


FDWE

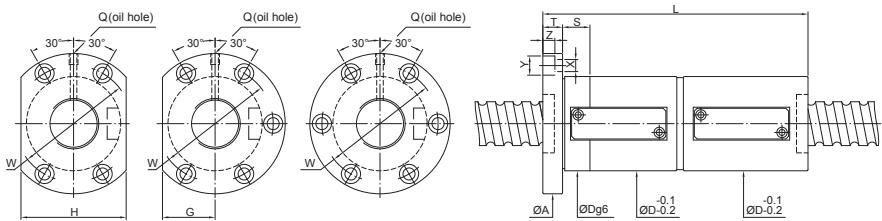

Unit:mm


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS				
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm
20	12	10 2.381	2.5×1	420	720	30	102	50	10	40	16	32	10	4.5	8	4.4 M6×1P	30
	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	46 133	113 73.5	13	59	25	50	10	5.5	9.5	5.5	M6×1P	51 68
	16	3.969	1.5×1 2.5×1	830 1210	1530 2380	46 160	128 73.5	13	59	25	50	10	5.5	9.5	5.5	M6×1P	35 51
	20	3.969	1.5×1	830	1530	46	130	73	13	59	25	50	10	5.5	9.5	5.5 M6×1P	35
	16	3.969	1.5×1 2.5×1	920 1340	1930 3000	58 158	126 85	15	71	32	64	15	6.6	11	6.5	M6×1P	41 61
	20	4.762	2.5×1 3.5×1	1170 2220	2300 4860	58 234	154 234										43 83
	16	3.969	1.5×1	1010	2480												49
	20	3.969	2.5×1 3.5×1	1470 1910	3860 5240	62 196	164 108	15	90	41	82	15	9	14	8.5	M8×1P	73 96
	5×1	2340	6620		228												120
	16	6.35	2.5×1 3.5×1 5×1	2830 4490	6090 10450	173 237											80 131
32	16	6.35	1.5×1	1010	2480	134											49
	20	3.969	2.5×1 3.5×1	1470 1910	3860 5240	62 214	174 108	15	90	41	82	15	9	14	8.5	M8×1P	73 96
	5×1	2340	6610		254												120
	20	6.35	2.5×1 3.5×1 5×1	2830 4490	6090 10450	204 284											80 131
	20	6.35	3.5×1 5×1	3680 4490	8270 10450	74 244	205	108	18	90	41	82	15	11	17.5	11 M8×1P	105 131

FDWE

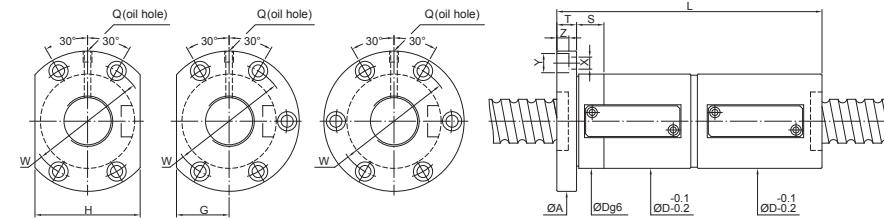

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT	BOLT	OIL HOLE	STIFFNESS					
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm
36	10	3.5×1	3890	9390	75	155 175	118	18	98	45	90	15	11	17.5	11	M8×1P	115 143
		2.5×1	2990	6920		140											88
		3.5×1	3890	9390	75	164 1860	118	18	98	45	90	15	11	17.5	11	M8×1P	115 143
		5×1	4750	11860		188											
	20	2.5×1	2990	6920		171											88
		3.5×1	3890	9390	75	203 11860	118	18	98	45	90	15	11	17.5	11	M8×1P	115 143
		1.5×1	2050	4450		164											59
		2.5×1	2990	6920	75	204 244	118	18	98	45	90	15	11	17.5	11	PT1/8"	88 115
40	10	3.5×1	4130	10560	86	155 175	128	18	106	49	98	15	11	17.5	11	PT1/8"	125 155
		2.5×1	3180	7780		141											95
		3.5×1	4130	10560	86	165 13340	128	18	106	49	98	15	11	17.5	11	PT1/8"	125 155
		5×1	5050	13340		189											
	20	2.5×1	3180	7780		173											95
		3.5×1	4130	10560	86	205 13340	128	18	106	49	98	15	11	17.5	11	PT1/8"	125 155
		5×1	5050	13340		237											
		2.5×1	3740	8790		173											98
50	16	3.5×1	4870	11930	86	205 5950	128	18	106	49	98	15	11	17.5	11	PT1/8"	128 159
		5×1	5950	15070		237											
	20	1.5×1	2180	5000		143											64
		2.5×1	3180	7780	86	183 223	128	18	106	49	98	15	11	17.5	11	PT1/8"	95 125
		3.5×1	4130	10560		263											155
	40	6.35	1.5×1	2180	5000	86	242	128	18	106	49	98	15	11	17.5	11	PT1/8"

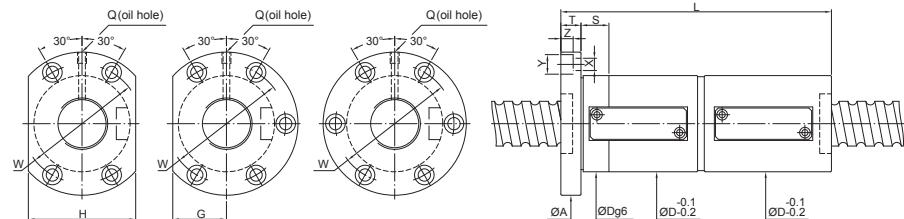


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT	BOLT	OIL HOLE	STIFFNESS					
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm
50	10	3.5×1	4560	13230	93	155 175	135	18	113	51	102	20	11	17.5	11	PT1/8"	149 185
		2.5×1	3510	9750		141											112
		3.5×1	4560	13230	93	165 175	135	18	113	51	102	20	11	17.5	11	PT1/8"	149 185
		5×1	5580	16710		189											
	16	2.5×1	4080	11260		161											114
		3.5×1	5300	15280	100	185 19300	146	25	122	55	110	20	14	20	13	PT1/8"	151 187
		5×1	6480	19300		209											
		2.5×1	3510	9750		174											112
20	16	3.5×1	4560	13230	93	206 238	135	18	113	51	102	20	11	17.5	11	PT1/8"	149 185
		5×1	5580	16710		238											
	20	2.5×1	4080	11260		173											114
		3.5×1	5300	15280	100	205 237	146	25	122	55	110	15	14	20	13	PT1/8"	151 187
		5×1	6480	19300		237											
	20	1.5×1	2790	7240		172											77
		2.5×1	4080	11260	100	204 244	146	25	122	55	110	15	14	20	13	PT1/8"	114 151
	50	3.5×1	5300	15280	100	244 284	146	25	122	55	110	15	14	20	13	PT1/8"	117 187
		5×1	6480	19300		284											
40	20	2.5×1	4750	12090		219											117
		3.5×1	6180	16400	105	259 299	152	25	128	58	116	20	14	20	13	PT1/8"	154 191
	7.938	5×1	7550	20720		299											
	50	7.938	1.5×1	3250	7770	105	305	152	25	128	58	116	20	14	20	13	PT1/8"

FDWE


FDWE

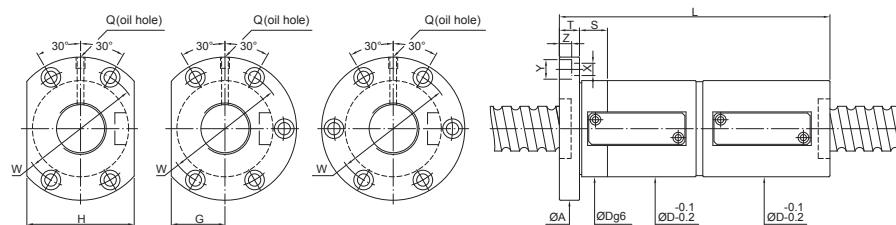

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	OIL HOLE	STIFFNESS				
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm
63	10 6.35	3.5×1 5×1	5030 6150	17020 21500	108	155 175	154	22	130	58	116	20	14	20	13	PT1/8"	178 220
	12 6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	153 201											134 178 220	
	12 7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	158 115 206											136 180 224	
	16 7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	177 115 209	161 22 137	61	122	20	14	20	13	PT1/8"			136 180 224	
	16 7.938	2.5×1 3.5×1 5×1	5260 6840 8360	15430 20940 26450	207 120 239	180 28 150	72	144	25	18	26	17.5	PT1/8"			139 184 228	
	20 6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	205 108 245	154 22 130	58	116	20	14	20	13	PT1/8"			134 178 220	
	20 9.525	2.5×1 3.5×1 5×1	8870 11530 14090	25870 35110 44350	219 122 259	182 28 150	72	144	25	18	26	17.5	PT1/8"			158 208 258	
	10 6.35	3.5×1 5×1	5630 6880	21660 27360	130	159 179	176	22	152	66	132	20	14	20	13	PT1/8"	207 256
	12 7.938	3.5×1 5×1	7670 9380	27030 34140	136	184 208	182	22	158	68	136	20	14	20	13	PT1/8"	222 275
	16 9.525	2.5×1 3.5×1 5×1	9900 12990 15880	33200 45050 56910	188 143 220	204 28 172	77	154	30	18	26	17.5	PT1/8"			189 251 311	
80	20 9.525	2.5×1 3.5×1 5×1	9900 12990 15880	33200 45050 56910	220 143 260	204 28 172	77	154	30	18	26	17.5	PT1/8"			189 251 311	
	100	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	211 170 243	243 32 205	91	182	30	22	32	21.5	PT1/8"			213 283 351	
	16 9.525	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	228 170 268	243 32 205	91	182	30	22	32	21.5	PT1/8"			213 283 351	
	20 9.525	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	308											213 283 351	


FSVE

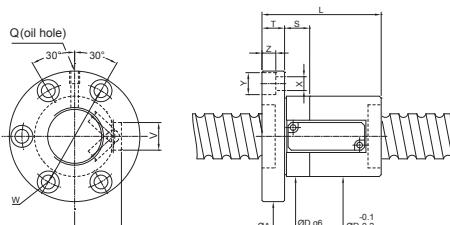


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	BOLT	RETURN TUBE	OIL HOLE	STIFFNESS				
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm	
12	10	2.381	2.5×1	420	720	25	50	48	10	36	10	4.5	8	4.4	14	12	M6×1P	20
	10	3.969	2.5×1 3.5×1	1210 1580	2380 3230	38	63	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	34 45
	16	3.969	1.5×1 2.5×1	830 1210	1530 2380	38	63	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	24 34
	20	3.969	1.5×1	830	1530	38	70	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	24
25	16	3.969	1.5×1 2.5×1	920 1340	1930 3000	42	68	68	15	55	15	6.5	11	6.6	26	14	M6×1P	28 40
	20	4.762	1.5×1 2.5×1 3.5×1	1170 1710 2220	2300 3580 4860	74											29	
	16	3.969	1.5×1	1010	2480	67											33	
	20	4.762	2.5×1 3.5×1	1470 1910	3860 5240	49	83	78	15	63	15	6.6	11	6.5	30	16	M8×1P	48 63
32	16	3.969	1.5×1 2.5×1 3.5×1 5×1	2340	6610	115											77	
	16	6.35	2.5×1 3.5×1 5×1	2830 3680 4490	6090 8270 10450	92											54	
	20	3.969	1.5×1 2.5×1 3.5×1 5×1	1010 1470 1910 2340	2480 3860 5240 6610	74											69 85	
	20	6.35	3.5×1 5×1	3680 4490	8270 10450	57	108	98	18	77	20	11	17.5	11	34	22	M8×1P	69 85
100	16	9.525	2.5×1	11320	41820	211												33
	20	9.525	2.5×1	7670	27030	184	182	22	158	68	136	20	14	20	13	PT1/8"	222	48
	16	9.525	3.5×1	9900	33200	188												63
	20	9.525	3.5×1	9900	45050	188	143	220	204	28	172	77	154	30	18	26	17.5	PT1/8"

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm
36	10 6.35	3.5×1 5×1	3890	9390	60	84	100	18	80	20	11	17.5	11	36	22	M8×1P	76	93
		2.5×1	2990	6920		85												58
		3.5×1 5×1	3890	9390	60	97	100	18	80	20	11	17.5	11	36	22	M8×1P	76	93
		2.5×1	2990	6920		109												58
		3.5×1 5×1	3890	9390	60	107	100	18	80	20	11	17.5	11	36	22	M8×1P	76	93
	20 6.35	3.5×1 5×1	2050	4450		91												41
		2.5×1	2990	6920	60	111	100	18	80	20	11	17.5	11	36	22	M8×1P	58	76
		3.5×1 5×1	3890	9390	60	131												93
		2.5×1	2990	6920		151												
		3.5×1 5×1	4750	11860														
40	10 6.35	3.5×1 5×1	4130	10560	64	86	104	18	84	20	11	17.5	11	38	22	PT1/8"	82	101
		2.5×1	3180	7780		86												63
		3.5×1 5×1	4130	10560	64	98	104	18	84	20	11	17.5	11	38	22	PT1/8"	82	101
		2.5×1	3180	7780		110												
		3.5×1 5×1	4130	10560	64	109	104	18	84	20	11	17.5	11	38	22	PT1/8"	82	
	16 6.35	3.5×1 5×1	4130	10560	64	125												101
		2.5×1	3740	8790		92												65
		3.5×1 5×1	4870	11930	64	108	104	18	84	15	11	17.5	11	39	20	PT1/8"	84	
		2.5×1	5950	15070		124												103
		3.5×1 5×1	2180	5000		84												43
20	6.35	1.5×1	2180	5000	64	104	104	18	84	20	11	17.5	11	38	22	PT1/8"	63	
		2.5×1	3180	7780		124												82
		3.5×1 5×1	4130	10560		144												101
		1.5×1	2180	5000	64	130	104	18	84	20	11	17.5	11	38	20	PT1/8"	43	

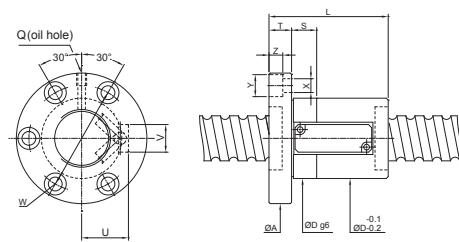


Unit:mm

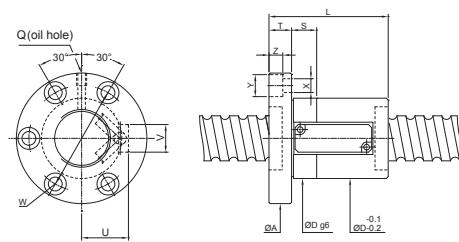


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm
50	10 6.35	3.5×1 5×1	4560	13230	73	85	118	18	96	20	11	17.5	11	43	22	PT1/8"	97	119
		2.5×1	3510	9750		82												74
		3.5×1 5×1	4560	13230	73	94	118	18	96	20	11	17.5	11	43	22	PT1/8"	97	119
		2.5×1	4080	11260		93												75
		3.5×1 5×1	5300	15280	75	105	122	20	98	15	14	20	13	44	24	PT1/8"	99	121
	16 6.35	2.5×1	3510	9750		94												74
		3.5×1 5×1	4560	13230	73	110	118	18	96	20	11	17.5	11	43	22	PT1/8"	97	119
		2.5×1	4080	11260		126												75
		3.5×1 5×1	5300	15280	75	116	122	20	98	15	14	20	13	44	22	PT1/8"	99	121
		2.5×1	4080	11260		132												75
20	7.144	1.5×1	2790	7240		98												52
		2.5×1	4080	11260	75	118	122	20	98	15	14	20	13	44	20	PT1/8"	75	99
		3.5×1 5×1	5300	15280	75	138												121
	7.938	2.5×1	4750	12090		119												78
		3.5×1 5×1	6180	16400	76	139	123	25	99	20	14	20	13	46	25	PT1/8"	101	
		2.5×1	7550	20720		159												124
	50 7.938	1.5×1	3250	7770	76	157	123	25	99	20	14	20	13	46	25	PT1/8"	53	

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
			Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm	
63	10	3.5x1 5x1	5030 6150	17020 21500	86 96	133 22	108 20	20	14	20	13	49	24	PT1/8"	115 141			
		2.5x1	3870	12540	84											87		
		3.5x1 5x1	5030 6150	17020 21500	86 108	133 22	108 20	20	14	20	13	49	24	PT1/8"	115 141			
		2.5x1	4540	14460	90											89		
		3.5x1 5x1	5900 7210	19620 24780	87 114	102 134	22	110 20	20	14	20	13	50	25	PT1/8"	117 145		
		2.5x1	4540	14460	97											89		
		3.5x1 5x1	5900 7210	19620 24780	87 129	113 134	22	110 20	20	14	20	13	50	25	PT1/8"	117 145		
	16	2.5x1	5260	15430	112											91		
		3.5x1 5x1	6840 8360	20940 26450	89 144	128 148	28	118 25	25	18	26	17.5 52	25	PT1/8"	120 147			
		2.5x1	3870	12540	104											87		
		3.5x1 5x1	5030 6150	17020 21500	86 144	124 133	22	108 20	20	14	20	13	49	24	PT1/8"	115 141		
		2.5x1	5260	15430	120											91		
		3.5x1 5x1	6840 8360	20940 26450	89 160	140 148	28	118 25	25	18	26	17.5 52	25	PT1/8"	120 147			
		2.5x1	8870	25870	120											105		
	20	3.5x1 5x1	11530 14090	35110 44350	93 160	140 152	28	122 25	25	18	26	17.5 54	28	PT1/8"	136 167			
		2.5x1	5630 6880	21660 27360	103 100	150 22	126 20	20	14	20	13	58	25	PT1/8"	133 164			
		3.5x1 5x1	7670 9380	27030 34140	101 113	170 22	146 20	20	14	20	13	66	28	PT1/8"	143 177			
		2.5x1	9900	33200	108											124		
		3.5x1 5x1	12990 15880	45050 56910	126 140	124 185	28	155 30	30	18	26	17.5 70	28	PT1/8"	162 201			
		2.5x1	9900	33200	120											124		
		3.5x1 5x1	12990 15880	45050 56910	126 160	140										162 201		
100	16	2.5x1	11320	41820	115											139		
		3.5x1 5x1	14720 17990	56750 71690	146 147	131 217	32	181 30	30	22	32	21.5 82	35	PT1/8"	182 226			
	20	2.5x1	11320	41820	128											139		
		3.5x1 5x1	14720 17990	56750 71690	146 168	148 217	32	181 30	30	22	32	21.5 82	35	PT1/8"	182 226			

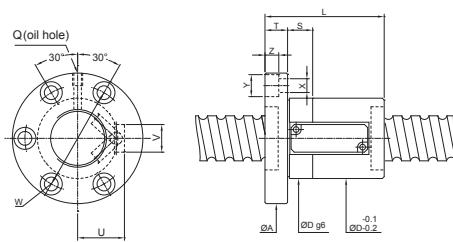


Unit:mm

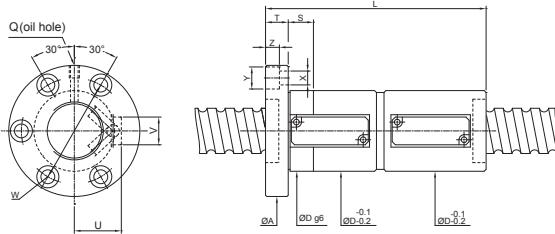


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE		STIFFNESS	
			Dynamic (1×10 ⁶ REV.)	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q	kgf/μm	
20	12	2.5x1	420	720	25	102	48	10	36	10	4.5	8	4.4	14	12	M6×1P	30	
		3.5x1	1210	2380	38	113	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	51	
		5x1	1580	3230	133												68	
		1.5x1 2.5x1	830	1530	38	128	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	35	
		2.5x1	1210	2380	160												51	
	25	1.5x1	830	1530	38	130	62	13	50	10	5.5	9.5	5.5	23	15	M6×1P	35	
		2.5x1 5x1	920	1930	42	126	68	15	55	15	6.6	11	6.5	26	14	M6×1P	41	
		2.5x1	1340	3000	158												61	
		1.5x1 3.5x1	1170	2300	154												43	
		3.5x1	1710	3580	44	194	72	15	59	15	6.6	11	6.5	28	14	M6×1P	63	
32	16	1.5x1 2.5x1 5x1	1010	2480	49	164	78	15	63	15	6.6	11	6.5	30	16	M8×1P	49	
		1910	5240	196	2340	6610											73	
		2.5x1	2830	6090	173												96	
		3.5x1 5x1	3680	8270	57	205	98	18	77	20	11	17.5	11	34	22	M8×1P	105	
		4490	10450	237													131	
	20	1.5x1 2.5x1 5x1	1010	2480	134												49	
		1910	5240	214	174	78	15	63	15	6.6	11	6.5	30	16	M8×1P	73		
		2.5x1	2830	8200	204												96	
		3.5x1 5x1	3680	11120	57	244	98	18	77	20	11	17.5	11	34	22	M8×1P	105	
		4490	14050	284													131	

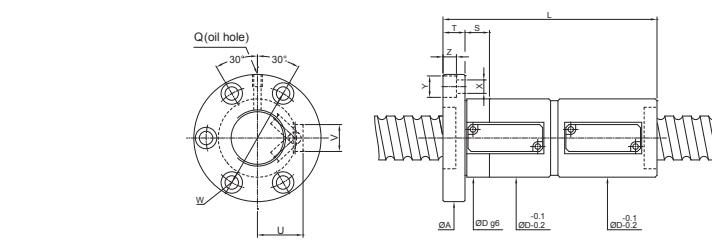

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT	FLANGE	FIT	BOLT	RETURN TUBE	OIL HOLE	STIFFNESS						
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm	
36	10 6.35	3.5×1	3890	9390	60	155	100	18	80	20	11	17.5	11	36	22	M8×1P	115 143
		5×1	4750	11860	175												
		2.5×1	2990	6920	152												88
		3.5×1	3890	9390	60	176	100	18	80	20	11	17.5	11	36	22	M8×1P	115 143
	16 6.35	3.5×1	3890	9390	60	205	100	18	80	20	11	17.5	11	36	22	M8×1P	115 143
		5×1	4750	11860	237												
		2.5×1	2990	6920	173												88
		1.5×1	2050	4450	164												59
40	10 6.35	2.5×1	2990	6920	60	204	100	18	80	20	11	17.5	11	36	22	M8×1P	88 115 143
		3.5×1	3890	9390	60	244	100	18	80	20	11	17.5	11	36	22	M8×1P	
		5×1	4750	11860	284												
		3.5×1	4130	10560	64	155	104	18	84	20	11	17.5	11	38	22	PT1/8"	125 155
	16 6.35	2.5×1	3180	7780	141												95
		3.5×1	4130	10560	64	165	104	18	84	20	11	17.5	11	38	22	PT1/8"	125 155
		5×1	5050	13340	189												
		2.5×1	3180	7780	173												95
	20 6.35	3.5×1	4130	10560	64	205	104	18	84	20	11	17.5	11	38	22	PT1/8"	125 155
		5×1	5050	13340	237												
		2.5×1	3740	8790	173												98
		3.5×1	4870	11930	64	205	104	18	84	15	11	17.5	11	39	20	PT1/8"	128 159
50	20 6.35	1.5×1	2180	5000	143												64
		2.5×1	3180	7780	64	183	104	18	84	20	11	17.5	11	38	22	PT1/8"	95
		3.5×1	4130	10560	223												125
		5×1	5050	13340	263												155
	40 6.35	1.5×1	2180	5000	64	242	104	18	84	20	11	17.5	11	38	20	PT1/8"	64
		3.5×1	4870	11930	64	205	104	18	84	15	11	17.5	11	39	20	PT1/8"	
		5×1	5950	15070	237												
		2.5×1	3740	8790	173												98

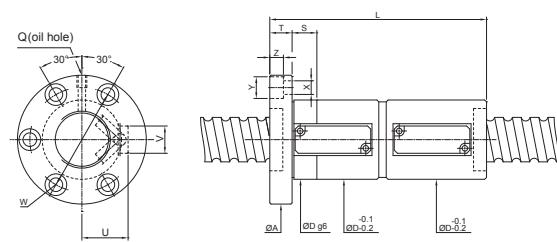


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT	FLANGE	FIT	BOLT	RETURN TUBE	OIL HOLE	STIFFNESS						
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm	
50	10 6.35	3.5×1	4560	13230	73	155	118	18	96	20	11	17.5	11	43	22	PT1/8"	149 185
		5×1	5580	16710	175												
		2.5×1	3510	9750	152												112
		3.5×1	4560	13230	73	176	118	18	96	20	11	17.5	11	43	22	PT1/8"	149 185
	16 6.35	3.5×1	5300	15280	75	185	122	20	98	15	14	20	13	44	24	PT1/8"	151 187
		5×1	6480	19300	209												
		2.5×1	3510	9750	174												112
		3.5×1	4560	13230	73	206	118	18	96	20	11	17.5	11	43	22	PT1/8"	149 185
40	16 7.144	3.5×1	4080	11260	161												114
		5×1	5300	15280	75	185	122	20	98	15	14	20	13	44	24	PT1/8"	151 187
		1.5×1	2790	7240	172												77
		2.5×1	4080	11260	75	204	122	20	98	15	14	20	13	44	20	PT1/8"	114 151
	20 7.144	3.5×1	5300	15280	75	244	122	20	98	15	14	20	13	44	20	PT1/8"	187
		5×1	6480	19300	284												
		2.5×1	4750	12090	219												117
		3.5×1	6180	16400	76	259	123	25	99	20	14	20	13	46	25	PT1/8"	154 191
20	50 7.938	3.5×1	7550	20720	299												
		5×1	3250	7770	76	305	123	25	99	20	14	20	13	46	25	PT1/8"	79
		2.5×1	4750	12090	219												
		1.5×1	2180	5000	64	242	104	18	84	20	11	17.5	11	38	20	PT1/8"	64

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE	STIFFNESS		
			O.D.	LEAD	Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	Q
63	10	6.35	3.5×1 5×1	5030 6150	17020 21500	86 175	155	133	22	108	20	14	20	13	49	24	PT1/8"	178 220
	12	6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	86 177 201	153											134
	12	7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	87 182 206	158											136
	16	7.144	2.5×1 3.5×1 5×1	4540 5900 7210	14460 19620 24780	87 187 206	177											180 224
	16	7.938	2.5×1 3.5×1 5×1	5260 6840 8360	15430 20940 26450	89 239 271	207											139
	20	6.35	2.5×1 3.5×1 5×1	3870 5030 6150	12540 17020 21500	86 177 285	205											184 228
	20	7.938	2.5×1 3.5×1 5×1	5260 6840 8360	15430 20940 26450	89 261 301	221											134
	20	9.525	2.5×1 3.5×1 5×1	8870 11530 14090	25870 35110 44350	93 259 299	219											139 184 228
	10	6.35	3.5×1 5×1	5630 6880	21660 27360	103 179	159	150	22	126	20	14	20	13	58	25	PT1/8"	207 256
	12	7.938	3.5×1 5×1	7670 9380	27030 34140	123 208	184	170	22	146	20	14	20	13	66	28	PT1/8"	222 275
80	16	9.525	2.5×1 3.5×1 5×1	9900 12990 15880	33200 45050 56910	188 126 252												189
	20	9.525	2.5×1 3.5×1 5×1	9900 12990 15880	33200 45050 56910	188 126 300												189 251 311
	16	9.525	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	211 146 275												213 283 351
	20	9.525	2.5×1 3.5×1 5×1	11320 14720 17990	41820 56750 71690	228 146 308												213 283 351

PMI Precision Ground BallScrew

Low Noise Series

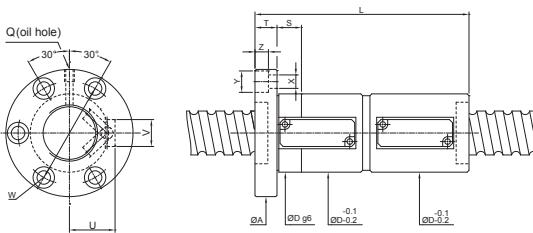

Unit:mm

Features

Lower Noise

TYPE-S SERIES: Optimum design of recirculation path can absorb noise from impact of balls to reduce noise level 5~10 dB, comparing with general series.

Quality Tone

The materials of recirculation structure made from composite materials will keep low audio frequency and supple.

Low Vibration and Smooth Operation

The recirculation path adapts tangency design that reduces impact force form balls, for the reason that the vibration of nut is smoothly.


Applications

CNC Machinery / General Machines / Semi-conductor Equipments



S series


FSWS

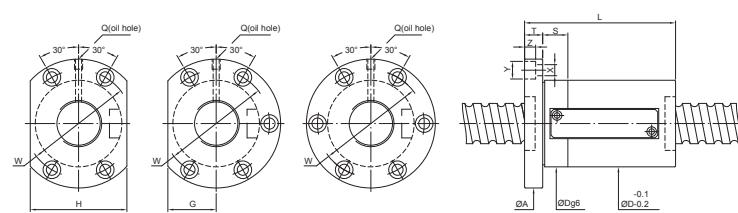

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE	STIFFNESS			
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm		
32	8	4.762	5×1	3900	10930	66	82	102	15	84	37	74	15	9	14	8.5	M8×1P	80	
	12	6.35	5×1 3.5×1	5690 4620	14770 11400	74	104 108	108	18	88	41	82	15	11	17.5	11	M8×1P	85 69	
	16	6.35	5×1	5650	14390	74	124	108	18	88	41	82	15	11	17.5	11	M8×1P	85	
	20	6.35	5×1	5600	14300	748	144	108	18	88	41	82	15	11	17.5	11	M8×1P	58	
36	10	6.35	5×1	6080	16460	78	95	121	18	99	45	90	15	11	17.5	11	M8×1P	93	
	8	4.762	5×1	4410	14230	74	82	118	18	96	49	98	15	11	17.5	11	PT1/8"	94	
	10	6.35	5×1	6410	18420	86	96	128	18	106	49	98	15	11	17.5	11	PT1/8"	101	
	12	6.35	5×1	6400	18390	86	110	128	18	106	49	98	15	11	17.5	11	PT1/8"	101	
40	12	7.144	5×1	7520	20800	86	104	128	18	106	49	98	15	11	17.5	11	PT1/8"	103	
	10		1.5×1	3220	7770	76												45	
	16	7.144	2.5×1 3.5×1	4710 6130	12090 16410	86	92	128	18	106	49	98	15	11	17.5	11	PT1/8"	65 84	
	20	6.35	3.5×1 5×1	5190 6340	14450 18260	86	124 144	128	18	106	49	98	15	11	17.5	11	PT1/8"	82 101	
45	10	7.144	3.5×1	6490	18460	90	86	133	18	111	49	98	20	11	17.5	11	PT1/8"	91	
	12	7.144	5×1	7920	23300	90	104	136	18	114	49	98	20	11	17.5	11	PT1/8"	113	
			2.5×1	4970	13560	91	136			114								70	
	16	7.144	3.5×1 5×1	6460 7900	18400 23240	90	108	134	18	112	49	98	20	11	17.5	11	PT1/8"	91 113	
50	8	4.762	5×1	4780	17550	84	84	127	18	105	45	90	20	11	17.5	PT1/8"		109	
	12	7.938	5×1	9590	28790	100	100	105	146	18	122	58	116	20	14	20	PT1/8"		124
80	12	7.937	5×1	11890	47170	136	136	113	182	22	158	68	136	20	14	20	PT1/8"		177


FDWS

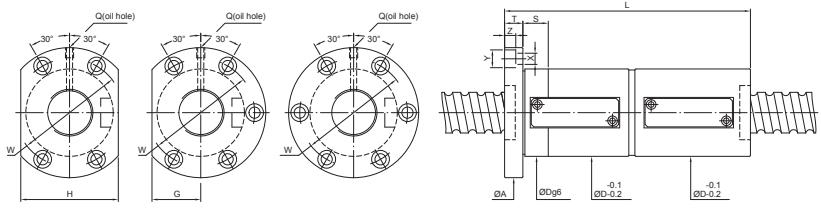

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE	STIFFNESS		
			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	S	X	Y	Z	Q	kgf/μm	
32	8	4.762	5×1	3900	10930	66	146	102	15	84	37	74	15	9	14	8.5	M8×1P	124
	12	6.35	5×1	5690	14470	74	197	108	18	88	41	82	15	11	17.5	11	M8×1P	131
	16	6.35	3.5×1	4620	11400	74	205	108	18	88	41	82	15	11	17.5	11	M8×1P	105
	20	6.35	5×1	5600	14300	74	284	108	18	88	41	82	15	11	17.5	11	M8×1P	131
36	10	6.35	5×1	6080	16460	78	175	121	18	99	45	90	15	11	17.5	11	M8×1P	142
	8	4.762	5×1	4410	14230	74	146	118	18	96	49	98	15	11	17.5	11	PT1/8"	147
	10	6.35	5×1	6410	18420	86	175	128	18	106	49	98	15	11	17.5	11	PT1/8"	155
	12	6.35	5×1	6400	18390	86	189	128	18	106	49	98	15	11	17.5	11	PT1/8"	155
40	12	7.144	5×1	7520	20800	86	197	128	18	106	49	98	15	11	17.5	11	PT1/8"	158
	10		1.5×1	3220	7770	76												65
	16	7.144	2.5×1 3.5×1	4710 6130	12090 16410	86	173	128	18	106	49	98	15	11	17.5	11	PT1/8"	98 128
	20	6.35	3.5×1 5×1	5190 6340	14450 18260	86	223 263	128	18	106	49	98	15	11	17.5	11	PT1/8"	125 155
45	10	7.144	3.5×1	6490	18460	90	156	133	18	111	49	98	20	11	17.5	11	PT1/8"	139
	12	7.144	5×1	7920	23300	90	188	136	18	114	49	98	20	11	17.5	11	PT1/8"	173
			2.5×1	4970	13560	91	164	136		114								106
	16	7.144	3.5×1 5×1	6460 7900	18400 23240	90	196	134	18	112	49	98	20	11	17.5	11	PT1/8"	139 173
50	8	4.762	5×1	4780	17550	84	145	127	18	105	45	90	20	11	17.5	11	PT1/8"	169
	12	7.938	5×1	9590	28790	100	219	146	18	122	58	116	20	14	20	13	PT1/8"	191
80	12	7.938	5×1	11890	47170	136	208	182	22	158	68	136	20	14	20	13	PT1/8"	275


FSVS

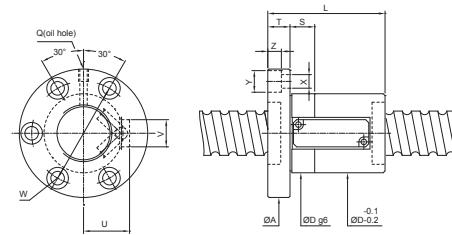

Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE	STIFFNESS	
O.D.	LEAD			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm	
32	8	4.762	5×1	3900	10930	53	82	87	15	69	15	9	14	8.5	31	16	M8×1P	80
	12	6.35	5×1	5690	14470	57	104	98	18	77	20	11	17.5	11	34	22	M8×1P	85
	16	6.35	3.5×1 5×1	4620 5650	11400 14390	57	108 124	98	18	77	20	11	17.5	11	34	22	M8×1P	69 85
	20	6.35	5×1	5600	14300	57	144	98	18	77	20	11	17.5	11	34	22	M8×1P	85
36	10	6.35	5×1	6080	16460	61	95	103	18	81	20	11	17.5	11	36	22	M8×1P	93
	8	4.762	5×1	4410	14230	62	82	104	18	82	20	11	17.5	11	36	22	PT1/8"	94
	10	6.35	5×1	6410	18420	64	96	104	18	84	20	11	17.5	11	38	22	PT1/8"	101
	12	6.35	5×1	6400	18390	64	110	104	18	84	20	11	17.5	11	38	22	PT1/8"	101
40	12	7.144	5×1	7520	20800	64	104	104	18	84	15	11	17.5	11	39	20	PT1/8"	103
	16	7.144	1.5×1 2.5×1	3220 4710	12090	64	76 92	104	18	84	15	11	17.5	11	39	20	PT1/8"	45 65
	16	7.144	3.5×1	6130	16410	64	108	104	18	84	15	11	17.5	11	39	20	PT1/8"	84
	20	6.35	3.5×1 5×1	5190 6340	14450 18260	69	124 144	104	18	84	20	11	17.5	11	38	22	PT1/8"	82 101
45	10	7.144	3.5×1	6490	18460	73	86	115	18	93	20	11	17.5	11	45	22	PT1/8"	91
	12	7.144	5×1	7920	23300	76	104	118	18	96	20	11	17.5	11	45	22	PT1/8"	113
			2.5×1	4970	13560	91												70
	16	7.144	3.5×1 5×1	6460 7900	18400 23240	75	108	117	18	95	20	11	17.5	11	45	22	PT1/8"	91 113
50	8	4.762	5×1	4780	17550	71	81	113	18	91	20	11	17.5	11	40	22	PT1/8"	109
	12	7.938	5×1	9590	28790	81	105	127	18	103	20	14	20	13	46	25	PT1/8"	124
80	12	7.938	5×1	11890	47170	123	113	170	22	146	20	14	20	13	66	28	PT1/8"	177

FDVS


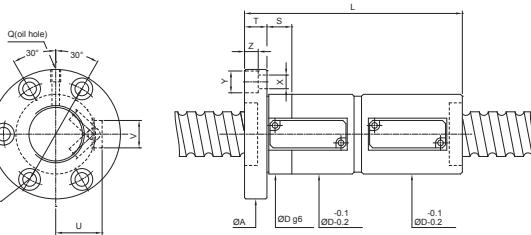


Unit:mm



SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		BOLT		RETURN TUBE		OIL HOLE	STIFFNESS	
O.D.	LEAD			Dynamic (1×10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	X	Y	Z	U	V	kgf/μm	
32	8	4.762	5×1	3900	10930	53	146	87	15	69	15	9	14	8.5	31	16	M8×1P	124
	12	6.35	5×1	5690	14470	57	197	98	18	77	20	11	17.5	11	34	22	M8×1P	131
	16	6.35	3.5×1 5×1	4620 5650	11400 14390	57	205 237	98	18	77	20	11	17.5	11	34	22	M8×1P	105 131
	20	6.35	5×1	5600	14300	57	284	98	18	77	20	11	17.5	11	34	22	M8×1P	131
36	10	6.35	5×1	6080	16460	61	175	103	18	81	20	11	17.5	11	36	22	M8×1P	142
	8	4.762	5×1	4410	14230	62	146	104	18	82	20	11	17.5	11	36	22	PT1/8"	147
	10	6.35	5×1	6410	18420	64	175	104	18	84	20	11	17.5	11	38	22	PT1/8"	155
	12	6.35	5×1	6400	18390	64	189	104	18	84	20	11	17.5	11	38	22	PT1/8"	155
40	12	7.144	5×1	7520	20800	64	197	104	18	84	15	11	17.5	11	39	20	PT1/8"	158
			1.5×1	3220	7770	141												65
	16	7.144	2.5×1	4710	12090	64	173	104	18	84	15	11	17.5	11	39	20	PT1/8"	98
			3.5×1	6130	16410	64	205											128
45	20	6.35	3.5×1 5×1	5190 6340	14450 18260	69	223	104	18	84	20	11	17.5	11	38	22	PT1/8"	125 155
	10	7.144	3.5×1	6490	18460	73	156	115	18	93	20	11	17.5	11	45	22	PT1/8"	139
	12	7.144	5×1	7920	23300	76	188	118	18	96	20	11	17.5	11	45	22	PT1/8"	173
			2.5×1	4970	13560	164												106
50	16	7.144	3.5×1 5×1	6460 7900	18400 23240	75	196	117	18	95	20	11	17.5	11	45	22	PT1/8"	139 173
	8	4.762	5×1	4780	17550	71	145	113	18	91	20	11	17.5	11	40	22	PT1/8"	169
80	12	7.938	5×1	9590	28790	81	219	127	18	103	20	14	20	13	46	25	PT1/8"	191
	12	7.938	5×1	11890	47170	123	208	170	22	146	20	14	20	13	66	28	PT1/8"	275

Features

The back system is designed by the front and rear ends of cycle paths, with the nut on the through-hole as the ball back, so that all nuts are covered with bead groove ball so effectively in the same length under the nut, end plugs nuts than the outer cycle nut with higher dynamic loads.

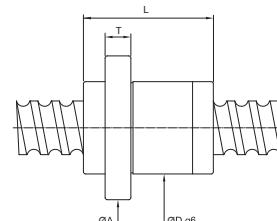

Unit:mm

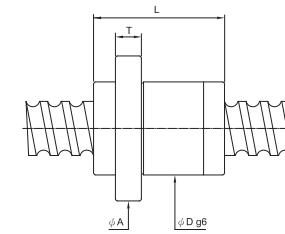

Unit:mm

SCREW SIZE O.D.	LEAD	BALL DIA	EFFECTIVE TURNS circuit × number of thread	BALLNUT DIMENSION								
				BASIC RATE LOAD (kgf)								
				Dynamic (1×10 ⁶ REV.) Ca	Static Co	NUT		FLANGE		BOLT	OIL HOLE	STIFFNESS kgf/ μ m
Dg6	L	A	T	H	W	X	Q					
15	10	3.175	2.8×2	1410	2800	34	44	57	10	40	45	5.5 M6×1P 34
16	16	3.175	1.8×2	700	1400	32	38	53	10	38	42	4.5 M6×1P 18
20	20	3.175	1.8×2	1100	2500	39	52	62	10	46	50	5.5 M6×1P 29
25	25	3.969	1.8×2	1650	3900	47	62	74	12	56	60	6.6 M6×1P 35
			1.8×4	2830	7800							69
32	32	4.762	1.8×2	2360	5940	58	78	92	15	68	74	9 M6×1P 44
			1.8×4	4280	11800							87
36	24	7.144	2.8×2	6450	15220	75	94	115	18	86	94	11 M6×1P 77
40	40	6.35	1.8×2	3860	9900	73	95	114	17	84	93	11 M6×1P 55
			1.8×4	7000	19880							108
50	50	7.938	1.8×2	5800	15800	90	122	135	20	104	112	14 M6×1P 68
			1.8×4	10520	31600							135

SCREW SIZE O.D.	LEAD	BALL DIA	EFFECTIVE TURNS circuit × number of thread	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION							
				Dynamic (1×10 ⁶ REV.) Ca	Static Co	NUT Dg6	NUT L	FLANGE A	FLANGE T	FLANGE H	FLANGE W	BOLT X	OIL HOLE Q
15	30	3.715	0.8×2	480	800	32	34	53	10	33	43	5.5	M6×1P 12
			1.8×1	530	900		64						13
20	40	3.175	0.8×2	550	1110	38	41	58	10	40	48	5.5	M6×1P 14
			1.8×1	610	1250		81						16
25	50	3.969	0.8×2	820	1730	46	50	70	12	48	58	6.6	M6×1P 17
			1.8×1	910	1950		100						19

Ballscrews For Heavy Load

Features

Focused on improvements of contact points of balls and thread grooves, ball diameter and circulation system for new type, FSVH. The rated dynamic load has been increased to as two times as that of conventional type, FSVC.

Long Life

Structure of the newly developed circulation system is designed to distribute the load uniformly to the load balls and it also increases the life of ballscrews. On conventional circulation system, FSVC, the returning tube is inserted into the holes on ballnut perpendicularly which forms an advancing angle. While ball moves into returning tube, it will hit tube end area and then move into returning tube. New circulation system, FSVH, ball will move into returning tube smoothly by tangent line as the same direction as lead angle. It can increase the life of circulation system structure.

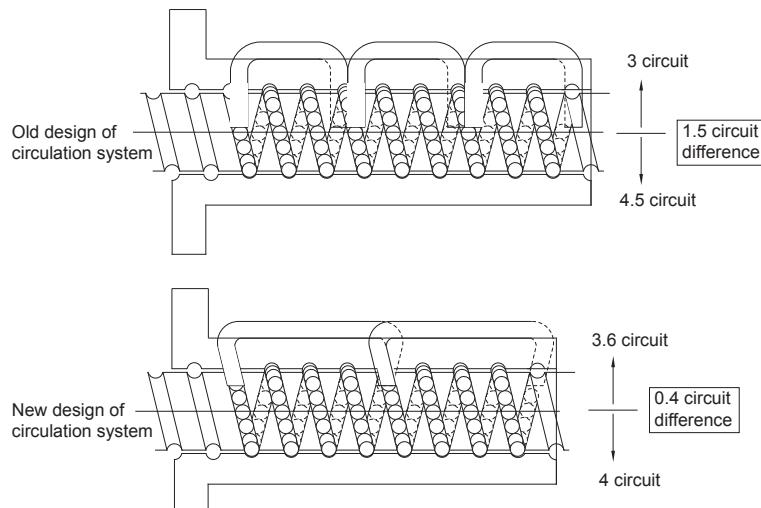


Fig.4 Circuit difference for heavy load ballscrew

High DN Value

With the newly developed circulation system, ballscrews can meet the demands of high speed running with high DN value.

Low Noise

To use tangential circulation system structure, it can eliminate the noise while balls run into the returning tube.

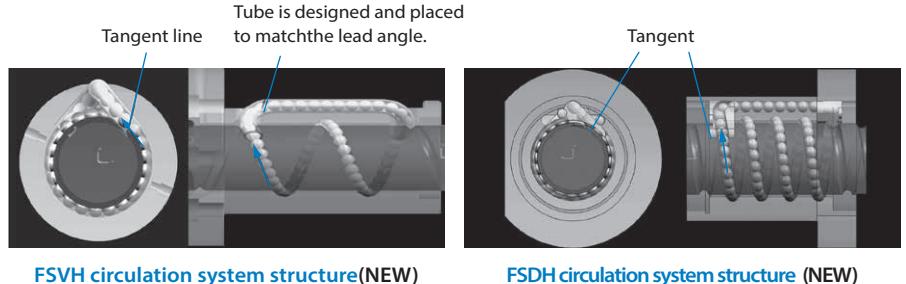


Fig.5 Circulation system structure for FSVH and FSDH

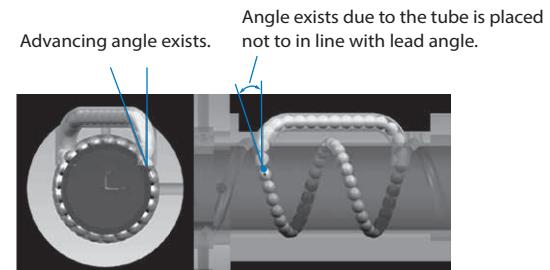


Fig.6 Circulation system structure for FSVC

Various Specifications Combination

PMI can supply various ballscrews with diameter 40~120mm and lead 10mm to 60mm (Please contact PMI for your specific design requirement)

Recommend mounting direction of heavy load ball screws

In order to support equal load distribution for shaft and nut, recommend mounting direction of ball screws allow fig.7[A1-182] This mounting direction can avoid vibration as axial load uneven distribution for ball screws, therefore increase service life efficient.

FSVH

Accuracy Grade and Axial Play

If you have any question about accuracy grade and axial play(e.g. axial play <0), please contact our sales for your specific design requirement.

Unit:mm

Grade	Axial play	S	N
	0.010 or less	0.030 or less	
C6	C6S	C6N	

Application

Plastic Injection Machines / Press and Forging Machines / Semi-conductor Equipments / General Machines

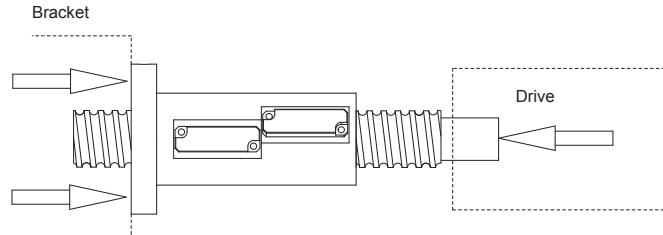


Fig.7 Recommend mounting direction of heavy load ballscrew



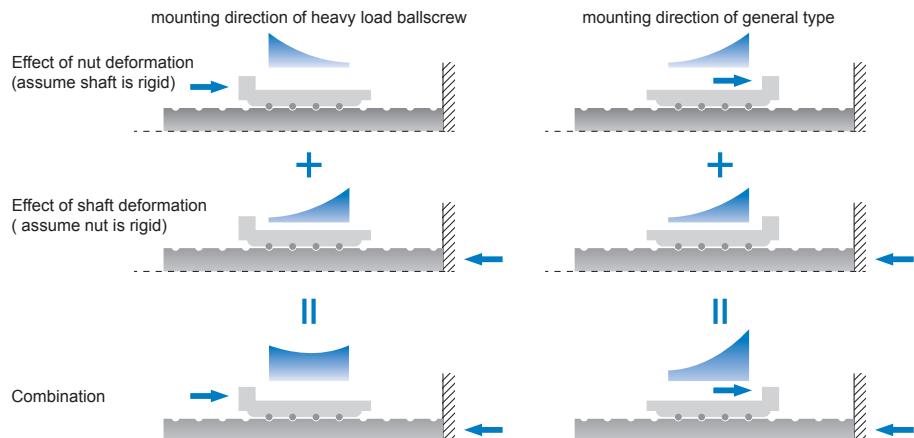


Fig.8 Load distribution

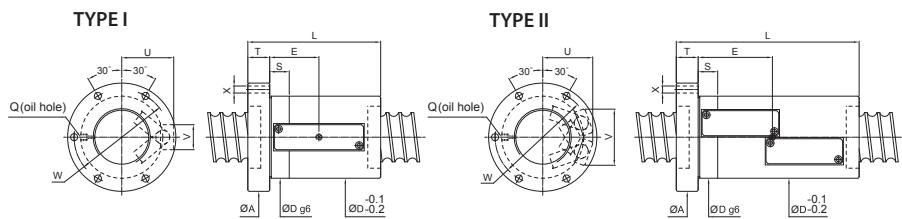


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		NUT		FLANGE		FIT		OIL HOLE		BOLT	RETURN TUB	Type	
			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	Q	E	X	V	U	
40	10	7.938 3.5x2	15000	41800	66	124	98	18	83	20	M6x1P	50.75	9	51	43	II
	12	9.525 3.5x2	18600	48200	70	156	103	18	86	20	M6x1P	58	9	55	45	II
45	10	7.938 3.5x2	15900	47300	70	134	104	18	87	20	M6x1P	54.2	9	54	45	II
	10	7.938 3.5x2	16700	52900	77	133	109	18	92	20	M6x1P	53.7	9	60	48	II
50	12.7	6x1	24800	63700	95	168	128	28	112	20	PT1/8"	70.5	9	32	60	I
	12.7	3.5x2	31200	83500	200	128	28	112	20	PT1/8"	86	9	72	62	II	
	20	12.7 3.5x2	31200	84800	95	235	128	28	112	20	PT1/8"	97	9	72	62	II
55	10	7.938 3.5x2	17500	58500	80	153	114	28	97	20	PT1/8"	62.1	9	61	49	II
	16	12.7 6x1	25800	71800	100	168	133	28	115	20	PT1/8"	69.5	9	32	63	I
	16	12.7 3.5x2	32600	94000	100	200	133	28	115	20	PT1/8"	84.5	9	77	64	II
63		6x1	27800	81700	105	168	138	28	122	25		65.25	9	32	66	I
	16	12.7 3.5x2	35000	107000	105	202	138	28	122	25	PT1/8"	82.25	9	80	67	II
		6x2	50300	164000	105	266	138	28	122	25		114.25	9	80	67	II
	20	15.875 2.5x2	35900	99300	117	210	157	32	137	25	PT1/8"	96	11	88	74	II
	20	15.875 3.5x2	46600	134700	117	246	157	32	137	25	PT1/8"	105.5	11	88	74	II
80		6x1	30900	104400	120	172	158	32	139	25		66	9	36	73	I
	16	12.7 3.5x2	39000	136700	120	205	158	32	139	25	PT1/8"	84	9	89	74	II
		6x2	56000	208700	120	275	158	32	139	25		122	9	89	74	II
		2.5x2	40100	127000	130	210	168	32	150	25		87.5	11	90	83	II
	20	15.875 3.5x2	52100	172400	130	250	168	32	150	25	PT1/8"	107.5	11	90	83	II
		6x2	75000	263200	130	330	168	32	150	30		147.5	11	108	94	II
	25	19.05 3.5x2	67700	206100	145	305	188	40	165	25	PT1/8"	119	11	108	94	II
		6x2	97200	314600	145	402	188	40	165	30		169	11	108	94	II

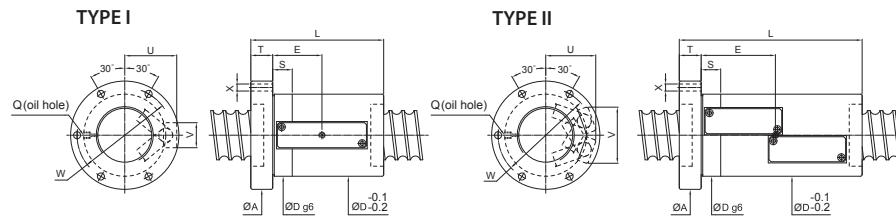

Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × row	BASIC RATE LOAD (kgf)		NUT		FLANGE			FIT	OIL HOLE		BOLT	RETURNTUB	Type	
			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	S	Q	E	X	V	U	
100	16	6x1	34200	133200	145	172	185	32	165	25	PT1/8"	63.5	11	38	85	I
		3.5x2	43200	174500	145	205	185	32	165	25	PT1/8"	79.5	11	98	85	II
	20	6x2	62000	266300	145	275	185	32	165	25		117.5	11	98	85	II
		2.5x2	44800	160900	150	205	194	32	172	30		82	11	107	92	II
	25	3.5x2	58300	218400	150	245	194	32	172	30	PT1/8"	102	11	107	92	II
		6x2	83800	333300	150	330	194	32	172	30		147	11	107	92	II
	32	3.5x2	74900	260200	165	305	218	40	190	30	PT1/8"	122	11	111	102	II
		6x2	107700	397100	165	410	218	40	190	30	PT1/8"	177	11	111	102	II
120	16	6x1	36840	157360	173	205	213	40	193	30	PT1/8"	84	11	38	93	I
		3.5x2	46480	206200	173	230	213	40	193	30	PT1/8"	101	11	108	94	II
	20	6x1	46000	160800	173	222	213	40	193	30	PT1/8"	95	11	54	100	I
		3.5x2	58100	210700	173	260	213	40	193	30	PT1/8"	116	11	121	104	II
	25	6x1	59200	194500	173	261	213	40	193	30	PT1/8"	109.5	11	50	106	I
		3.5x2	82100	314300	173	314	213	40	193	30	PT1/8"	135.5	11	129	109	II

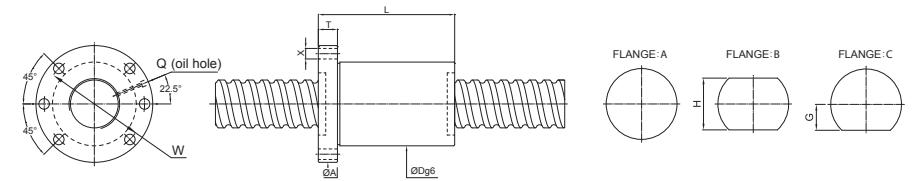


Unit:mm

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit × number of thread	BASIC RATE LOAD (kgf)		NUT		FLANGE			OIL HOLE	BOLT		
			Dynamic (1x10 ⁶ REV.) Ca	Static Co	Dg6	L	A	T	W	G	H	Q	X
45	12	9.525	5x1	13600	35400	84	98	128	24	106	57	114	PT1/8" 14
	16	9.525	5x1	13500	35300	84	122	128	24	106	57	114	PT1/8" 14
	20	9.525	4x1	11000	27900	84	122	128	24	106	57	114	PT1/8" 14
50	12	12.7	5x1	21100	53700	102	125	146	28	124	65	130	PT1/8" 14
	20	12.7	4x1	17200	42400	102	124	146	28	124	65	130	PT1/8" 14
	40	12.7	3x2	23400	61200	102	157	146	28	124	65	130	PT1/8" 14
63	32	15.875	4x1	25500	66000	126	176	182	32	154	81	162	PT1/8" 18
	40	15.875	3x2	35300	96600	126	169	182	32	154	81	162	PT1/8" 18
80	50	19.05	4x2	66600	204000	155	255	224	40	190	100	200	PT1/8" 22
100	60	19.05	4x2	73400	251500	175	295	244	40	210	100	200	PT1/8" 22

PMI Precision Ground BallScrew Miniature Series

Miniature Ballscrews
Screw Dia. Ø4 Lead01 **FSMC**

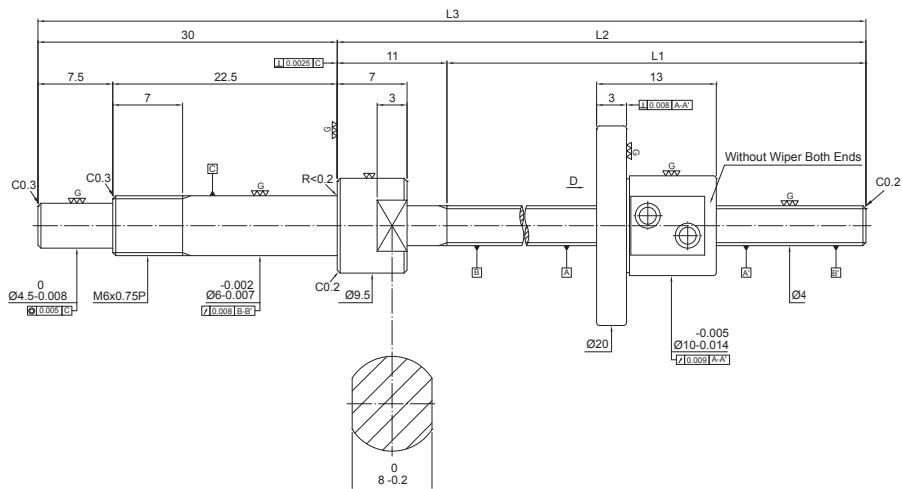


Specification of ball screw

Production Specification		With Preload	Without Preload
Number of Thread / Thread Direction			1/Right
BCD		4.1	
Lead		1	
Ball Dia.		0.8	
Effective Turns (Circuit × Row)		2.5 × 1	
Lead Angle		4.44	
Dynamic Rate Load Ca (kgf)		49	
Static Rate Load Co (kgf)		70	
Axial Play	0	0.005 or less	
Preloading Torque (kgf-cm)	0.01~0.1	0.03 or less	

Unit:mm

Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
FSM0401-C3-1R-0085	44	55	85	3	0	0.012	0.008
FSM0401-C3-1R-0105	64	75	105	3	0	0.012	0.008
FSM0401-C3-1R-0135	94	105	135	3	0	0.012	0.008

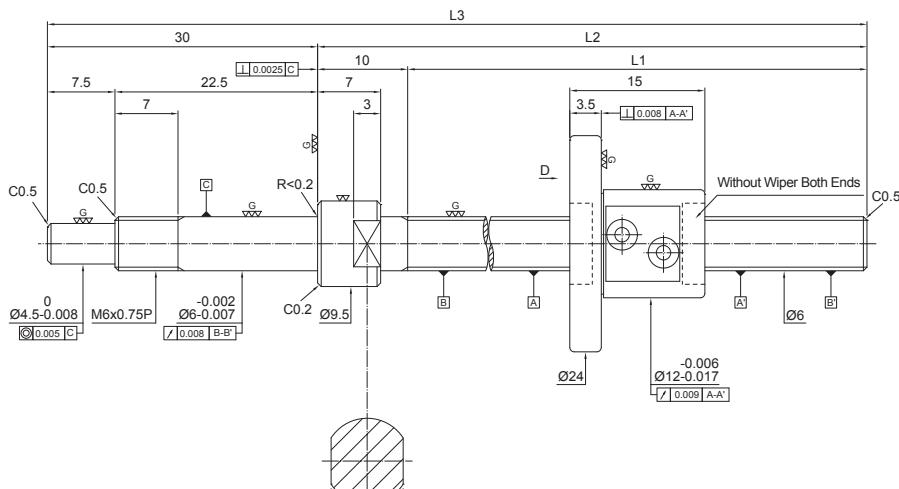


Specification of ball screw

Production Specification		With Preload	Without Preload
Number of Thread / Thread Direction			1/Right
BCD		6.1	
Lead		1	
Ball Dia.		0.8	
Effective Turns (Circuit × Row)		2.5 × 1	
Lead Angle		2.99	
Dynamic Rate Load Ca (kgf)		58	
Static Rate Load Co (kgf)		100	
Axial Play	0	0.005 or less	
Preloading Torque (kgf-cm)	0.01~0.15	0.03 or less	

Unit:mm


Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
FSM0601-C3-1R-0105	65	75	105	3	0	0.012	0.008
FSM0601-C3-1R-0135	95	105	135	3	0	0.012	0.008
FSM0601-C3-1R-0165	125	135	165	3	0	0.012	0.008

Miniature Ballscrews
Screw Dia. Ø6 Lead01 **FSMC**

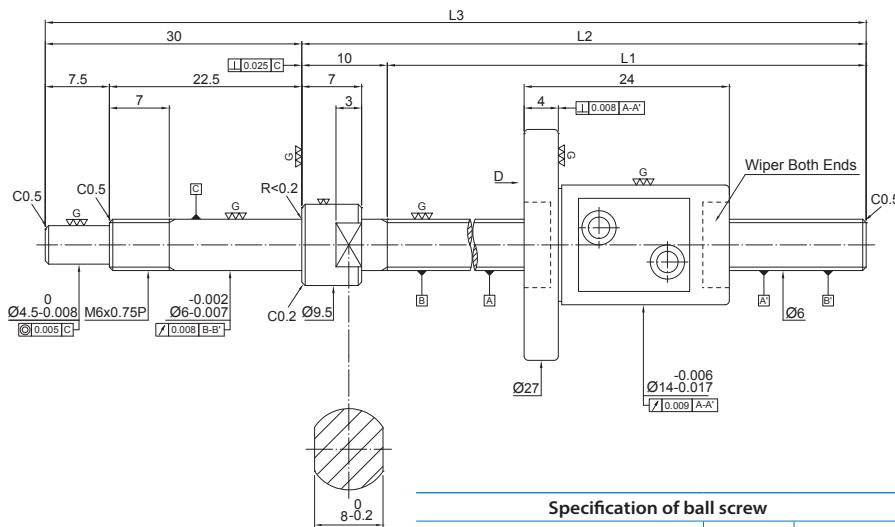

Specification of ball screw


Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	6.3	
Lead	2	
Ball Dia.	1.588	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	5.77	
Dynamic Rate Load Ca (kgf)	160	
Static Rate Load Co (kgf)	210	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.01~0.2	0.05 or less

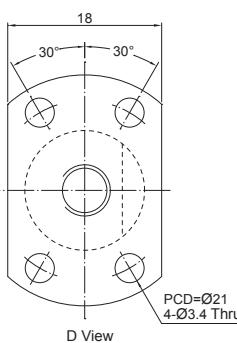

D View


Unit:mm

Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
FSM0602-C3-1R-0105	65	75	105	3	0	0.012	0.008
FSM0602-C3-1R-0135	95	105	135	3	0	0.012	0.008
FSM0602-C3-1R-0165	125	135	165	3	0	0.012	0.008

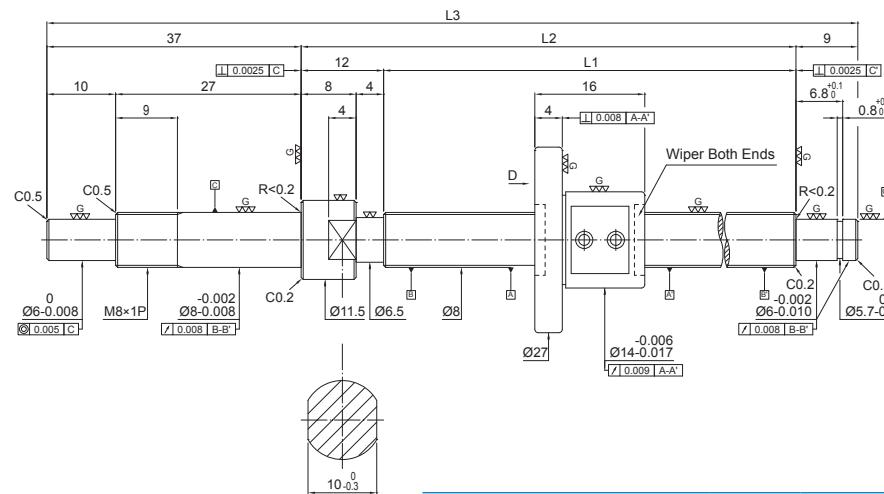

Specification of ball screw



Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	8.1	
Lead	1	
Ball Dia.	0.8	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	2.25	
Dynamic Rate Load Ca (kgf)	66	
Static Rate Load Co (kgf)	140	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.01~0.2	0.05 or less

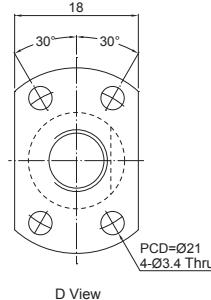

D View

Unit:mm



Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
FSM0801-C3-1R-0138	80	92	138	3	0	0.012	0.008
FSM0801-C3-1R-0168	110	122	168	3	0	0.012	0.008
FSM0801-C3-1R-0198	140	152	198	3	0	0.012	0.008
FSM0801-C3-1R-0248	190	202	248	3	0	0.012	0.008

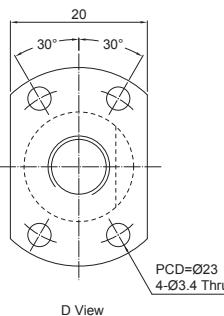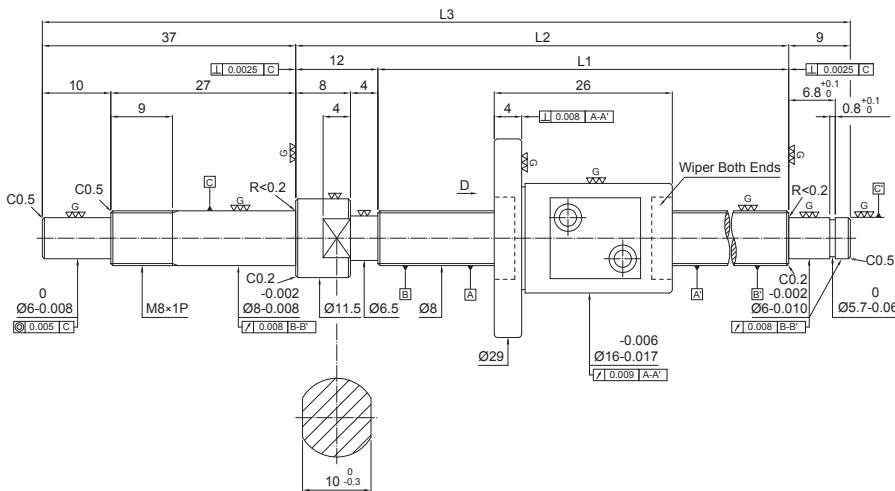

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	8.3	
Lead	2	
Ball Dia.	1.588	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	4.39	
Dynamic Rate Load Ca (kgf)	190	
Static Rate Load Co (kgf)	290	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.01~0.2	0.05 or less

Unit:mm



Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
FSM0802-C3-1R-0138	80	92	138	3	0	0.012	0.008
FSM0802-C3-1R-0168	110	122	168	3	0	0.012	0.008
FSM0802-C3-1R-0198	140	152	198	3	0	0.012	0.008
FSM0802-C3-1R-0248	190	202	248	3	0	0.012	0.008

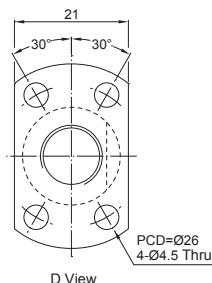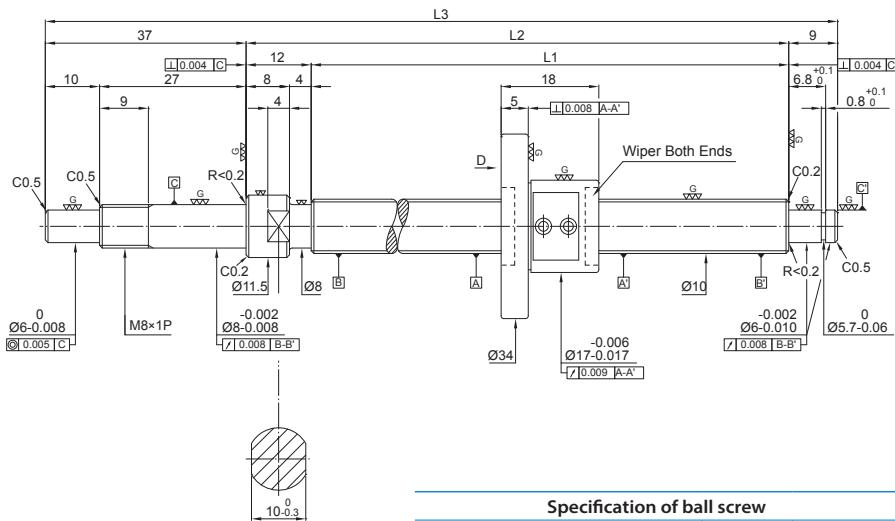

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	10.1	
Lead	1	
Ball Dia.	0.8	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	1.8	
Dynamic Rate Load Ca (kgf)	73	
Static Rate Load Co (kgf)	180	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.01~0.3	0.05 or less

Unit:mm



Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
FSM1001-C3-1R-0168	110	122	168	3	0	0.012	0.008
FSM1001-C3-1R-0218	160	172	218	3	0	0.012	0.008
FSM1001-C3-1R-0268	210	222	268	3	0	0.012	0.008
FSM1001-C3-1R-0318	260	272	318	3	0	0.012	0.008
FSM1001-C3-1R-0368	310	322	368	3	0	0.013	0.008

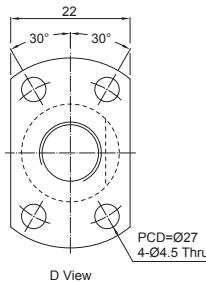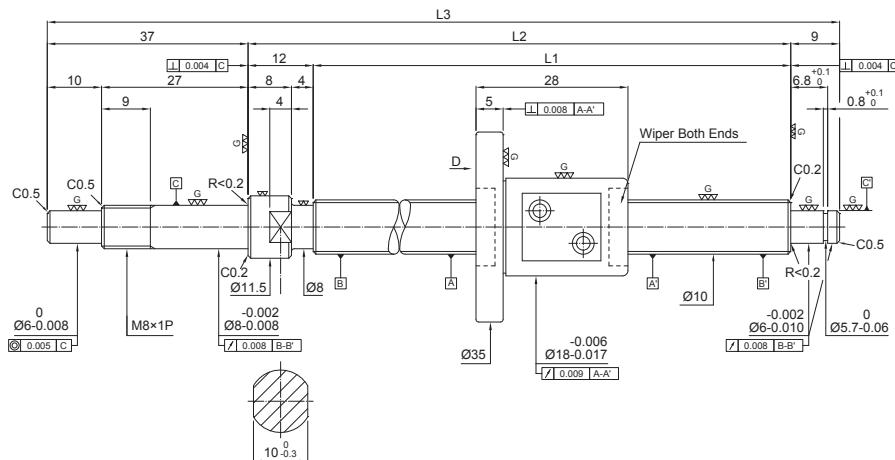

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	10.3	
Lead	2	
Ball Dia.	1.588	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	3.54	
Dynamic Rate Load Ca (kgf)	220	
Static Rate Load Co (kgf)	370	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.01~0.3	0.05 or less

Unit:mm


Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
FSM1002-C3-1R-0168	110	122	168	3	0	0.012	0.008
FSM1002-C3-1R-0218	160	172	218	3	0	0.012	0.008
FSM1002-C3-1R-0268	210	222	268	3	0	0.012	0.008
FSM1002-C3-1R-0318	260	272	318	3	0	0.012	0.008
FSM1002-C3-1R-0368	310	322	368	3	0	0.012	0.008

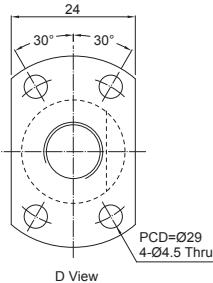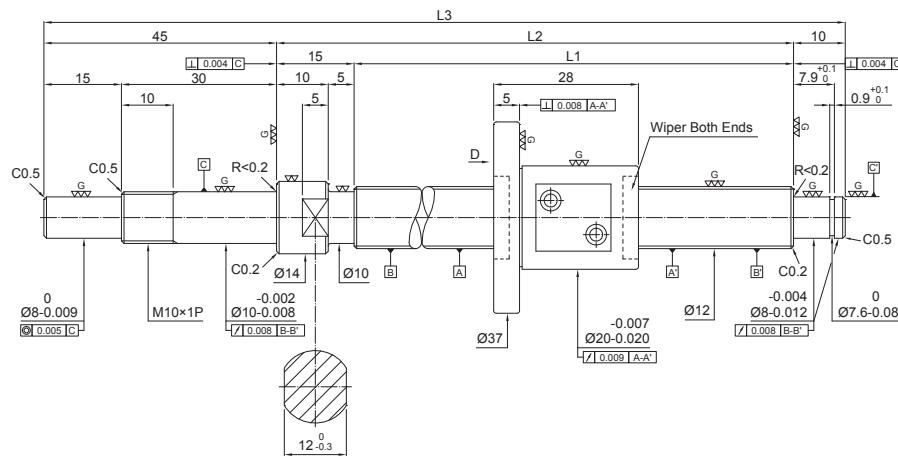

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	12.3	
Lead	2	
Ball Dia.	1.588	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	2.96	
Dynamic Rate Load Ca (kgf)	240	
Static Rate Load Co (kgf)	450	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.04~0.4	0.1 or less

Unit:mm

Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
FSM1202-C3-1R-0180	110	125	180	3	0	0.012	0.008
FSM1202-C3-1R-0230	160	175	230	3	0	0.012	0.008
FSM1202-C3-1R-0280	210	225	280	3	0	0.012	0.008
FSM1202-C3-1R-0330	260	275	330	3	0	0.012	0.008
FSM1202-C3-1R-0380	310	325	380	3	0	0.012	0.008

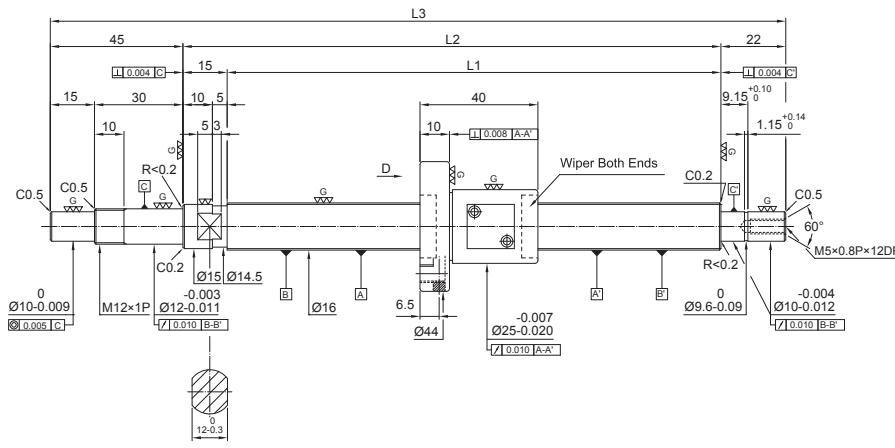


Specification of ball screw

Production Specification		With Preload	Without Preload
Number of Thread / Thread Direction	1/Right		
BCD	16.3		
Lead	2		
Ball Dia.	1.588		
Effective Turns (Circuit x Row)	3.5 × 1		
Lead Angle	2.24		
Dynamic Rate Load Ca (kgf)	360		
Static Rate Load Co (kgf)	850		
Axial Play	0	0.005 or less	
Preloading Torque (kgf-cm)	0.05~0.5	0.15 or less	

Unit: mm

Model No.	Screw Spindle (Shaft) Length			Accuracy Grade	Lead Accuracy		
	L1	L2	L3		Specified Travel (T)	Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
FSM1602-C3-1R-0221	139	154	221	3	0	0.012	0.008
FSM1602-C3-1R-0271	189	204	271	3	0	0.012	0.008
FSM1602-C3-1R-0321	239	254	321	3	0	0.012	0.008
FSM1602-C3-1R-0371	289	304	371	3	0	0.012	0.008
FSM1602-C3-1R-0471	389	404	471	3	0	0.013	0.008


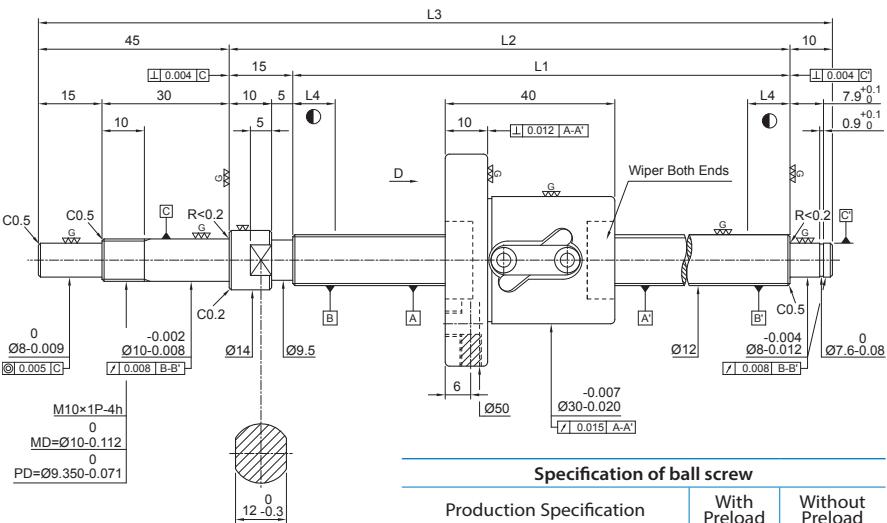


Specification of ball screw

Production Specification		With Preload	Without Preload
Number of Thread / Thread Direction	1/Right		
BCD	12.4		
Lead	5		
Ball Dia.	2.381		
Effective Turns (Circuit x Row)	2.5 × 1		
Lead Angle	7.31		
Dynamic Rate Load Ca (kgf)	380		
Static Rate Load Co (kgf)	640		
Axial Play	0	0.005 or less	
Preloading Torque (kgf-cm)	0.01~0.45	0.1 or less	

Unit: mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R12-05B1-1FSWC-110-180-0.008	110	125	180	10	3	0.012	0.008
1R12-05B1-1FSWC-160-230-0.008	160	175	230	10	3	0.012	0.008
1R12-05B1-1FSWC-210-280-0.008	210	225	280	10	3	0.012	0.008
1R12-05B1-1FSWC-260-330-0.008	260	275	330	10	3	0.012	0.008
1R12-05B1-1FSWC-310-380-0.008	310	325	380	10	3	0.012	0.008
1R12-05B1-1FSWC-410-480-0.008	410	425	480	15	3	0.013	0.008
1R12-05B1-1FSWC-510-580-0.008	510	525	580	15	3	0.015	0.008

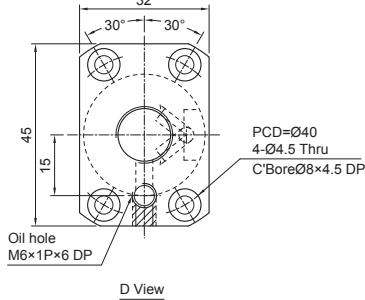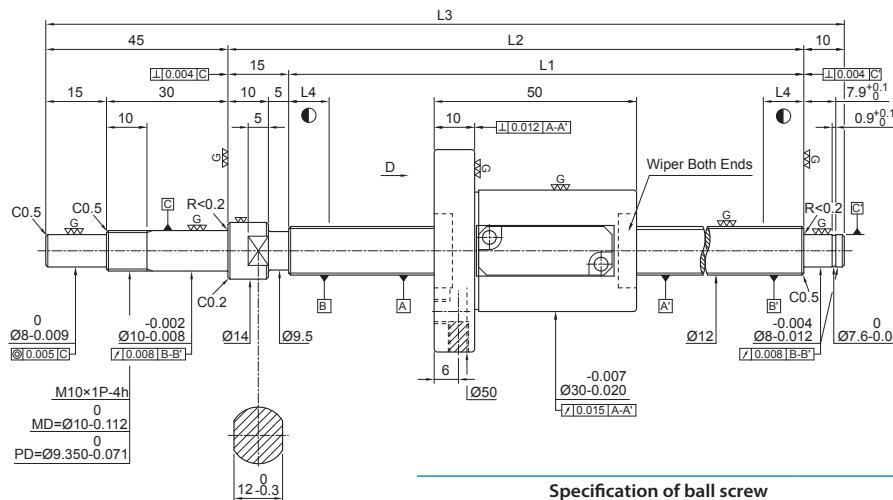FSWC Standard ball screws
Screw Dia.Ø12 Lead10


Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	12.4	
Lead	10	
Ball Dia.	2.381	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	14.4	
Dynamic Rate Load Ca (kgf)	420	
Static Rate Load Co (kgf)	720	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.1~0.5	0.1 or less

單位:mm


Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R12-10B1-1FSWE-160-230-0.008	160	175	230	10	3	0.012	0.008
1R12-10B1-1FSWE-210-280-0.008	210	225	280	10	3	0.012	0.008
1R12-10B1-1FSWE-310-380-0.008	310	325	380	15	3	0.012	0.008
1R12-10B1-1FSWE-410-480-0.008	410	425	480	15	3	0.013	0.008
1R12-10B1-1FSWE-510-580-0.008	510	525	580	15	3	0.015	0.008

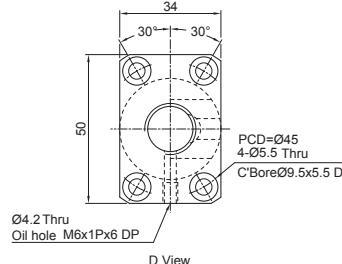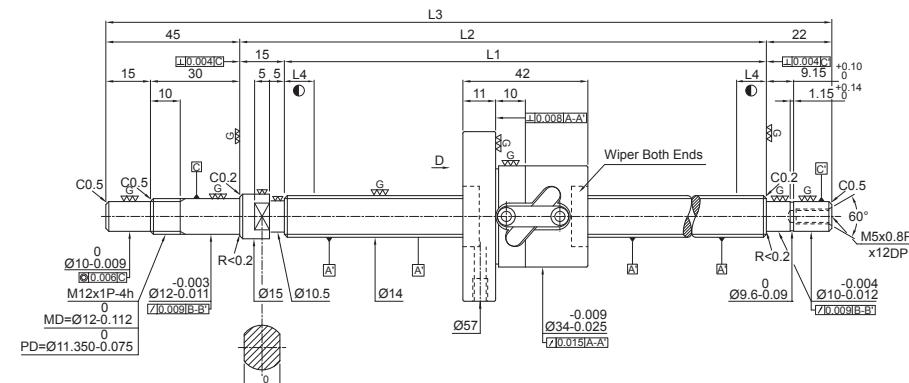FSWC Standard ball screws
Screw Dia.Ø14 Lead05


Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	14.6	
Lead	5	
Ball Dia.	3.175	
Effective Turns (Circuit × Row)	2.5 × 1	
Lead Angle	6.22	
Dynamic Rate Load Ca (kgf)	675	
Static Rate Load Co (kgf)	1145	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.15~0.7	0.2 or less

Unit:mm


Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R14-05B1-1FSWC-189-271-0.008	189	204	271	10	3	0.012	0.008
1R14-05B1-1FSWC-239-321-0.008	239	254	321	10	3	0.012	0.008
1R14-05B1-1FSWC-339-421-0.008	339	354	421	15	3	0.012	0.008
1R14-05B1-1FSWC-439-521-0.008	439	454	521	15	3	0.012	0.008
1R14-05B1-1FSWC-539-621-0.008	539	554	621	15	3	0.012	0.008
1R14-05B1-1FSWC-689-771-0.008	689	704	771	15	3	0.013	0.008

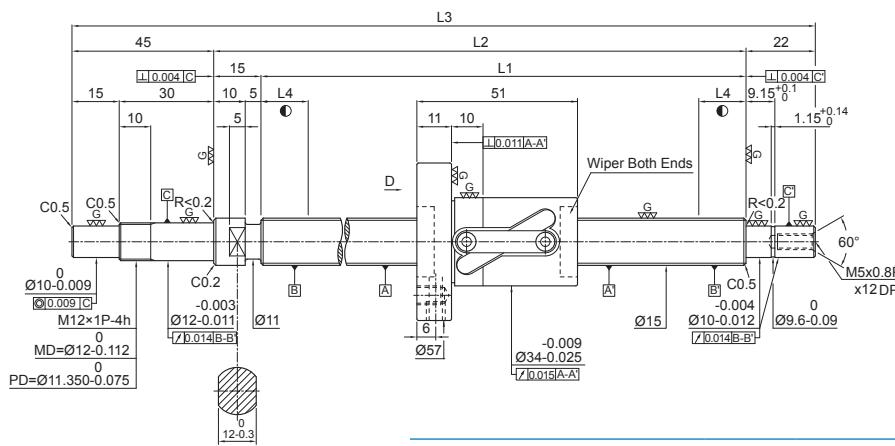

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	15.6	
Lead	10	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	2.5 × 1	
Lead Angle	11.53	
Dynamic Rate Load Ca (kgf)	680	
Static Rate Load Co (kgf)	1210	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.1~0.79	0.24 or less

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R15-10B1-1FSWC-189-271-0.018	189	204	271	10	5	0.023	0.018
1R15-10B1-1FSWC-239-321-0.018	239	254	321	10	5	0.023	0.018
1R15-10B1-1FSWC-289-371-0.018	289	304	371	15	5	0.023	0.018
1R15-10B1-1FSWC-339-421-0.018	339	354	421	15	5	0.023	0.018
1R15-10B1-1FSWC-389-471-0.018	389	404	471	15	5	0.025	0.018
1R15-10B1-1FSWC-439-521-0.018	439	454	521	15	5	0.025	0.018
1R15-10B1-1FSWC-489-571-0.018	489	504	571	15	5	0.027	0.018

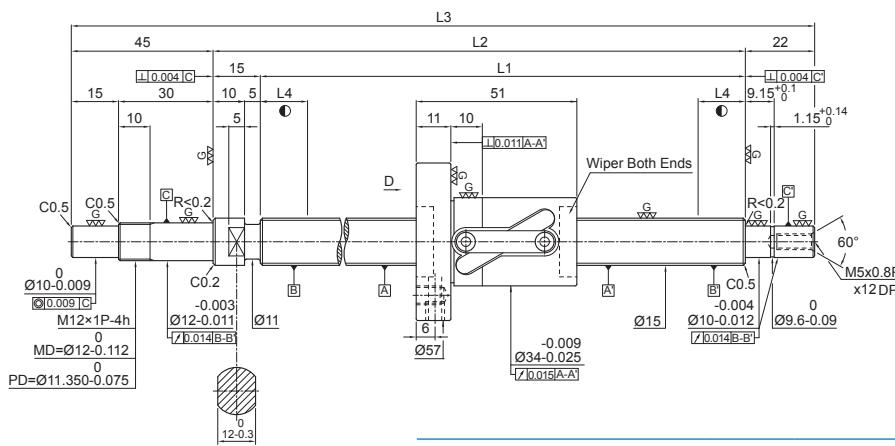


Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	15.6	
Lead	10	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	2.5 × 1	
Lead Angle	11.53	
Dynamic Rate Load Ca (kgf)	680	
Static Rate Load Co (kgf)	1210	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.1~0.79	0.24 or less

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R15-10B1-1FSWC-539-621-0.018	539	554	621	15	5	0.027	0.018
1R15-10B1-1FSWC-589-671-0.018	589	604	671	15	5	0.030	0.018
1R15-10B1-1FSWC-639-721-0.018	639	654	721	15	5	0.030	0.018
1R15-10B1-1FSWC-689-771-0.018	689	704	771	15	5	0.035	0.018
1R15-10B1-1FSWC-789-871-0.018	789	804	871	15	5	0.035	0.018
1R15-10B1-1FSWC-889-971-0.018	889	904	971	15	5	0.040	0.018
1R15-10B1-1FSWC-1089-1171-0.018	1089	1104	1171	15	5	0.046	0.018

Unit:mm

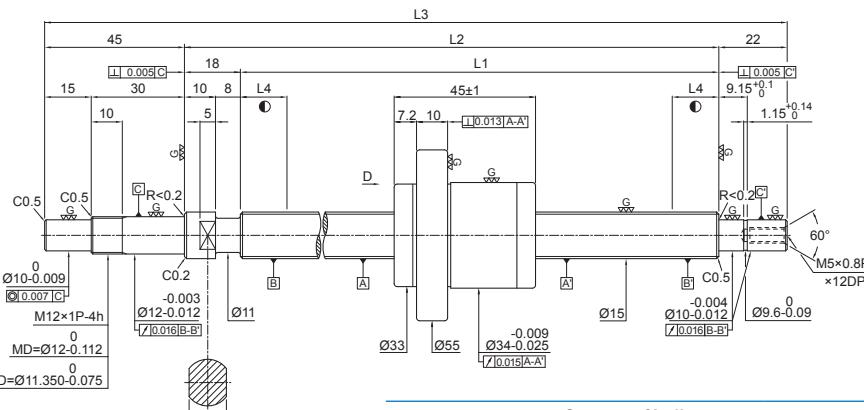


Specification of ball screw

Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	15.6	
Lead	20	
Ball Dia.	3.175	
Effective Turns (Circuit × Row)	1.8 × 1	
Lead Angle	22.2	
Dynamic Rate Load Ca (kgf)	780	
Static Rate Load Co (kgf)	1400	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.15~0.8	0.24 or less

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R15-20A1-1FSKC-186-271-0.018	186	204	271	10	5	0.023	0.018
1R15-20A1-1FSKC-236-321-0.018	236	254	321	10	5	0.023	0.018
1R15-20A1-1FSKC-286-371-0.018	286	304	371	15	5	0.023	0.018
1R15-20A1-1FSKC-336-421-0.018	336	354	421	15	5	0.023	0.018
1R15-20A1-1FSKC-386-471-0.018	386	404	471	15	5	0.025	0.018
1R15-20A1-1FSKC-436-521-0.018	436	454	521	15	5	0.025	0.018
1R15-20A1-1FSKC-486-571-0.018	486	504	571	15	5	0.027	0.018


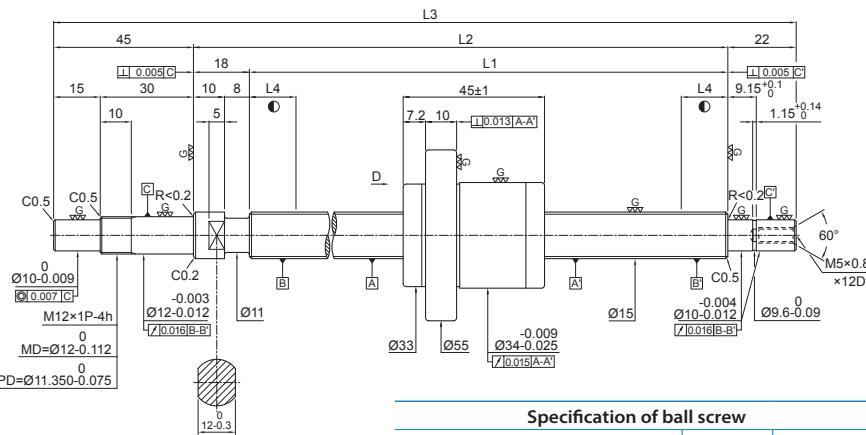


Specification of ball screw

Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	15.6	
Lead	20	
Ball Dia.	3.175	
Effective Turns (Circuit × Row)	1.8 × 1	
Lead Angle	22.2	
Dynamic Rate Load Ca (kgf)	780	
Static Rate Load Co (kgf)	1400	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.15~0.8	0.24 or less

Unit:mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R15-20A1-1FSKC-536-621-0.018	536	554	621	15	5	0.027	0.018
1R15-20A1-1FSKC-586-671-0.018	586	604	671	15	5	0.030	0.018
1R15-20A1-1FSKC-636-721-0.018	636	654	721	15	5	0.030	0.018
1R15-20A1-1FSKC-686-771-0.018	686	704	771	15	5	0.030	0.018
1R15-20A1-1FSKC-786-871-0.018	786	804	871	15	5	0.035	0.018
1R15-20A1-1FSKC-886-971-0.018	886	904	971	15	5	0.040	0.018
1R15-20A1-1FSKC-1086-1171-0.018	1086	1104	1171	15	5	0.046	0.018

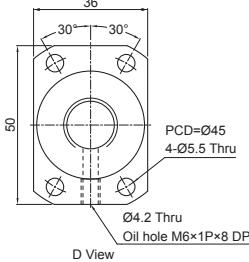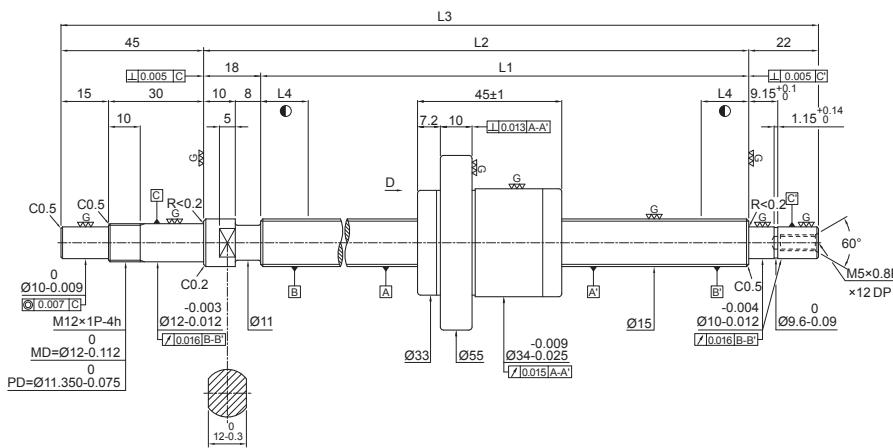FSKC Standard ballscrews
Screw Dia.Ø15 Lead20


Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	2/Right	
BCD	15.6	
Lead	20	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	1.8 x 2	
Lead Angle	22.2	
Dynamic Rate Load Ca (kgf)	1400	
Static Rate Load Co (kgf)	2800	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.2~0.9	-

Unit:mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
2R15-20A1-1FSKC-236-321-0.018	236	254	321	10	5	0.023	0.018
2R15-20A1-1FSKC-286-371-0.018	286	304	371	10	5	0.023	0.018
2R15-20A1-1FSKC-336-421-0.018	336	354	421	15	5	0.023	0.018
2R15-20A1-1FSKC-386-471-0.018	386	404	471	15	5	0.025	0.018
2R15-20A1-1FSKC-436-521-0.018	436	454	521	15	5	0.025	0.018
2R15-20A1-1FSKC-486-571-0.018	486	504	571	15	5	0.027	0.018

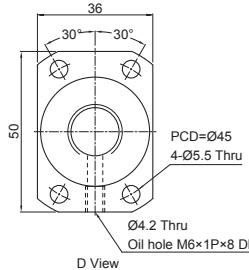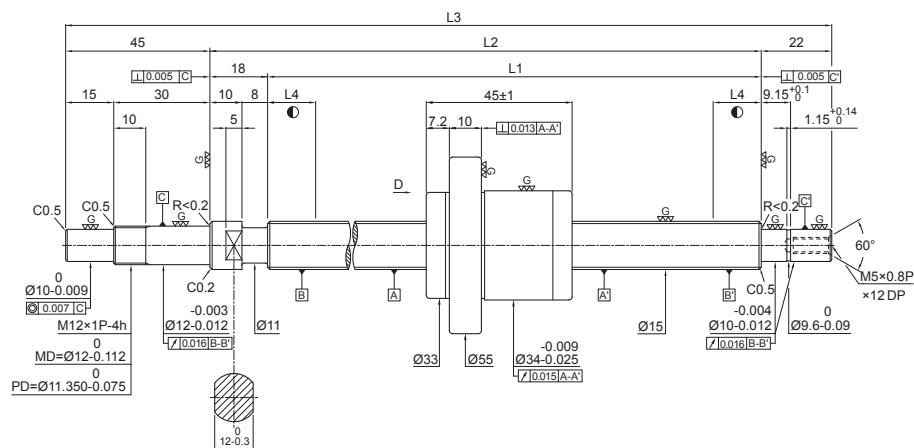

Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	2/Right	
BCD	15.6	
Lead	20	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	1.8 x 2	
Lead Angle	22.2	
Dynamic Rate Load Ca (kgf)	1400	
Static Rate Load Co (kgf)	2800	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.2~0.9	-

Unit:mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
2R15-20A1-1FSKC-536-621-0.018	536	554	621	15	5	0.027	0.018
2R15-20A1-1FSKC-586-671-0.018	586	604	671	15	5	0.030	0.018
2R15-20A1-1FSKC-636-721-0.018	636	654	721	15	5	0.030	0.018
2R15-20A1-1FSKC-686-771-0.018	686	704	771	15	5	0.030	0.018
2R15-20A1-1FSKC-786-871-0.018	786	804	871	15	5	0.035	0.018
2R15-20A1-1FSKC-886-971-0.018	886	904	971	15	5	0.040	0.018

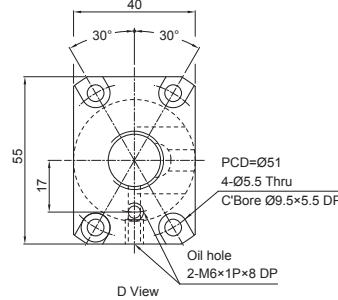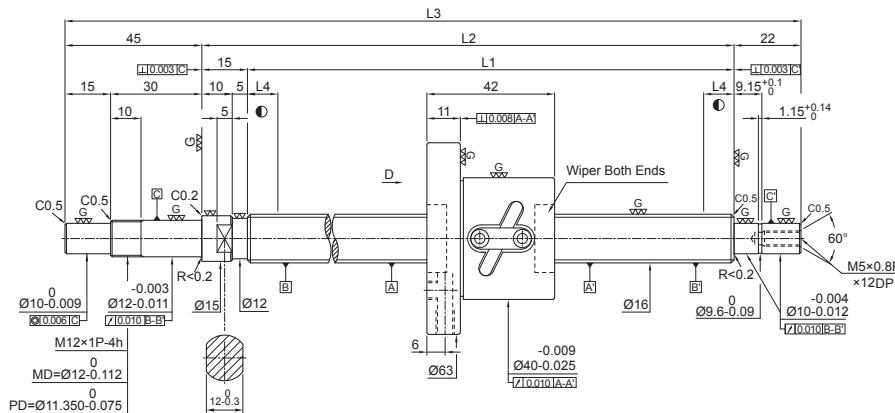FSWC Standard ball screws
Screw Dia.Ø16 Lead05


Specification of ball screw		
Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	16.6	
Lead	5	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	2.5 × 1	
Lead Angle	5.48	
Dynamic Rate Load Ca (kgf)	690	
Static Rate Load Co (kgf)	1270	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.15~0.8	0.2 or less

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R16-05B1-1FSWC-189-271-0.018	189	204	271	10	5	0.023	0.018
1R16-05B1-1FSWC-289-371-0.018	289	304	371	10	5	0.023	0.018
1R16-05B1-1FSWC-389-471-0.018	389	404	471	15	5	0.025	0.018
1R16-05B1-1FSWC-489-571-0.018	489	504	571	15	5	0.027	0.018
1R16-05B1-1FSWC-689-771-0.018	689	704	771	15	5	0.035	0.018
1R16-05B1-1FSWC-889-971-0.018	889	904	971	15	5	0.040	0.018

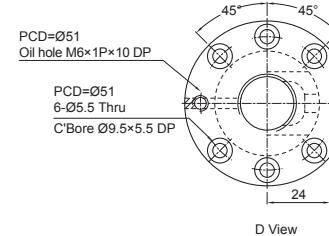
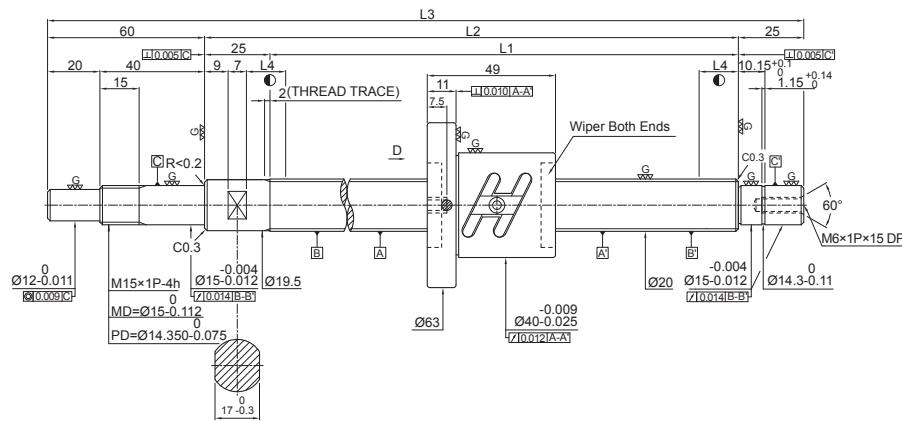


Specification of ball screw		
Production Specification	With Preload	
Number of Thread / Thread Direction	1/Right	
BCD	20.4	
Lead	4	
Ball Dia.	2.381	
Effective Turns (Circuit x Row)	2.5 × 2	
Lead Angle	3.57	
Dynamic Rate Load Ca (kgf)	820	
Static Rate Load Co (kgf)	2110	
Axial Play	0	
Preloading Torque (kgf-cm)	0.12~0.68	

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R20-04B2-1FSWC-225-335-0.018	225	250	335	10	5	0.023	0.018
1R20-04B2-1FSWC-275-385-0.018	275	300	385	10	5	0.023	0.018
1R20-04B2-1FSWC-375-485-0.018	375	400	485	15	5	0.025	0.018
1R20-04B2-1FSWC-475-585-0.018	475	500	585	15	5	0.027	0.018
1R20-04B2-1FSWC-575-685-0.018	575	600	685	15	5	0.030	0.018
1R20-04B2-1FSWC-675-785-0.018	675	700	785	15	5	0.035	0.018

A1-209

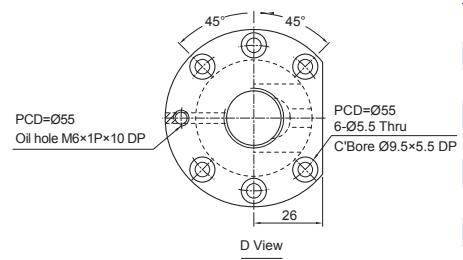
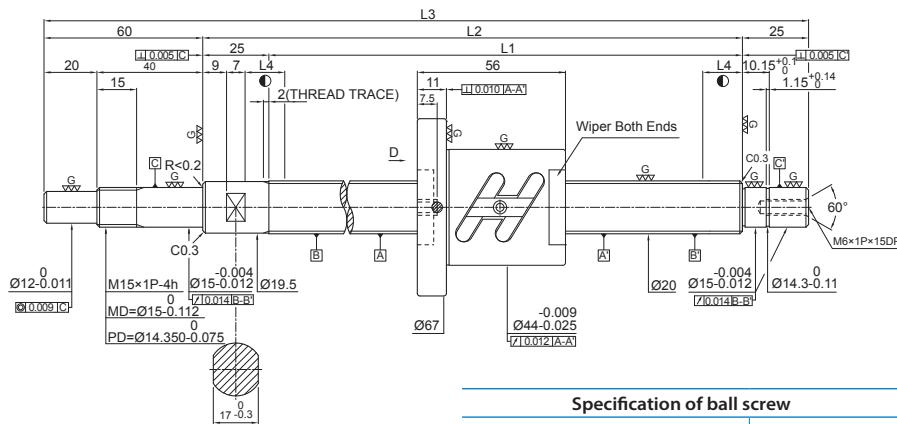


Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	20.6
Lead	5
Ball Dia.	3.175
Effective Turns (Circuit x Row)	2.5 x 2
Lead Angle	4.42
Dynamic Rate Load Ca (kgf)	1510
Static Rate Load Co (kgf)	3460
Axial Play	0
Preloading Torque (kgf-cm)	0.28~1.32

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R20-05B2-1FSWC-225-335-0.018	225	250	335	10	5	0.023	0.018
1R20-05B2-1FSWC-275-385-0.018	275	300	385	10	5	0.023	0.018
1R20-05B2-1FSWC-375-485-0.018	375	400	485	15	5	0.025	0.018
1R20-05B2-1FSWC-475-585-0.018	475	500	585	15	5	0.027	0.018
1R20-05B2-1FSWC-575-685-0.018	575	600	685	15	5	0.030	0.018
1R20-05B2-1FSWC-775-885-0.018	775	800	885	10	5	0.035	0.018

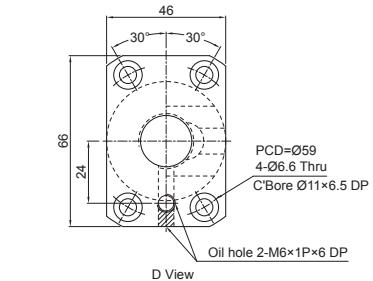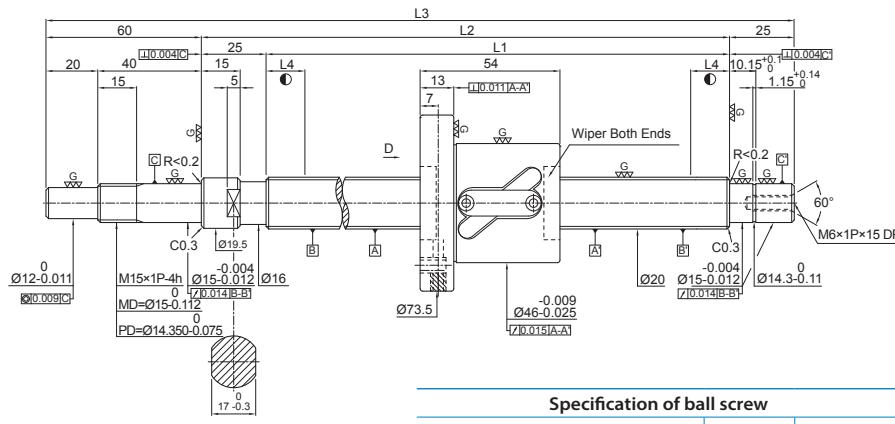


Specification of ball screw

Production Specification	With Preload	Without Preload
Number of Thread / Thread Direction	1/Right	
BCD	20.7	
Lead	10	
Ball Dia.	3.969	
Effective Turns (Circuit x Row)	2.5 x 1	
Lead Angle	8.74	
Dynamic Rate Load Ca (kgf)	1100	
Static Rate Load Co (kgf)	2120	
Axial Play	0	0.005 or less
Preloading Torque (kgf-cm)	0.36~1.44	0.3 or less


Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R20-10B1-1FSWC-289-399-0.018	289	314	399	10	5	0.023	0.018
1R20-10B1-1FSWC-389-499-0.018	389	414	499	10	5	0.025	0.018
1R20-10B1-1FSWC-489-599-0.018	489	514	599	15	5	0.027	0.018
1R20-10B1-1FSWC-589-699-0.018	589	614	699	15	5	0.030	0.018
1R20-10B1-1FSWC-689-799-0.018	689	714	799	15	5	0.035	0.018
1R20-10B1-1FSWC-789-899-0.018	789	814	899	15	5	0.035	0.018
1R20-10B1-1FSWC-889-999-0.018	889	914	999	15	5	0.040	0.018
1R20-10B1-1FSWC-989-1099-0.018	989	1014	1099	15	5	0.040	0.018
1R20-10B1-1FSWC-1089-1199-0.018	1089	1114	1199	15	5	0.046	0.018
1R20-10B1-1FSWC-1189-1299-0.018	1189	1214	1299	15	5	0.046	0.018
1R20-10B1-1FSWC-1289-1399-0.018	1289	1314	1399	15	5	0.046	0.018

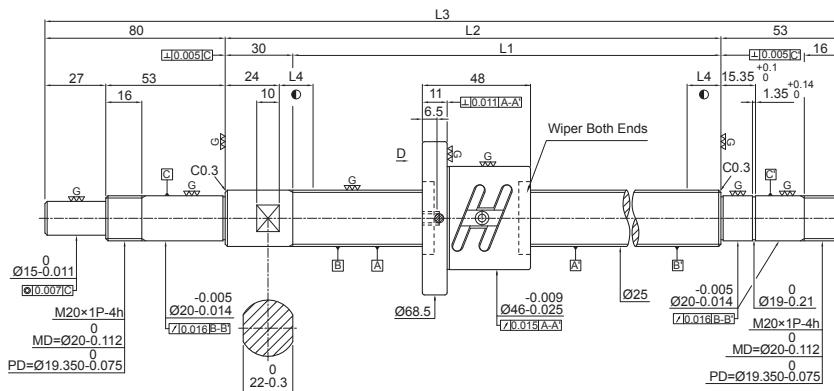


Specification of ball screw

Production Specification		With Preload
Number of Thread / Thread Direction		1/Right
BCD	25.4	
Lead	4	
Ball Dia.	2.381	
Effective Turns (Circuit × Row)	2.5 × 2	
Lead Angle	2.87	
Dynamic Rate Load Ca (kgf)	930	
Static Rate Load Co (kgf)	2710	
Axial Play	0	
Preloading Torque (kgf-cm)	0.15~0.85	

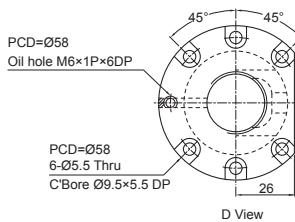


Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R25-04B2-1FSWC-220-383-0.018	220	250	383	10	5	0.023	0.018
1R25-04B2-1FSWC-270-433-0.018	270	300	433	10	5	0.023	0.018
1R25-04B2-1FSWC-370-533-0.018	370	400	533	15	5	0.025	0.018
1R25-04B2-1FSWC-470-633-0.018	470	500	633	15	5	0.027	0.018
1R25-04B2-1FSWC-570-733-0.018	570	600	733	15	5	0.030	0.018
1R25-04B2-1FSWC-770-933-0.018	770	800	933	10	5	0.035	0.018

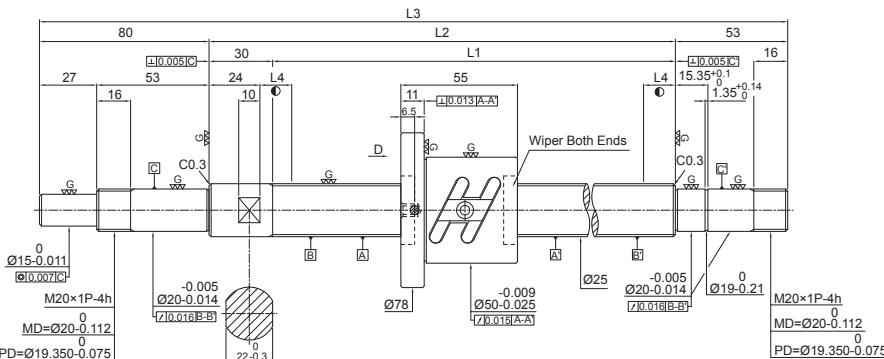



Specification of ball screw

Production Specification		With Preload	Without Preload
Number of Thread / Thread Direction		1/Right	
BCD	25.6		
Lead	5		
Ball Dia.	3.175		
Effective Turns (Circuit × Row)	2.5 × 2		
Lead Angle	3.55		
Dynamic Rate Load Ca (kgf)	1650		
Static Rate Load Co (kgf)	4300		
Axial Play	0	0.005 or less	
Preloading Torque (kgf-cm)	0.36~1.44	0.3 or less	

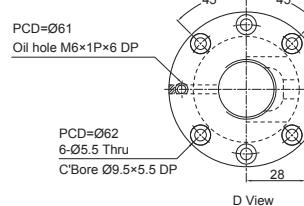

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R25-05B2-1FSWC-220-383-0.018	220	250	383	10	5	0.023	0.018
1R25-05B2-1FSWC-270-433-0.018	270	300	433	10	5	0.023	0.018
1R25-05B2-1FSWC-370-533-0.018	370	400	533	15	5	0.025	0.018
1R25-05B2-1FSWC-470-633-0.018	470	500	633	15	5	0.027	0.018
1R25-05B2-1FSWC-570-733-0.018	570	600	733	15	5	0.030	0.018
1R25-05B2-1FSWC-670-833-0.018	670	700	833	15	5	0.030	0.018
1R25-05B2-1FSWC-770-933-0.018	770	800	933	15	5	0.035	0.018
1R25-05B2-1FSWC-970-1133-0.018	970	1000	1133	15	5	0.040	0.018
1R25-05B2-1FSWC-1170-1333-0.018	1170	1200	1333	15	5	0.046	0.018

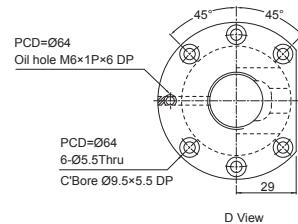
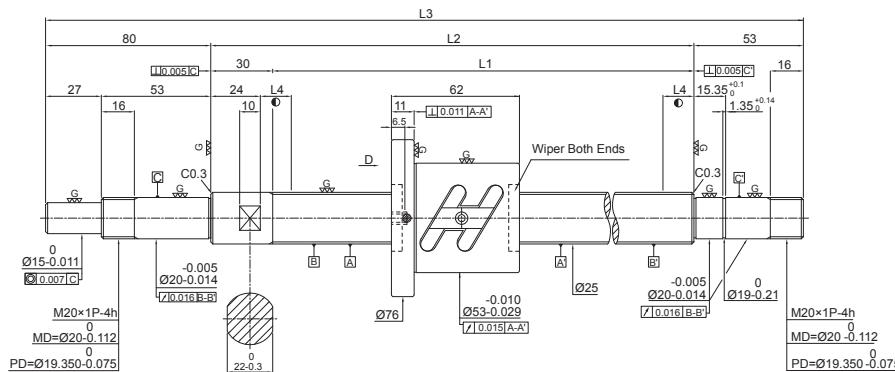


Specification of ball screw

Production Specification		With Preload
Number of Thread / Thread Direction	1/Right	
BCD	25.7	
Lead	6	
Ball Dia.	3.969	
Effective Turns (Circuit × Row)	2.5 × 2	
Lead Angle	4.25	
Dynamic Rate Load Ca (kgf)	2190	
Static Rate Load Co (kgf)	5360	
Axial Play	0	
Preloading Torque (kgf-cm)	0.42~2.4	

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R25-06B2-1FSWC-370-533-0.018	370	400	533	15	5	0.025	0.018
1R25-06B2-1FSWC-570-733-0.018	570	600	733	15	5	0.030	0.018
1R25-06B2-1FSWC-770-933-0.018	770	800	933	15	5	0.035	0.018
1R25-06B2-1FSWC-1170-1333-0.018	1170	1200	1333	15	5	0.046	0.018

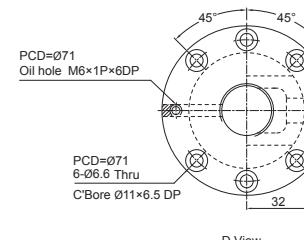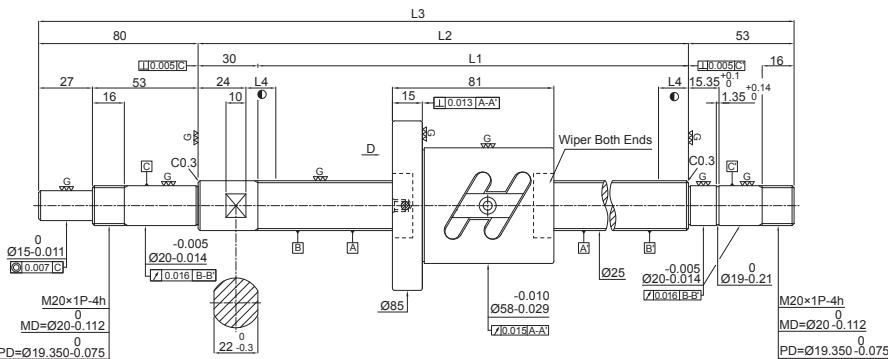


Specification of ball screw

Production Specification		With Preload
Number of Thread / Thread Direction	1/Right	
BCD	26	
Lead	10	
Ball Dia.	4.762	
Effective Turns (Circuit × Row)	1.5 × 2	
Lead Angle	6.98	
Dynamic Rate Load Ca (kgf)	1820	
Static Rate Load Co (kgf)	3840	
Axial Play	0	
Preloading Torque (kgf-cm)	0.42~2.4	

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R25-10A2-1FSWC-370-533-0.018	370	400	533	10	5	0.025	0.018
1R25-10A2-1FSWC-570-733-0.018	570	600	733	10	5	0.030	0.018
1R25-10A2-1FSWC-770-933-0.018	770	800	933	15	5	0.035	0.018
1R25-10A2-1FSWC-970-1133-0.018	970	1000	1133	15	5	0.040	0.018
1R25-10A2-1FSWC-1170-1333-0.018	1170	1200	1333	15	5	0.046	0.018
1R25-10A2-1FSWC-1470-1633-0.018	1470	1500	1633	15	5	0.054	0.018

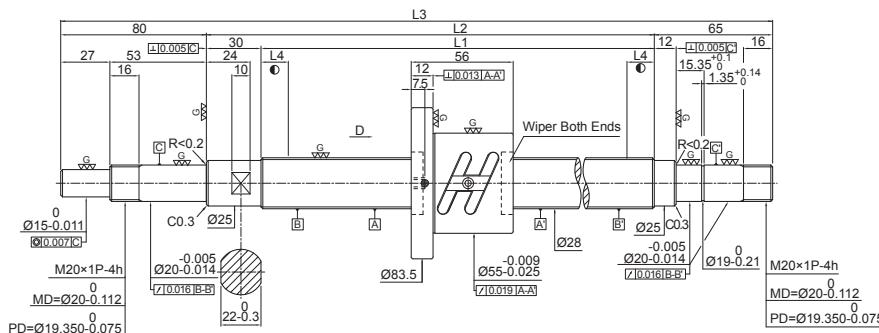


Specification of ball screw

Production Specification		With Preload
Number of Thread / Thread Direction	1/Right	
BCD	28.6	
Lead	5	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	2.5 x 2	
Lead Angle	3.19	
Dynamic Rate Load Ca (kgf)	1720	
Static Rate Load Co (kgf)	4940	
Axial Play	0	
Preloading Torque (kgf-cm)	0.3~1.7	

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e₃₀₀
1R28-05B2-1FSWC-270-445-0.018	270	300	445	10	5	0.023	0.018
1R28-05B2-1FSWC-370-545-0.018	370	400	545	15	5	0.023	0.018
1R28-05B2-1FSWC-470-645-0.018	470	500	645	15	5	0.023	0.018
1R28-05B2-1FSWC-558-733-0.018	558	588	733	15	5	0.023	0.018
1R28-05B2-1FSWC-758-933-0.018	758	788	933	15	5	0.025	0.018
1R28-05B2-1FSWC-958-1133-0.018	958	988	1133	15	5	0.025	0.018
1R28-05B2-1FSWC-1158-1333-0.018	1158	1188	1333	15	5	0.027	0.018


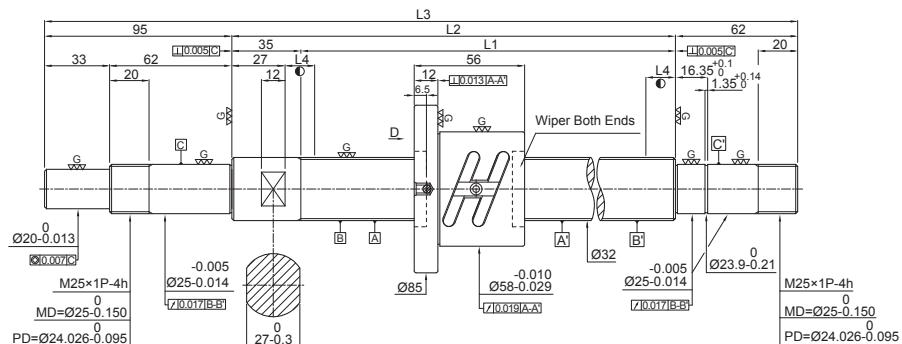


Specification of ball screw

Production Specification		With Preload
Number of Thread / Thread Direction	1/Right	
BCD	32.6	
Lead	5	
Ball Dia.	3.175	
Effective Turns (Circuit x Row)	2.5 x 2	
Lead Angle	2.79	
Dynamic Rate Load Ca (kgf)	1830	
Static Rate Load Co (kgf)	5680	
Axial Play	0	
Preloading Torque (kgf-cm)	0.48~1.92	

Unit:mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e₃₀₀
1R32-05B2-1FSWC-265-457-0.018	265	300	457	10	5	0.023	0.018
1R32-05B2-1FSWC-365-557-0.018	365	400	557	15	5	0.025	0.018
1R32-05B2-1FSWC-465-657-0.018	465	500	657	15	5	0.027	0.018
1R32-05B2-1FSWC-565-757-0.018	565	600	757	15	5	0.030	0.018
1R32-05B2-1FSWC-665-857-0.018	665	700	857	15	5	0.030	0.018
1R32-05B2-1FSWC-765-957-0.018	765	800	957	15	5	0.035	0.018
1R32-05B2-1FSWC-965-1157-0.018	965	1000	1157	15	5	0.040	0.018
1R32-05B2-1FSWC-1165-1357-0.018	1165	1200	1357	15	5	0.046	0.018
1R32-05B2-1FSWC-1465-1657-0.018	1465	1500	1657	15	5	0.054	0.018

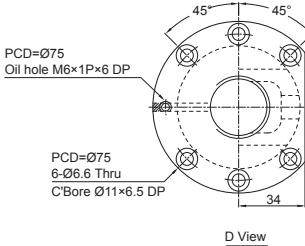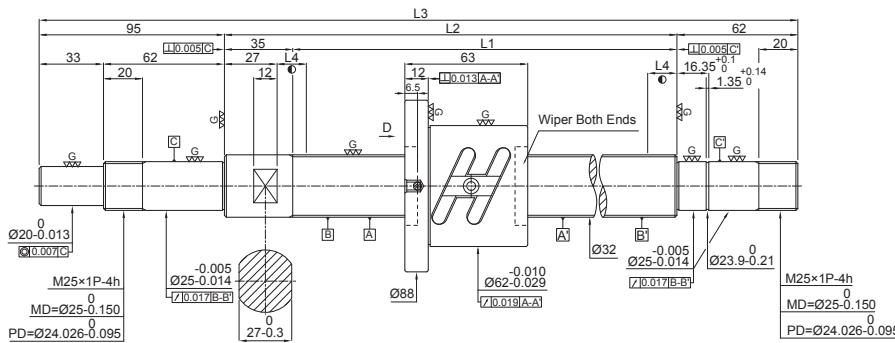

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	32.7
Lead	6
Ball Dia.	3.969
Effective Turns (Circuit × Row)	2.5 × 2
Lead Angle	3.34
Dynamic Rate Load Ca (kgf)	2410
Static Rate Load Co (kgf)	6900
Axial Play	0
Preloading Torque (kgf-cm)	0.48~2.72

Unit:mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R32-06B2-1FSWC-365-557-0.018	365	400	557	15	5	0.025	0.018
1R32-06B2-1FSWC-565-757-0.018	565	600	757	15	5	0.030	0.018
1R32-06B2-1FSWC-765-957-0.018	765	800	957	15	5	0.035	0.018
1R32-06B2-1FSWC-965-1157-0.018	965	1000	1157	15	5	0.040	0.018
1R32-06B2-1FSWC-1165-1357-0.018	1165	1200	1357	15	5	0.046	0.018
1R32-06B2-1FSWC-1465-1657-0.018	1465	1500	1657	15	5	0.054	0.018

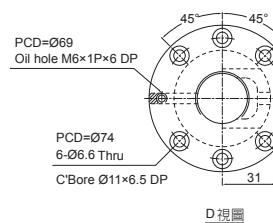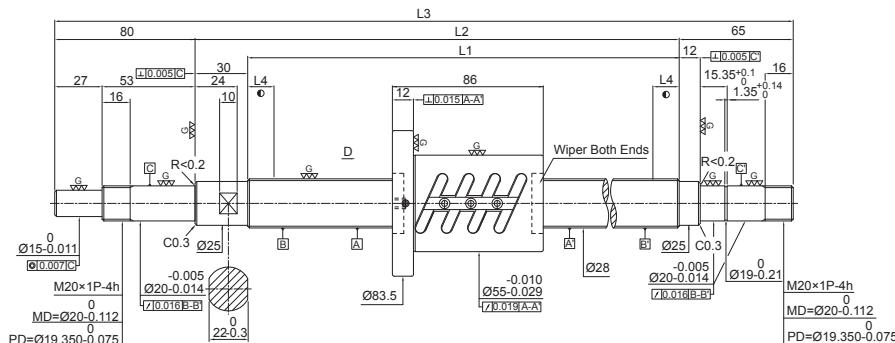

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	28.6
Lead	5
Ball Dia.	3.175
Effective Turns (Circuit × Row)	2.5 × 2(2)
Lead Angle	3.19
Dynamic Rate Load Ca (kgf)	1720
Static Rate Load Co (kgf)	4940
Axial Play	0
Preloading Torque (kgf-cm)	1.1~3.3


Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e_{300}
1R28-05B2-1FOWC-270-445-0.018	270	300	445	10	5	0.023	0.018
1R28-05B2-1FOWC-370-545-0.018	370	400	545	15	5	0.025	0.018
1R28-05B2-1FOWC-470-645-0.018	470	500	645	15	5	0.027	0.018
1R28-05B2-1FOWC-558-733-0.018	558	588	645	15	5	0.030	0.018
1R28-05B2-1FOWC-758-933-0.018	758	788	933	15	5	0.035	0.018
1R28-05B2-1FOWC-958-1133-0.018	958	988	1133	15	5	0.040	0.018
1R28-05B2-1FOWC-1158-1333-0.018	1158	1188	1333	15	5	0.046	0.018

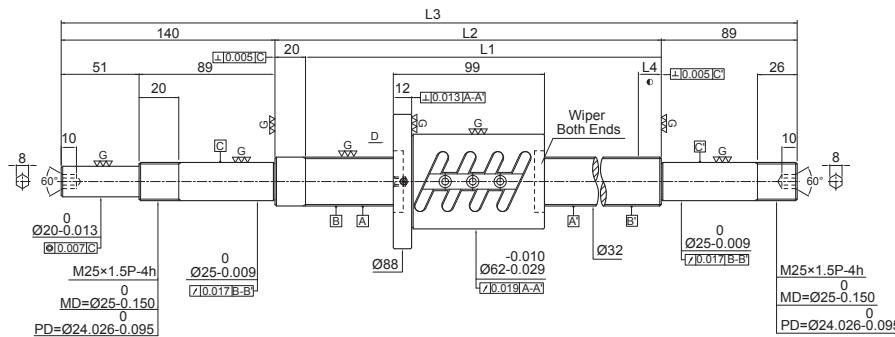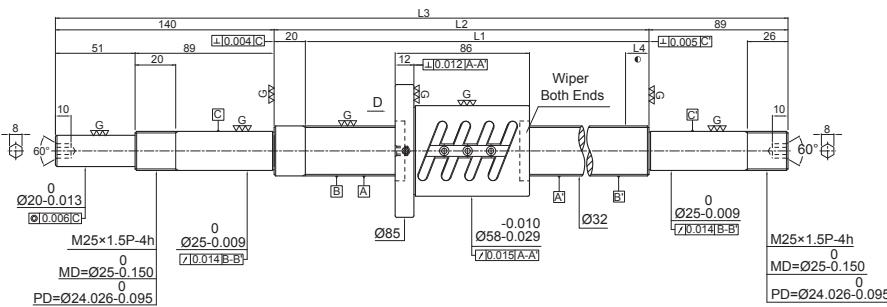


Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	32.6
Lead	5
Ball Dia.	3.175
Effective Turns (Circuit × Row)	2.5 × 2(2)
Lead Angle	2.79
Dynamic Rate Load Ca (kgf)	1830
Static Rate Load Co (kgf)	5680
Axial Play	0
Preloading Torque (kgf-cm)	1.2~3.6

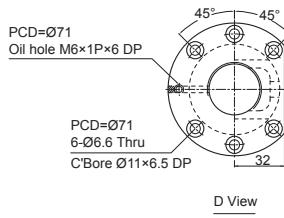

D View


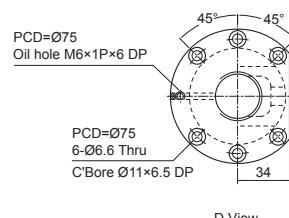


D View

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R32-05B2-1FOWC-280-529-0.018	280	300	529	10	5	0.023	0.018
1R32-05B2-1FOWC-380-629-0.018	380	400	629	15	5	0.025	0.018
1R32-05B2-1FOWC-480-729-0.018	480	500	729	15	5	0.027	0.018
1R32-05B2-1FOWC-580-829-0.018	580	600	829	15	5	0.030	0.018
1R32-05B2-1FOWC-680-929-0.018	680	700	929	15	5	0.035	0.018
1R32-05B2-1FOWC-780-1029-0.018	780	800	1029	15	5	0.035	0.018
1R32-05B2-1FOWC-980-1229-0.018	980	1000	1229	15	5	0.040	0.018
1R32-05B2-1FOWC-1180-1429-0.018	1180	1200	1429	15	5	0.046	0.018
1R32-05B2-1FOWC-1480-1729-0.018	1480	1500	1729	15	5	0.054	0.018

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R32-06B2-1FOWC-380-629-0.018	380	400	629	15	5	0.025	0.018
1R32-06B2-1FOWC-580-829-0.018	580	600	829	15	5	0.030	0.018
1R32-06B2-1FOWC-780-1029-0.018	780	800	1029	15	5	0.035	0.018
1R32-06B2-1FOWC-980-1229-0.018	980	1000	1229	15	5	0.040	0.018
1R32-06B2-1FOWC-1180-1429-0.018	1180	1200	1429	15	5	0.046	0.018
1R32-06B2-1FOWC-1480-1729-0.018	1480	1500	1729	15	5	0.054	0.018

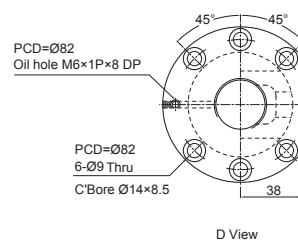
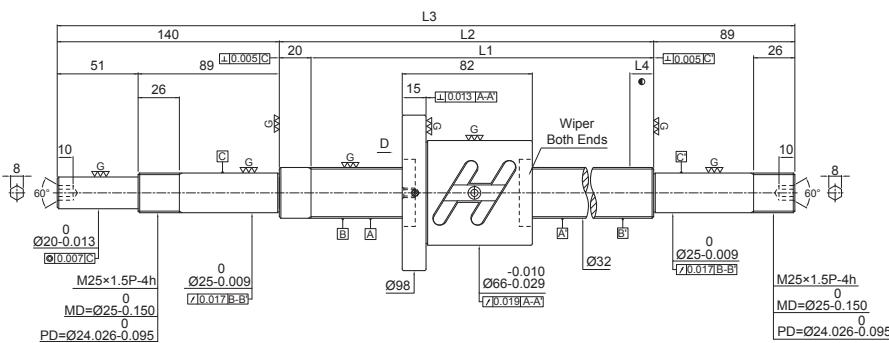


Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	33
Lead	8
Ball Dia.	4.762
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	4.41
Dynamic Rate Load Ca (kgf)	1720
Static Rate Load Co (kgf)	4180
Axial Play	0
Preloading Torque (kgf-cm)	1.26~5.06

Unit: mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R32-08B1-1FOWC-380-629-0.018	380	400	629	15	5	0.025	0.018
1R32-08B1-1FOWC-580-829-0.018	580	600	829	15	5	0.030	0.018
1R32-08B1-1FOWC-780-1029-0.018	780	800	1029	15	5	0.035	0.018
1R32-08B1-1FOWC-980-1229-0.018	980	1000	1229	15	5	0.040	0.018
1R32-08B1-1FOWC-1480-1729-0.018	1480	1500	1729	15	5	0.054	0.018

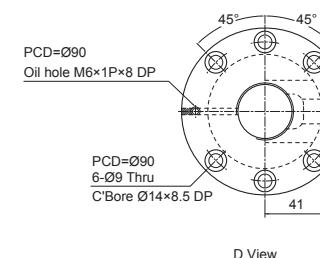
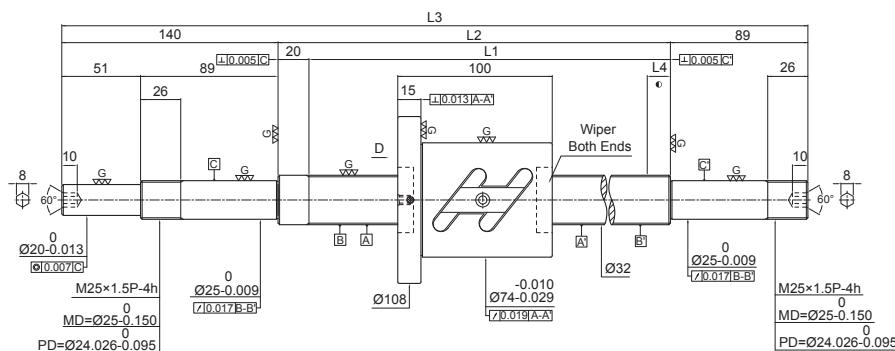


Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	33.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	5.44
Dynamic Rate Load Ca (kgf)	2570
Static Rate Load Co (kgf)	5440
Axial Play	0
Preloading Torque (kgf-cm)	3.58~7.44

Unit: mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R32-10B1-1FOWC-380-629-0.018	380	400	629	15	5	0.025	0.018
1R32-10B1-1FOWC-480-729-0.018	480	500	729	15	5	0.027	0.018
1R32-10B1-1FOWC-580-829-0.018	580	600	829	15	5	0.030	0.018
1R32-10B1-1FOWC-680-929-0.018	680	700	929	15	5	0.030	0.018
1R32-10B1-1FOWC-780-1029-0.018	780	800	1029	15	5	0.035	0.018
1R32-10B1-1FOWC-980-1229-0.018	980	1000	1229	15	5	0.040	0.018
1R32-10B1-1FOWC-1180-1429-0.018	1180	1200	1429	15	5	0.046	0.018
1R32-10B1-1FOWC-1480-1729-0.018	1480	1500	1729	15	5	0.054	0.018
1R32-10B1-1FOWC-1780-2029-0.018	1780	1800	2029	15	5	0.065	0.018

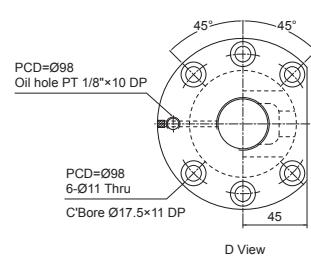
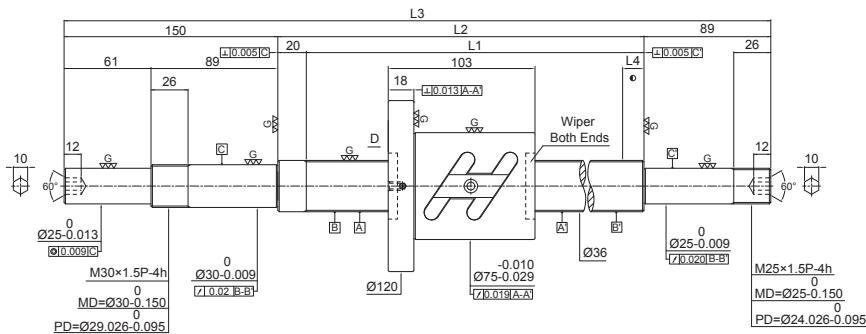
FOWC Standard ballscrews
Screw Dia. Ø36 Lead10


Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	37.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	4.86
Dynamic Rate Load Ca (kgf)	2720
Static Rate Load Co (kgf)	6180
Axial Play	0
Preloading Torque (kgf-cm)	3.91~8.13

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy	Lead Accuracy	
	L1	L2	L3	L4		Grade	Accumulated reference lead deviation E
1R36-10B1-1FOWC-480-739-0.018	480	500	739	15	5	0.027	0.018
1R36-10B1-1FOWC-680-939-0.018	680	700	939	15	5	0.030	0.018
1R36-10B1-1FOWC-980-1239-0.018	980	1000	1239	15	5	0.040	0.018
1R36-10B1-1FOWC-1380-1639-0.018	1380	1400	1639	15	5	0.054	0.018
1R36-10B1-1FOWC-1780-2039-0.018	1780	1800	2039	15	5	0.065	0.018

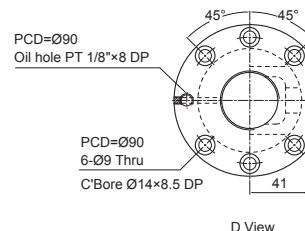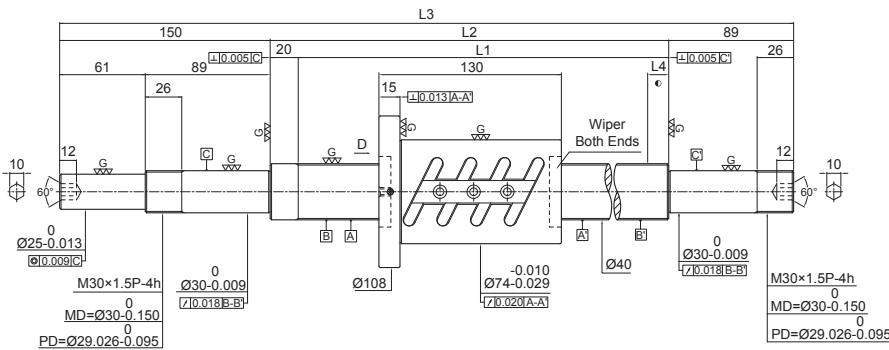



Specification of ball screw

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	41
Lead	8
Ball Dia.	4.762
Effective Turns (Circuit x Row)	2.5 x 2(2)
Lead Angle	3.55
Dynamic Rate Load Ca (kgf)	3450
Static Rate Load Co (kgf)	10540
Axial Play	0
Preloading Torque (kgf-cm)	4.24~8.82

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy	Lead Accuracy	
	L1	L2	L3	L4		Grade	Accumulated reference lead deviation E
1R40-08B2-1FOWC-380-639-0.018	380	400	639	15	5	0.025	0.018
1R40-08B2-1FOWC-580-839-0.018	580	600	839	15	5	0.030	0.018
1R40-08B2-1FOWC-780-1039-0.018	780	800	1039	15	5	0.035	0.018
1R40-08B2-1FOWC-980-1239-0.018	980	1000	1239	15	5	0.040	0.018
1R40-08B2-1FOWC-1180-1439-0.018	1180	1200	1439	15	5	0.046	0.018
1R40-08B2-1FOWC-1580-1839-0.018	1580	1600	1839	15	5	0.054	0.018



A1-225

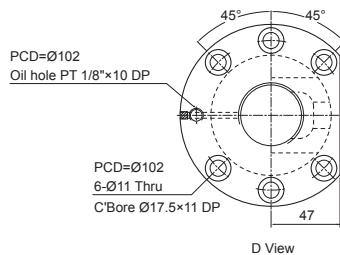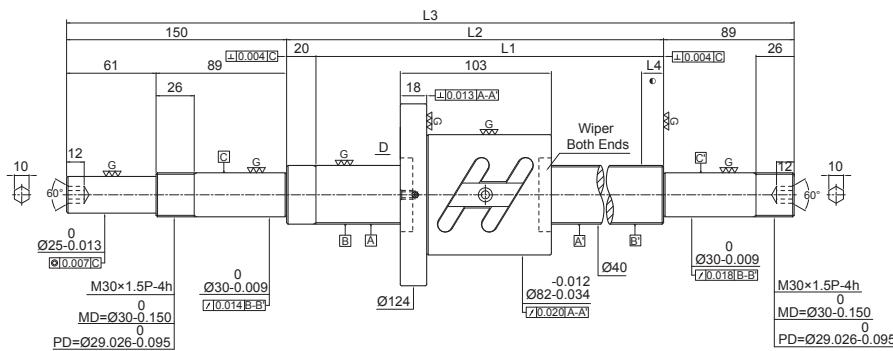FOWC Standard ballscrews
Screw Dia. Ø40 Lead10


Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	41.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	4.4
Dynamic Rate Load Ca (kgf)	2880
Static Rate Load Co (kgf)	6950
Axial Play	0
Preloading Torque (kgf-cm)	4.57~8.49

Unit:mm




Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R40-10B1-1FOWC-480-739-0.018	480	500	739	15	5	0.027	0.018
1R40-10B1-1FOWC-580-839-0.018	580	600	839	15	5	0.030	0.018
1R40-10B1-1FOWC-680-939-0.018	680	700	939	15	5	0.030	0.018
1R40-10B1-1FOWC-780-1039-0.018	780	800	1039	15	5	0.035	0.018
1R40-10B1-1FOWC-980-1239-0.018	980	1000	1239	15	5	0.040	0.018
1R40-10B1-1FOWC-1180-1439-0.018	1180	1200	1439	15	5	0.046	0.018
1R40-10B1-1FOWC-1380-1639-0.018	1380	1400	1639	15	5	0.054	0.018
1R40-10B1-1FOWC-1580-1839-0.018	1580	1600	1839	15	5	0.054	0.018
1R40-10B1-1FOWC-1780-2039-0.018	1780	1800	2039	15	5	0.065	0.018
1R40-10B1-1FOWC-2380-2639-0.018	2380	2400	2639	15	5	0.077	0.018

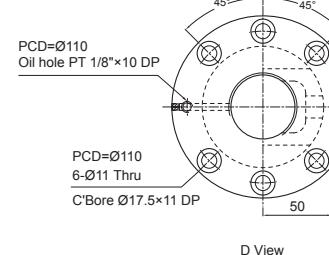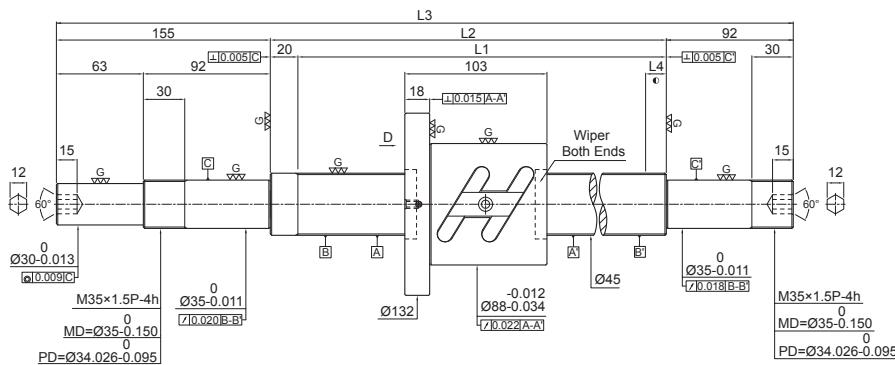

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	46.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	4.4
Dynamic Rate Load Ca (kgf)	3020
Static Rate Load Co (kgf)	7850
Axial Play	0
Preloading Torque (kgf-cm)	4.58~9.5

Unit:mm


Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R45-10B1-1FOWC-680-947-0.018	680	700	947	15	5	0.035	0.018
1R45-10B1-1FOWC-980-1247-0.018	980	1000	1247	15	5	0.04	0.018
1R45-10B1-1FOWC-1380-1647-0.018	1380	1400	1647	15	5	0.054	0.018
1R45-10B1-1FOWC-1780-2047-0.018	1780	1800	2047	15	5	0.065	0.018
1R45-10B1-1FOWC-2480-2747-0.018	2480	2500	2747	15	5	0.077	0.018

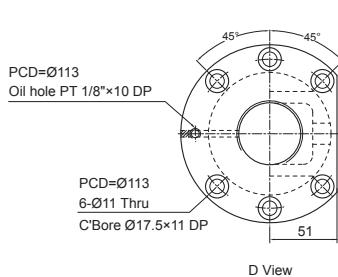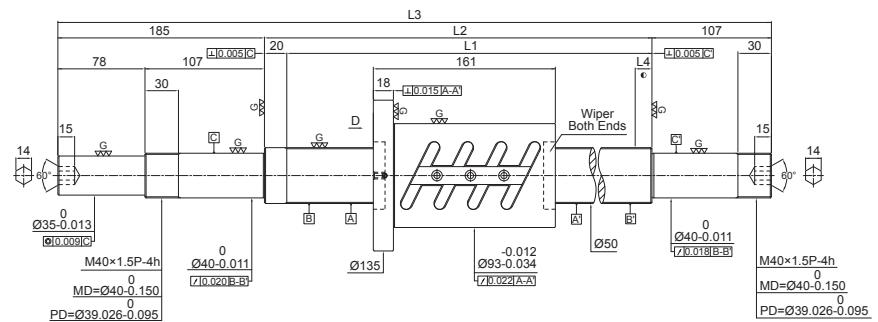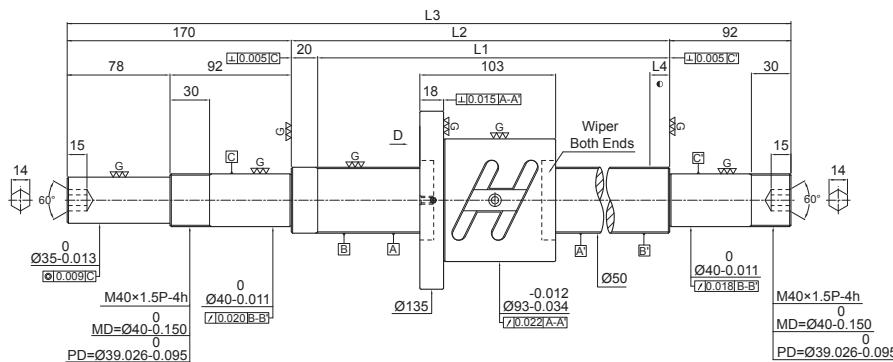

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	51.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 1(2)
Lead Angle	3.54
Dynamic Rate Load Ca (kgf)	3190
Static Rate Load Co (kgf)	8710
Axial Play	0
Preloading Torque (kgf-cm)	4.84~11.28

Unit: mm



Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R50-10B1-1FOWC-580-862-0.018	580	600	862	15	5	0.030	0.018
1R50-10B1-1FOWC-780-1062-0.018	780	800	1062	15	5	0.035	0.018
1R50-10B1-1FOWC-980-1262-0.018	980	1000	1262	15	5	0.040	0.018
1R50-10B1-1FOWC-1180-1462-0.018	1180	1200	1462	15	5	0.046	0.018
1R50-10B1-1FOWC-1480-1762-0.018	1480	1500	1762	15	5	0.054	0.018
1R50-10B1-1FOWC-1980-2262-0.018	1980	2000	2262	15	5	0.065	0.018
1R50-10B1-1FOWC-2580-2862-0.018	2580	2600	2862	15	5	0.093	0.018

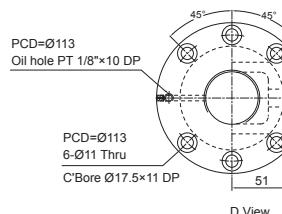



Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	51.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 2(2)
Lead Angle	3.54
Dynamic Rate Load Ca (kgf)	5790
Static Rate Load Co (kgf)	17420
Axial Play	0
Preloading Torque (kgf-cm)	10.48~17.48

Unit: mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm ϵ_{300}
1R50-10B2-1FOWC-580-892-0.018	580	600	892	15	5	0.030	0.018
1R50-10B2-1FOWC-780-1092-0.018	780	800	1092	15	5	0.035	0.018
1R50-10B2-1FOWC-980-1292-0.018	980	1000	1292	15	5	0.040	0.018
1R50-10B2-1FOWC-1180-1492-0.018	1180	1200	1492	15	5	0.046	0.018
1R50-10B2-1FOWC-1480-1792-0.018	1480	1500	1792	15	5	0.054	0.018
1R50-10B2-1FOWC-1980-2292-0.018	1980	2000	2292	15	5	0.065	0.018
1R50-10B2-1FOWC-2580-2892-0.018	2580	2600	2892	15	5	0.093	0.018

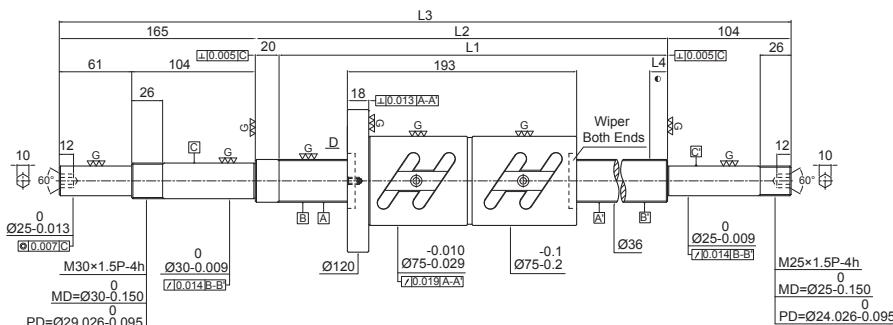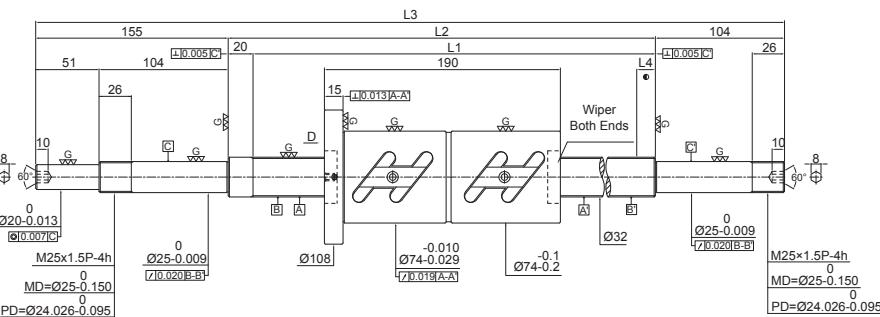**Specification of ball screw**

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	33.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 2
Lead Angle	5.44
Dynamic Rate Load Ca (kgf)	4660
Static Rate Load Co (kgf)	10880
Axial Play	0
Preloading Torque (kgf-cm)	5.51~11.43


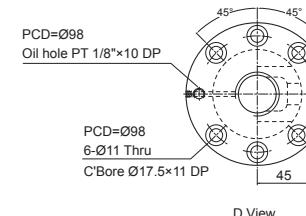
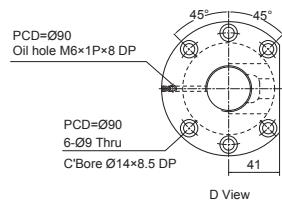
**Specification of ball screw**

Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	37.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 2
Lead Angle	4.86
Dynamic Rate Load Ca (kgf)	4930
Static Rate Load Co (kgf)	12360
Axial Play	0
Preloading Torque (kgf-cm)	6.64~12.34

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R32-10B2-1FDWC-380-659-0.018	380	400	659	15	5	0.025	0.018
1R32-10B2-1FDWC-480-759-0.018	480	500	759	15	5	0.027	0.018
1R32-10B2-1FDWC-580-859-0.018	580	600	859	15	5	0.030	0.018
1R32-10B2-1FDWC-680-959-0.018	680	700	959	15	5	0.030	0.018
1R32-10B2-1FDWC-780-1059-0.018	780	800	1059	15	5	0.035	0.018
1R32-10B2-1FDWC-980-1259-0.018	980	1000	1259	15	5	0.040	0.018
1R32-10B2-1FDWC-1180-1459-0.018	1180	1200	1459	15	5	0.046	0.018
1R32-10B2-1FDWC-1480-1759-0.018	1480	1500	1759	15	5	0.054	0.018
1R32-10B2-1FDWC-1780-2059-0.018	1780	1800	2059	15	5	0.065	0.018


Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R36-10B2-1FDWC-480-769-0.018	480	500	769	15	5	0.027	0.018
1R36-10B2-1FDWC-680-969-0.018	680	700	969	15	5	0.035	0.018
1R36-10B2-1FDWC-980-1269-0.018	980	1000	1269	15	5	0.040	0.018
1R36-10B2-1FDWC-1380-1669-0.018	1380	1400	1669	15	5	0.054	0.018
1R36-10B2-1FDWC-1780-2069-0.018	1780	1800	2069	15	5	0.065	0.018

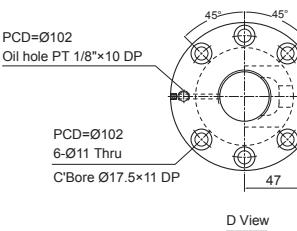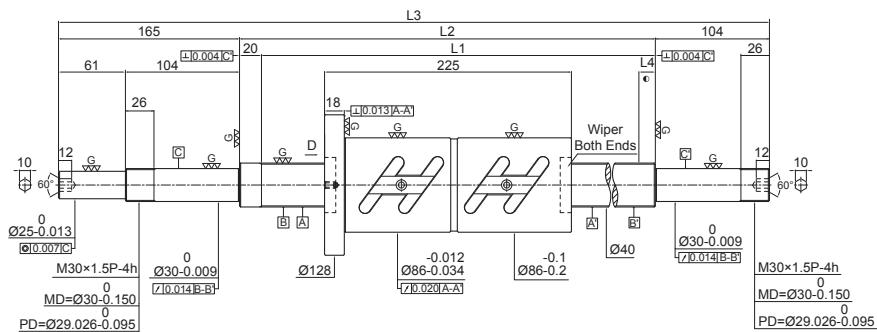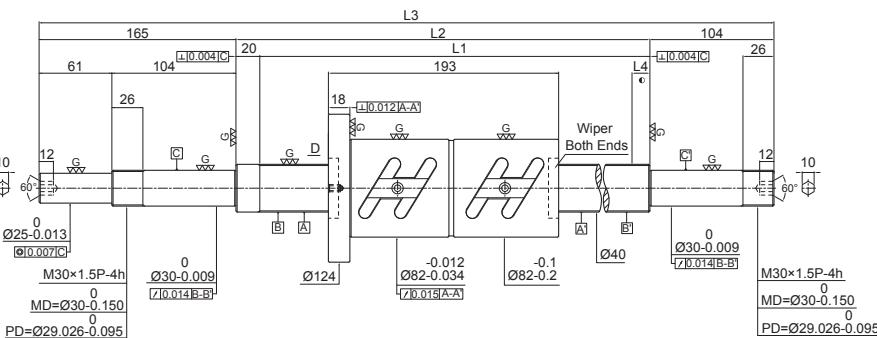

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	41.4
Lead	10
Ball Dia.	6.35
Effective Turns (Circuit x Row)	2.5 x 2
Lead Angle	4.4
Dynamic Rate Load Ca (kgf)	5220
Static Rate Load Co (kgf)	13900
Axial Play	0
Preloading Torque (kgf-cm)	8.26~13.78

Unit:mm

Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R40-10B2-1FDWC-480-769-0.018	480	500	769	15	5	0.027	0.018
1R40-10B2-1FDWC-580-869-0.018	580	600	869	15	5	0.030	0.018
1R40-10B2-1FDWC-680-969-0.018	680	700	969	15	5	0.030	0.018
1R40-10B2-1FDWC-780-1069-0.018	780	800	1069	15	5	0.035	0.018
1R40-10B2-1FDWC-980-1269-0.018	980	1000	1269	15	5	0.040	0.018
1R40-10B2-1FDWC-1180-1469-0.018	1180	1200	1469	15	5	0.046	0.018
1R40-10B2-1FDWC-1380-1669-0.018	1380	1400	1669	15	5	0.054	0.018
1R40-10B2-1FDWC-1580-1869-0.018	1580	1600	1869	15	5	0.054	0.018
1R40-10B2-1FDWC-1780-2069-0.018	1780	1800	2069	15	5	0.065	0.018
1R40-10B2-1FDWC-2380-2269-0.018	2380	2400	2269	15	5	0.077	0.018

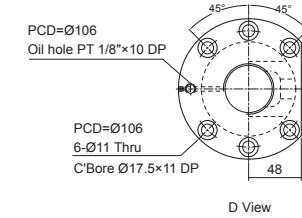

Specification of ball screw	
Production Specification	With Preload
Number of Thread / Thread Direction	1/Right
BCD	41.5
Lead	12
Ball Dia.	7.144
Effective Turns (Circuit x Row)	2.5 x 2
Lead Angle	5.26
Dynamic Rate Load Ca (kgf)	6170
Static Rate Load Co (kgf)	15700
Axial Play	0
Preloading Torque (kgf-cm)	9.79~18.17

Unit:mm


Model No.	Screw Spindle (Shaft) Length				Accuracy Grade	Lead Accuracy	
	L1	L2	L3	L4		Accumulated reference lead deviation E	Lead Derivation in random 300mm e ₃₀₀
1R40-12B2-1FDWC-680-969-0.018	680	700	969	15	5	0.030	0.018
1R40-12B2-1FDWC-980-1269-0.018	980	1000	1269	15	5	0.040	0.018
1R40-12B2-1FDWC-1380-1669-0.018	1380	1400	1669	15	5	0.054	0.018
1R40-12B2-1FDWC-1780-2069-0.018	1780	1800	2069	15	5	0.065	0.018
1R40-12B2-1FDWC-2480-2769-0.018	2480	2500	2769	15	5	0.077	0.018

Unit:mm

Introduction to Rolled Ballscrews

The production of the **PMI** rolled ballscrews has adopted a manufacturing process and equipment unlike other manufacturers. Combining advanced skills and the Bad Düben digital electric screw thread rolling machine, we adhere to a strict quality control policy at every stage of production, from the selection of ballscrew material and rolled processing to induction hardening heat treatment and post production. We are committed to providing clients with products of the best quality.

The combination of rolled ballscrews and ground nuts has replaced the traditional ACME screws and trapezoidal screws. This makes for a smoother operation while lowering friction and backlash. Moreover, the new technology has the advantage of faster production speed and lower prices.

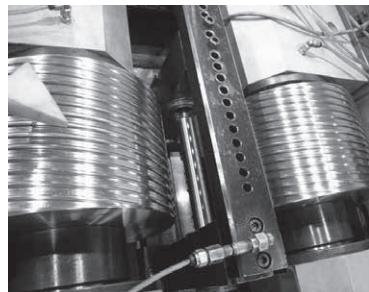

We employ the most advanced digital electric screw thread rolling machine. During the manufacturing process, the oil cylinders on the two axes of the thread rolling dies employ a servo hydraulic system for the correction of oil pressure and positioning precision.



We employ Germany-imported Bad Düben roller in order to maintain the stability of the thread rolling machine and the quality of the rolled product.

Features of the **PMI** Rolled Ballscrew

High Precision Rolled Nuts

The manufacturing process of rolled nuts is identical to that of ground nuts. Surface hardening treatment and internal thread grinding ensure durability and smoothness.

Nuts are Interchangeable

Without preload and within the maximum permissible axial play, different types of nuts can be used on the same screw.

Lead Accuracy of Rolled Screws (e_{300})

According to ISO 3408-3, the definition of lead accuracy for **PMI** rolled ballscrews is as follows: Within the effective thread length, the permissible value of accumulated lead deviation in random 300mm. As shown in **Table 1**:

Table 1 Lead Accuracy

e_{300} (Within the effective thread length, the permissible value of accumulated lead deviation in random 300mm)

Unit: μm

Grade	C5	C7	C8	C10
ISO, DIN	23	52	-	210
JIS	18	50	-	210
PMI	23	50	100	210

e_p (Within the effective thread length, the permissible value of accumulated lead deviation)

Unit: μm

Grade	C5	C7	C8	C10
PMI	$e_p = \pm(lu/300) \times e_{300}$	lu: Effective thread length (Unit: mm)		

e_{300}	Grade	C5	C7	C8	C10
Measured length					
0~100		20	44	84	178
101~200		22	48	92	194
201~315		25	50	100	210

Reference Table of the Nominal Outer Diameter and Lead of the PMI's Rolled Screw Shaft

PMI rolled ballscrews offer a variety of specifications, lead accuracies, and maximum rolling length, as shown in **Table 2~3**:

Table 2 Specifications of Rolled Ballscrews

Screw nominal outer diameter \varnothing	Lead															Maximum rolled ballscrew length
	1	2	2.5	4	5	5.08	6	10	12	16	20	25	32	40	50	
8	●	●	●													1000
10		●						●								1000
12			●	●			●	●								1500
14			●	●												3000
15				●			●		●	●						3000
16			●	●			●		●							3000
20			●	●			●			●			●			3000
25			●	●/○	●/○		●				●					6000
28			●		●											6000
32			●/○	●/○			●			●/○						6000
36							●									6000
38							●			●			●			6000
40				●			●			●			●			6000
50							●		●				●			6000
63							●		●							6000
80							●									6000

● : right-hand thread ○ : left-hand thread

Note: Rolled ballscrews are limited in length and accuracy, please contact us for other requirements.

Table 3 Lead Accuracy and Maximum Rolled Length

Screw nominal outer diameter $\varnothing(mm)$	Lead Accuracy Grade (e_{300}) Maximum Rolling Length (mm)			
	C5	C7	C8	C10
8	-	1000	1000	1000
10	-	1000	1000	1000
12	1500	1500	1500	1500
14				
15			3000	3000
16				3000
20				
25				
28			3000	
32				
36			6000	6000
38				
40				
50				
63	-	6000	6000	6000
80	-	6000	6000	6000

Axial Play

The maximum axial play under normal non-preload condition, as shown in **Table 4**

Table 4 Maximum Axial Play

Ball Diameter Ød (mm)	0.8~1.2	1.588~2.381	2.778~4.762	6.35~7.938
Maximum Axial Play (mm)	<0.01	<0.02	<0.04	<0.07


Materials and Hardness

Standard material and surface hardness for **PMI** rolled screw, as shown in **Table 5**

Table 5

Denomination	Material	Heat Treatment	Hardness (HRC)
Rolled screw	S55C/Equivalent	Induction hardening	58~62
Nuts	SCM420H/Equivalent	Carburized hardening	58~62

Types and Dimensions of Rolled Screw Shaft

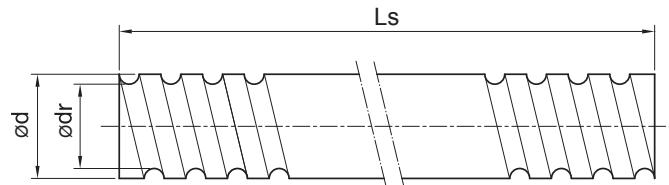

Unit: mm

O.D.	SCREW SIZE		Lead Accuracy Grade	Thread Direction L: Left / R: Right	Number of Threads	Maximum Rolling Length	Screw Number			
	LEAD	BALL DIA.								
8	1	0.8	C7,C8,C10	R	1	1000	R0801X			
	2	1.2					R0802Y			
	2.5	2					R081Z			
10	2	1.588	C7,C8,C10	R	1	1000	R1002K			
	10	2.381					2R1010A			
12	4	2.381	C5,C7,C8,C10	R	1	3000	R1204A			
	5	2					R1205Z			
	10	2.381					2R1010Z			
	12	2.381					2R1010A			
	20	2.381					2R1212A			
14	4	2.381	C5,C7,C8,C10	R	1	3000	R1404A			
	5	3.175					R1405B			
15	5	2.778	C5,C7,C8,C10	R	1	3000	R1505L			
	3	2.778					R1505V			
	10	3					2R1510L			
	16	2.778					2R1510V			
	20	2.778	C7,C8,C10				2R1510B			
	3	3.175					4R1516L			
	3	2.778					2R1516V			
16	3	2	C5,C7,C8,C10	R	1	3000	4R1520L			
	4	2.381					4R1520B			
	5	3.175					R1603Z			
	10	3.175					R1604A			
	16	3.175					R1605B			
	2	2.381					2R1610B			


SCREW SIZE			Lead Accuracy Grade	Thread Direction L: Left / R: Right	Number of Threads	Maximum Rolling Length	Screw Number	Unit: mm
O.D.	LEAD	BALL DIA.						
20	4	2.381	C5,C7,C8,C10	R	1	3000	R2004A	
	5	3.175			2		R2005B	
	10	3.175			1		2R2010B	
		4.762		R	4	3000	R2010D	
	20	3.175			8		4R2020B	
	40						8R2020B	
25	4	2.381	C5,C7,C8,C10	R	1	6000	R2504A	
	5	3.175			2		R(L)2505B	
	5.08				1		R(L)2515B	
		3.175		R	4	6000	2R2510B	
	10	4.762			8		R2510D	
		6.35					R2510F	
		3.175					4R2525B	
	25	3.969					4R2525C	
		3.969					8R2550C	
	50	3.969						
28	5		C5,C7,C8,C10	R	1	6000	R2805B	
	6	3.175					R2806B	
32	5	3.175	C5,C7,C8,C10	R/L	1	6000	R(L)3205B	
	5.08				2		R(L)3215B	
		3.969			1		R3210C	
	10	6.35		R	2	6000	R3210F	
		3.969			4		2R3220C	
	20	6.35					2R3220F	
	32	3.969		R/L			4R3232C	
		4.762					4R(L)3232D	
36	10	6.35	C5,C7,C8,C10	R	1	6000	R3610F	
38	10		C5,C7,C8,C10	R	1	6000	R3810F	
	20				2		2R3820F	
	40				4		4R3840F	
40	5	3.175	C5,C7,C8,C10	R	1	6000	R4005B	
	10				2		R4010F	
	20				4		2R4020F	
	40						4R4040F	
50	10	6.35	C5,C7,C8,C10	R	1	6000	R5010F	
	20				2		2R5020F	
	50	7.938			4		4R5050H	
63	10		C7,C8,C10	R	1	6000	R6310F	
	20				2		2R6320F	
80	10	6.35	C7,C8,C10	R	1	6000	R8010F	

Nomenclature**1 R 15 10 A -1500 -C7**

- Lead Accuracy Grade
- Custom Length of Screw (mm)
- Ball Diameter(mm) (A: 2.381 B: 3.175 C: 3.969 D: 4.762 F:6.35 H:7.938 K:1.588 L:2.778 X:0.8 Y:1.2 Z:2.0 V:3.0)
- Lead (mm)
- Screw Nominal O.D. (mm)
- Thread Direction (R: Right L: Left)
- Number of Threads (N/A for single thread screws)

Nut Types of Rolled Ballscrew**Standard Models:**

Optional Models:

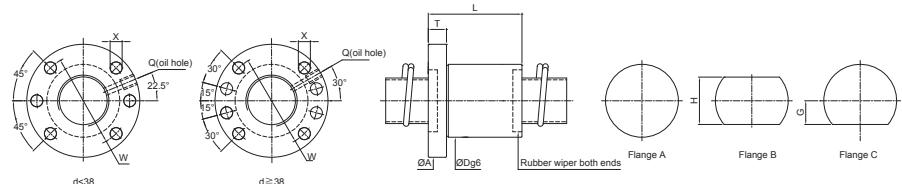

Unit:mm

SCREW SIZE	BALL DIA.	circuit x number of thread	MODIFIED LOAD CAPACITY (kgf)		BALLNUT DIMENSION									Nut Model NO.	
			Dynamic (1x10 ⁶ REV) Cam	Static Coam	O.D.	Length	Flange				Oil Hole	Assembly Hole	STIFFNESS		
O.D.	LEAD		D	L	A	T	W	G	H	Q	X		kgf/ μ m	Nut Model NO.	
15	5	4x1	1210	2130	28	39	48	10	38	20	40	M6x1P	5.5	22 FSDN1505V-4.0P	
	10	3	3x1	950	1650	28	47	48	10	38	20	40	M6x1P	5.5	17 FSDN1510V-3.0P
	16	3x1	910	1600	28	64	48	10	38	20	40	M6x1P	5.5	17 FSDN1516V-3.0P	
20	5	4x1	1570	3270	36	40	58	10	47	22	44	M6x1P	6.6	28 FSDN2005B-4.0P	
	20	3.175	2x2	1460	3120	36	58	58	10	47	22	44	M6x1P	6.6	28 FSDN2020B-4.0P
	5	5x1	2130	5230	40	46	62	10	51	24	48	M6x1P	6.6	41 FSDN2505B-5.0P	
25	10	3.175	4x1	1740	4120	40	60	62	10	51	24	48	M6x1P	6.6	33 FSDN2510B-4.0P
	25	2x2	1610	3900	40	68	62	10	51	24	48	M6x1P	6.6	33 FSDN2525B-4.0P	
	5	3.175	6x1	2800	8180	50	53	80	12	65	31	62	M6x1P	9	59 FSDN3205B-6.0P
32	10	5x1	3240	8480	50	73	80	12	65	31	62	M6x1P	9	52 FSDN3210C-5.0P	
	20	3.969	4x1	2600	6630	50	101	80	12	65	31	62	M6x1P	9	42 FSDN3220C-4.0P
	32	2x2	2460	6340	50	84	80	12	65	31	62	M6x1P	9	41 FSDN3232C-4.0P	
38	10	5x1	6500	15610	63	78	93	14	78	35	70	M8x1P	9	64 FSDN3810F-5.0P	
	20	6.35	4x1	5250	12240	63	107	93	14	78	35	70	M8x1P	9	52 FSDN3820F-4.0P
	40	2x2	4940	11770	63	104	93	14	78	35	70	M8x1P	9	51 FSDN3840F-4.0P	

Note: 1. Cam and Coam represent the enhanced dynamic- and static load. Their calculations referred to the standard of DIN 69051.

2. Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

Effective Turns

Ball Diameter(mm) (A: 2.381 B: 3.175 C: 3.969 D: 4.762 F: 6.35
H: 7.938 K: 1.588 L: 2.778 X: 0.8 Y: 1.2 Z: 2.0 V: 3.0)

Lead(mm)

Screw nominal O.D.(mm)

N: DIN 69051 Nut Dimension

W: Rolled Threads

U: DIN 69051 Nut Dimension with seal

Ball Circulation Type D : End Deflctor Series

I : Internal Ball Circulation Nuts

W : Immersion type

V : Extrusive type


K : End Cap Series

M : Miniature type

Single Nut

Type of Nuts(F:with flange R:without flange S:square nut)

Thread Direction(R: Right L:Left)

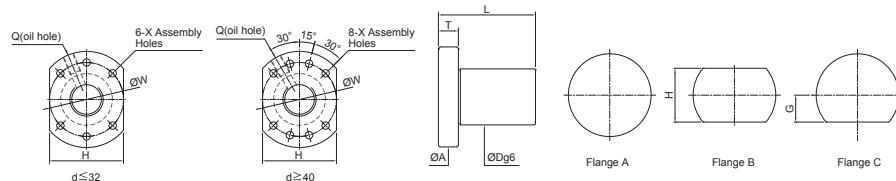


Unit:mm

SCREW SIZE	O.D.	LEAD	EFFECTIVE TURNS circuit × number of thread	MODIFIED LOAD CAPACITY (kgf)		BALLNUT DIMENSION												Nut Model NO.		
				BALL DIA.	Dynamic (1×10 ⁶ REV) Cam	Static Coam	O.D.	Length	Flange			Oil Hole	Assembly Hole	Q	X					
									D	L	A									
12	5	2	3x1	630	1060	24	30	40	10	32	15	30	M5×0.8P	4.5	FSDU1205Z-3.0P					
	10		3x1	620	1040	24	45	40	10	32	15	30	M5×0.8P	4.5	FSDU1210Z-3.0P					
	5		4x1	1130	2100	28	37	48	10	38	20	40	M6×1P	5.5	FSDU1505L-4P					
	10		3x1	850	1530	28	47	48	10	38	20	40	M6×1P	5.5	FSDU1510L-3P					
15	16	2.778	2x1	580	1010	28	47	48	10	38	20	40	M6×1P	5.5	FSDU1516L-2P					
	16		3x1	850	1570	28	63	48	10	38	20	40	M6×1P	5.5	FSDU1516L-3P					
	20		2x1	560	970	28	58	48	10	38	20	40	M6×1P	5.5	FSDU1520L-2P					
	5		4x1	1570	3270	38	40	58	10	47	22	44	M6×1P	6.6	FSDU2005B-4.0P					
20	10	3.175	4x1	1560	3250	56	58	58	10	47	22	44	M6×1P	6.6	FSDU2010B-4.0P					
	20		2x1	810	1550	56	58	58	10	47	22	44	M6×1P	6.6	FSDU2020B-2.0P					
	20		3x1	1180	2430	76	78	58	10	47	22	44	M6×1P	6.6	FSDU2020B-3.0P					
	5		4x1	1750	4150	40	39	62	10	51	24	48	M6×1P	6.6	FSDU2505B-4.0P					
	10		4x1	1740	4120	40	59	62	12	51	24	48	M6×1P	6.6	FSDU2510B-4.0P					
25	20	3.175	2x1	910	1990	40	59	62	12	51	24	48	M6×1P	6.6	FSDU2520B-2.0P					
	25		2x1	900	1950	40	66	62	12	51	24	48	M6×1P	6.6	FSDU2525B-2.0P					
	25		3x1	1290	3040	40	91	62	12	51	24	48	M6×1P	6.6	FSDU2525B-3.0P					

Note: 1. Cam and Coam represent the enhanced dynamic- and static load. Their calculations referred to the standard of DIN 69051.

2. Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

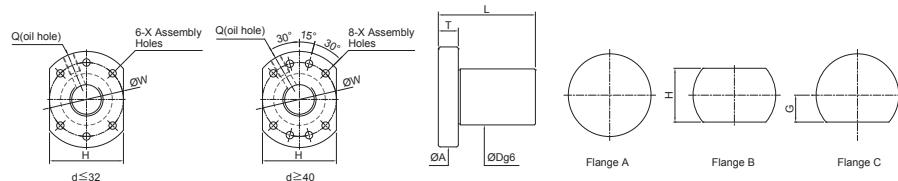


Unit:mm

SCREW SIZE	O.D.	LEAD	EFFECTIVE TURNS circuit × number of thread	MODIFIED LOAD CAPACITY (kgf)		BALLNUT DIMENSION												Nut Model NO.		
				BALL DIA.	Dynamic (1×10 ⁶ REV) Cam	Static Coam	O.D.	Length	Flange			Oil Hole	Assembly Hole	Q	X					
									D	L	A									
32	5	3.175	4x1	1940	5360	50	42	80	12	65	31	62	M6×1P	9	FSDU3205B-4.0P					
	10		4x1	2660	6710	50	62	80	12	65	31	62	M6×1P	9	FSDU3210C-4.0P					
32	20	3.969	3x1	2000	4870	50	81	80	12	65	31	62	M6×1P	9	FSDU3220C-3.0P					
	32		2x1	1350	3170	50	83	80	12	65	31	62	M6×1P	9	FSDU3232C-2.0P					
	32		3x1	1980	4920	50	115	80	12	65	31	62	M6×1P	9	FSDU3232C-3.0P					
38	10	6.35	4x1	5110	13800	63	66	93	14	78	35	70	M8×1P	9	FSDU3810F-4.0P					
	20	6.35	3x1	4030	9020	63	86	93	14	78	35	70	M8×1P	9	FSDU3820F-3.0P					
40	40	6.35	2x1	2730	5890	63	103	93	14	78	35	70	M8×1P	9	FSDU3840F-2.0P					
	40		3x1	3980	7160	63	143	93	14	78	35	70	M8×1P	9	FSDU3840F-3.0P					
40	5	3.175	4x1	2130	6750	63	43	93	15	78	35	70	M8×1P	9	FSDU4005B-4.0P					
	10	6.35	4x1	6070	16540	75	70	110	15	93	55	85	M8×1P	11	FSDU5010F-4P					
50	20	6.35	4x1	6020	16440	75	110	110	15	93	55	85	M8×1P	11	FSDU5020F-4P					

Note: 1. Cam and Coam represent the enhanced dynamic- and static load. Their calculations referred to the standard of DIN 69051.


2. Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

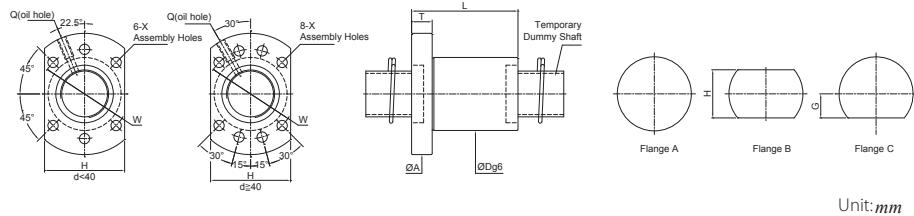

SCREW SIZE	BALL DIA.	EFFECTIVE LEAD	MODIFIED LOAD CAPACITY (kgf)		BALLNUT DIMENSION										Nut Model NO.		
			O.D.	Dynamic (1x10 ⁶ REV) Cam	Static Coam	O.D.	Length	Flange			Oil Hole	Assembly Hole	STIFFNESS X				
								D	L	A							
16	5	3.175	3	1050	2200	28	42	48	10	38	20	40	M6x1P	5.5	17	FSIN1605B-3.0P	
20	5	3.175	4	1530	3720	36	50	58	12	47	22	44	M6x1P	6.5	25	FSIN2005B-4.0P	
25	5	3.175	4	1700	4720	40	50	62	12	51	24	48	M6x1P	6.5	37	FSIN2505B-4.0P	
	10	4.762	4	2900	6990		85	62	12	51	24	48	M6x1P	6.5	32	FSIN2510D-4.0P	
32	5	3.175	4	1900	6090	50	50	80	12	65	31	62	M6x1P	9	50	FSIN3205B-4.0P	
	10	6.35	4	4720	11670	50	80	80	13	65	31	62	M6x1P	9	50	FSIN3210F-4.0P	
40	5	3.175	4	2090	7670	63	54	93	15	78	35	70	M8x1P	9	52	FSIN4005B-4.0P	
	10	6.35	4	5310	14850		82								60	FSIN4010F-4.0P	
50	10	6.35	4	5890	18780	75	88	110	18	93	42.5	85	M8x1P	11	70	FSIN5010F-4.0P	

Note: 1. Cam and Coam represent the enhanced dynamic- and static load. Their calculations referred to the standard of DIN 69051.


2. Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

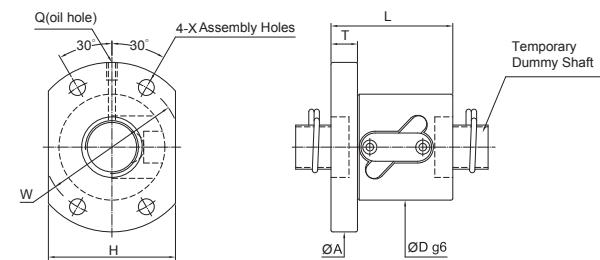

SCREW SIZE	BALL DIA.	EFFECTIVE LEAD	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION										Nut Model NO.		
			O.D.	Dynamic (1x10 ⁶ REV) Ca	Static Co	O.D.	Length	Flange			Assembly Hole	Oil Hole	STIFFNESS X				
								D	L	A							
12	4	2.381	2.5x1	285	533	30	40	52	10	40	31	4.5	M6x1P	9	FSWW1204A-2.5P		
14	5	2	2.5x1	270	350	26	40	47	10	37	30	4.5	M6x1P	8.2	FSWW1205Z-2.5P		
	4	2.381	3.5x1	500	1100	35	42	57	10	45	40	4.5	M6x1P	15	FSWW1404A-3.5P		
15	5	3.175	2.5x1	515	990	40	40	57	10	45	40	4.5	M6x1P	11	FSWW1405B-2.5P		
	10	3.175	2.5x1	440	680	34	55	57	10	45	34	5.5	M6x1P	12	FSWW1510B-2.5P		
16	4	2.381	3.5x1	610	1470	34	42	57	11	45	34	5.5	M6x1P	17	FSWW1604A-3.5P		
	5	3.175	2.5x1	550	1140	40	41	63	11	51	42	5.5	M6x1P	13	FSWW1605B-2.5P		
20	10	3.175	2.5x1	550	990	40	56	63	11	51	42	5.5	M6x1P	13	FSWW1610B-2.5P		
	4	2.381	2.5x2	1140	3120	40	56	67	11	55	52	5.5	M6x1P	30	FSWW2004A-5.0P		
25	5	3.175	2.5x1	625	1450	44	41	67	10	55	52	5.5	M6x1P	15	FSWW2005B-2.5P		
	10	4.762	2.5x1	1100	2200	52	61	82	12	67	64	6.6	M6x1P	16	FSWW2010D-2.5P		
30	5	3.175	2.5x2	1120	3710	50	56	73	11	61	56	6.6	M6x1P	37	FSWW2505B-5.0P		
	10	4.762	2.5x1	1270	2780	58	65	85	15	71	64	6.6	M6x1P	20	FSWW2510D-2.5P		
35	10	6.35	2.5x2	3200	7170	60	97	96	15	78	72	9	M6x1P	40	FSWW2510F-5.0P		


Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

FSWW

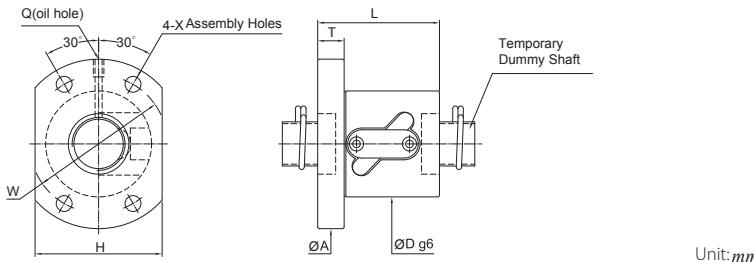

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION													
			O.D.	LEAD	Dynamic (1x10 ⁶ REV) Ca	Static Co	O.D.	Length	Flange		Assembly Hole	Oil Hole	STIFFNESS	Nut Model NO.				
D	L	A	T	W	H	X	Q	kgf/μm										
28	5 3.175	1.5x2	910	2470	46										21	FSWW2805B-3.0P		
		2.5x1	780	2060	55	42	83	12	69	62	6.6	M8x1P			18	FSWW2805B-2.5P		
		2.5x2	1410	4120	56	83	12	69	62	6.6	M8x1P				33	FSWW2805B-5.0P		
		3.5x1	1040	2880	47										24	FSWW2805B-3.5P		
32	5 3.175	2.5x2	1540	4720	58	57	85	12	71	64	6.6	M8x1P	41			FSWW3205B-5.0P		
		10 6.35	2.5x2	3130	9410	67	97	103	15	85	78	9	M6x1P	49			FSWW3210F-5.0P	
36	10 6.35	1.5x2	2170	6480	81										30	FSWW3610F-3.0P		
		2.5x2	3370	10800	70	99	110	17	90	82	11	M6x1P	29			FSWW3610F-5.0P		
40	5 3.175	2.5x2	1830	5940	67	60	101	15	83	78	9	M8x1P	60			FSWW4005B-5.0P		
		10 6.35	2.5x2	3520	12000	76	100	116	17	96	88	11	M6x1P	59			FSWW4010F-5.0P	
50	10 6.35	2.5x2	3900	15000	88	101	128	18	108	100	11	M6x1P	72			FSWW5010F-5.0P		
63	10 6.35	2.5x2	4770	18660	108	105	154	22	130	116	14	M8x1P	75			FSWW6310F-5.0P		
80	10 6.35	2.5x2	5340	23750	130	105	176	22	152	132	14	M8x1P	90			FSWW8010F-5.0P		

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

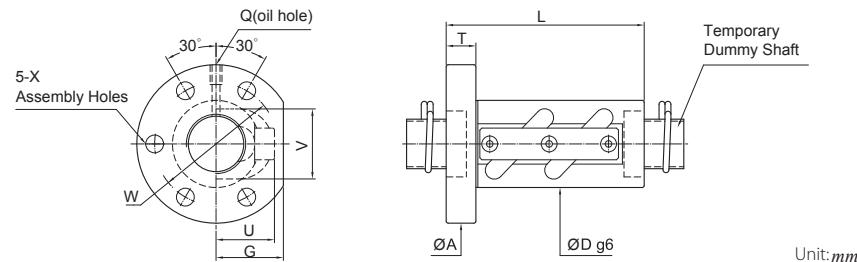



SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION													
			O.D.	LEAD	Dynamic (1x10 ⁶ REV) Ca	Static Co	O.D.	Length	Flange		Return tube	Assembly Hole	Oil Hole	STIFFNESS	Nut Model NO.			
D	L	A	T	W	H	X	Q	kgf/μm										
14	4 2.381	3.5x1	500	1100	25	42	55	10	40	19	19	21	4.5	M6x1P	15	FSVW1404A-3.5P		
		5 3.175	2.5x1	515	990	30	43	50	10	40	22	19	21	4.5	M6x1P	11	FSVW1405B-2.5P	
		5 3.175	2.5x2	1000	2280	31	60	54	12	41	24	20	23	5.5	M6x1P	23	FSVW1605B-5.0P	
		5 3.175	2.5x2	1130	2900	40	60	60	12	50	28	23	27	4.5	M6x1P	28	FSVW2005B-5.0P	
20	5 3.175	2.5x1	1100	2200	40	60	67	12	53	30	27	30	6.6	M6x1P	16	FSVW2010D-2.5P		
		5 3.175	2.5x1	720	1830	42	45	71	12	57	28	25	32	6.6	M6x1P	18	FSVW2505B-2.5P	
		10 4.762	3.5x1	1690	3900	45	75	72	16	58	34	29	34	6.6	M6x1P	27	FSVW2510D-3.5P	
		10 6.35	2.5x1	1720	3590	44	68	79	15	62	34	30	37	9	M6x1P	21	FSVW2510F-2.5P	
28	5 3.175	1.5x2	910	2470	50												21	FSVW2805B-3.0P
		2.5x1	780	2060	45												18	FSVW2805B-2.5P
		2.5x2	1410	4120	60												33	FSVW2805B-5.0P
		3.5x1	1040	2880	50												24	FSVW2805B-3.5P
32	5 3.175	2.5x2	1540	4720	50												6.6	FSVW3205B-5.0P
		10 6.35	2.5x2	3130	9410	55	101	97	18	75	39	37	44	11	M6x1P	49	FSVW3210F-5.0P	
		10 6.35	1.5x2	2170	6480	60	82	105	18	80	42	40	49	11	M6x1P	30	FSVW3610F-3.0P	
		5 3.175	3.5x1	1350	4160	58	55	92	16	72	42	34	46	9	M8x1P	43	FSVW4005B-3.5P	
40	10 6.35	3.5x1	2590	8400	65	82	106	18	85	44	42	52	11	PT1/8"	45	FSVW4010F-3.5P		
		10 6.35	3.5x2	4770	18660	108	105	154	22	130	44	53	76	14	M8x1P	98	FSVW5010F-7.0P	
		10 6.35	2.5x2	5340	23750	130	105	176	22	152	48	64	91	14	M8x1P	75	FSVW6310F-5.0P	
		10 6.35	2.5x2	5340	23750	130	105	176	22	152	48	64	91	14	M8x1P	90	FSVW8010F-5.0P	


Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

FSVW

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION									
			O.D.	LEAD	Dynamic (1x10 ⁶ REV.) Ca	Static Co	O.D.	Length	Flange		Return tube	STIFFNESS kgf/μm	Nut Model NO.	
D	L	M	T	U	V								Q	
14	4	2.381	3.5×1	500	1100	25	42	M24×1.0P	10	19	21	15	RSVW1404A-3.5P	
	5	3.175	2.5×1	515	990	30	43	M26×1.5P	10	19	21	11	RSVW1405B-2.5P	
20	5	3.175	2.5×1	625	1450	40	43	M36×1.5P	12	23	27	15	RSVW2005B-2.5P	
	5	3.175	2.5×1 2.5×2	720	1830	42	48	M40×1.5P	15	28	32	18	RSVW2505B-2.5P	
25	5	3.175	2.5×1 2.5×2	1120	3710	42	63					37	RSVW2505B-5.0P	
	10	6.350	2.5×1 2.5×2	1720	3590	44	68	M42×1.5P	15	34	37	21	RSVW2510F-2.5P	
32	10	6.350	2.5×1 2.5×2	3200	7170	44	98					40	RSVW2510F-5.0P	
	10	6.350	2.5×1	1930	4680	55	72	M50×1.5P	18	37	44	25	RSVW3210F-2.5P	
40	10	6.350	3.5×2	4450	16800	65	128	M60×2.0P	25	44	52	81	RSVW4010F-7.0P	
	10	6.350	3.5×2	4940	21000	80	143	M75×2.0P	40	48	62	98	RSVW5010F-7.0P	

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

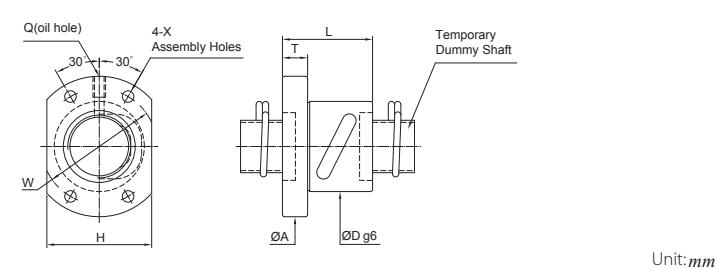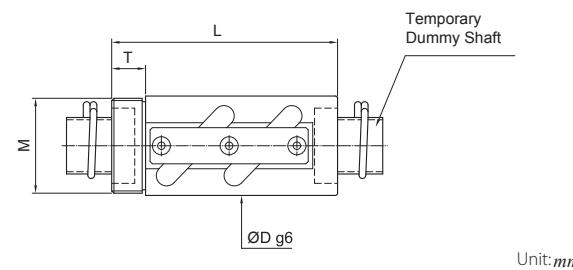

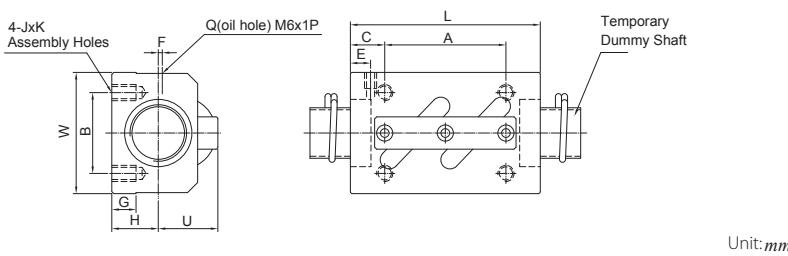


PMI Rolled BallScrews

End Cap Series

SCREW SIZE	EFFECTIVE LEAD	BALL DIA.	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION													
			DYNAMIC (1x10 ⁶ REV.) Ca	STATIC CO	Length L	Width W	Height H	Assembly Hole			Position of Oil Hole	Height from Reference Surface	STIFFNESS	Nut Model NO.				
								A	B	C								
14	4	2.381	3.5x1	500	1110	35	34	13	22	26	6.5	M4x7	6	2	6	18	15	SSVW1404A-3.5P
	5	3.175	2.5x1	515	990	35	34	13	22	26	6.5	M4x7	6	2	6	18	11	SSVW1405B-2.5P
16	5	3.175	2.5x1	590	1210	35	42	16	22	32	6.5	M5x8	6	2	8	21	13	SSVW1605B-2.5P
	5	3.175	2.5x1	625	1450	35	48	17	22	35	6.5	M6x10	6	3	9.15	22	15	SSVW2005B-2.5P
20	10	4.762	2.5x1	1100	2220	58	48	18	35	35	11.5	M6x10	10	2	9.5	25	16	SSVW2010D-2.5P
	5	3.175	2.5x1	720	1830	35	60	20	22	40	6.5	M8x12	7	5	9.5	25	18	SSVW2505B-2.5P
25	10	6.350	2.5x2	3240	7170	94	60	23	60	40	17	M8x12	10	-	10	30	40	SSVW2510F-5.0P
	6	3.175	2.5x2	1380	4140	67	60	22	40	40	13.5	M8x12	8	5	10	27	39	SSVW2806B-5.0P
32	10	6.350	2.5x1	1930	4680	64	70	26	45	50	9.5	M8x12	10	-	12	36	25	SSVW3210F-2.5P
	2.5x2	3130	9410	94			60	17					49					SSVW3210F-5.0P


Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

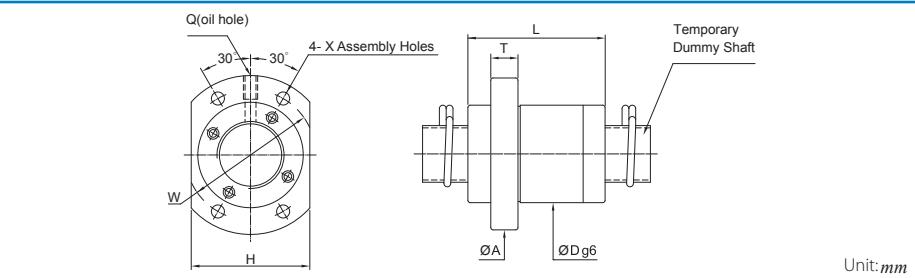

SCREW SIZE	EFFECTIVE LEADS	BALL DIA.	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION												
			O.D.	LEAD	circuit x number of thread	Dynamic (1x10 ⁶ REV.) Ca	Static Co	O.D. D	Length L	Flange			Assembly Hole	Oil Hole Q	STIFFNESS kgf/ μ m	Nut Model NO.	
										A	T	W	H	X			
12	12	2.381	1.8x2			410	850	25	31	40	6	32	21	4.5	M4x0.7P	13	FSKW1212A-3.6P
15	10	3.175	2.8x2			1000	2570	34	44	57	10	45	40	5.5	M6x1P	26	FSKW1510B-5.6P
15	20	3.175	1.8x1			380	830	34	45	57	10	45	40	5.5	M6x1P	26	FSKW1520B-1.8P
16	16	3.175	1.8x1			330	640	32	38	53	10	42	38	4.5	M6x1P	9	FSKW1616B-1.8P
16	20	3.175	1.8x2			780	2280	39	52	62	10	50	46	5.5	M6x1P	21	FSKW2020B-3.6P
20	40	3.175	0.8x2			390	1010	38	41	58	10	48	40	5.5	M6x1P	14	FSKW2040B-1.6P
20	40	3.175	1.8x1			430	1140	81								16	FSKW2040B-1.8P
25	25	3.969	1.8x2			1230	3570	47	62	74	12	60	56	6.6	M6x1P	27	FSKW2525C-3.6P
25	25	3.969	1.8x4			2230	7140	58	78	92	15	74	68	9	M6x1P	65	FSKW2525C-7.2P
32	32	4.762	1.8x2			1760	5500	73	95	114	17	93	84	11	M6x1P	42	FSKW3232D-3.6P
32	32	4.762	1.8x4			3200	11000	90	122	135	20	112	104	14	M6x1P	81	FSKW4040F-7.2P
40	40	6.350	1.8x2			2870	9170	120	140	160	20	180	160	14	M6x1P	103	FSKW5050H-7.2P
50	50	7.938	1.8x4			7890	26330	120	140	160	20	180	160	14	M6x1P		

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

Internal Ball Circulation Series

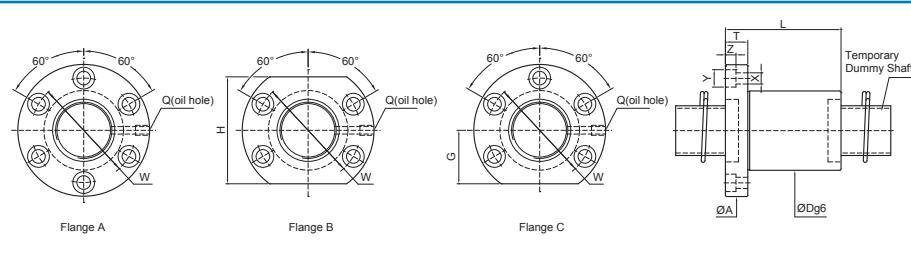


SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION										
			O.D.	LEAD	Dynamic (1×10^6 REV) Ca	Static Co	O.D.	Length	Flange		Assembly Hole		Oil Hole	STIFFNESS $\text{kgf}/\mu\text{m}$	Nut Model NO.
D	L	A	T	W	G	H	X	Y	Z	Q					
14	4	2.381	4	400	890	26	47	46	10	36	20	40	4.5	8	4.5 M6x1P 18 FSIW1404A-4.0P
16	4	2.381	3	320	760	28	42	48.5	10	39	20	40	4.5	8	4.5 M6x1P 13 FSIW1604A-3.0P
16	5	3.175	3	570	1030	30	42	49	10	39	20	40	4.5	8	4.5 M6x1P 17 FSIW1605B-3.0P
20	4	2.381	4	450	1270	34	44	60	12	48	22	44	5.5	9.5	5.5 M6x1P 19 FSIW2004A-4.0P
20	5	3.175	4	830	1890	34	53	57	12	45	20	40	5.5	9.5	5.5 M6x1P 21 FSIW2005B-4.0P
20	4	2.381	3	380	1195	40	40	63	12	51	22	44	5.5	9.5	5.5 M8x1P 17 FSIW2504A-3.0P
25	5	3.175	4	940	2420	40	53	63.5	12	51	22	44	5.5	9.5	5.5 M8x1P 26 FSIW2505B-4.0P
25	10	4.762	4	1550	3540	42	85	68.5	15	55	26	52	6.6	11	6.5 M8x1P 28 FSIW2510D-4.0P
28	6	3.175	3	770	2180	43	50	68	12	55	26	52	6.6	11	6.5 M8x1P 22 FSIW2806B-3.0P
32	5	3.175	4	1050	3390	48	53	73.5	12	60	30	60	6.6	11	6.5 M8x1P 32 FSIW3205B-4.0P
32	10	6.35	4	2510	5880	54	90	88	16	70	34	68	9	14	8.5 M8x1P 34 FSIW3210F-4.0P
36	10	6.35	4	2570	6870	58	89	98	18	77	36	72	11	17.5	11 M8x1P 39 FSIW3610F-4.0P
40	5	3.175	4	1180	4390	55	56	88.5	16	72	29	58	9	14	8.5 M8x1P 38 FSIW4005B-4.0P
40	10	6.35	4	2630	7860	64	93	106	18	84	43	86	11	17.5	11 M8x1P 41 FSIW4010F-4.0P
50	10	6.35	4	2770	10290	74	93	116	18	94	42	84	11	17.5	11 M8x1P 50 FSIW5010F-4.0P
63	10	6.35	4	3760	13700	85	98	132	22	107	48	96	14	20	13 M8x1P 60 FSIW6310F-4.0P
80	10	6.35	4	4130	17660	105	98	151	22	127	57	114	14	20	13 M8x1P 73 FSIW8010F-4.0P

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

FSIW

FSDW

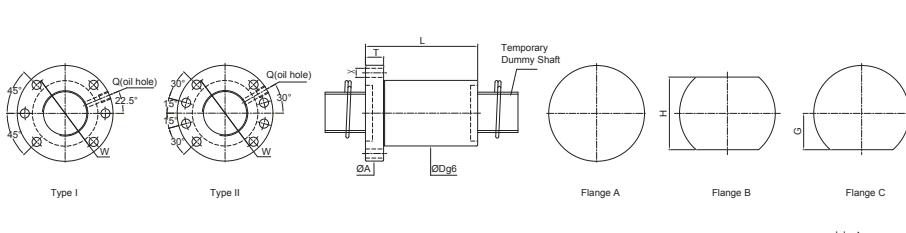

SCREW SIZE	BALL DIA.	EFFECTIVE TURNS	BASIC RATE LOAD (kgf)		BALLNUT DIMENSION										
			O.D.	LEAD	circuit x number of thread	Dynamic (1×10^6 REV) Ca	Static Coam	O.D.	Length	Flange		Oil Hole	Assembly Hole	STIFFNESS	Nut Model NO.
D	L	A	T	W	G	H	X	Y	Z	Q					
12	4	2.381	3×1	410	990	24	28	44	10	34	16	32	I	M6x1P 4.5	13 FSDW1204A-3.0P
14	4	2.381	3×1	460	1210	26	28	46	10	36	17	34	I	M6x1P 4.5	14 FSDW1404A-3.0P
14	4	2.381	4×1	590	1610	32	32	51	10	39	18.5	37	I	M6x1P 5.5	18 FSDW1404A-4.0P
15	5	3.175	3×1	550	1260	29	32	51	10	39	19	38	I	M6x1P 5.5	14 FSDW1405B-3.0P
15	10	3.175	3×1	560	1340	29	47	51	10	39	19	38	I	M6x1P 5.5	15 FSDW1510B-3.0P
15	20	3.175	2×1	370	900	29	58	51	10	39	19	38	I	M6x1P 5.5	10 FSDW1520B-2.0P
16	5	3.175	3×1	600	1460	29	35	51	10	39	19	38	I	M6x1P 5.5	16 FSDW1605B-3.0P
16	10	3.175	3×1	580	1440	29	50	51	10	39	19	38	I	M6x1P 5.5	15 FSDW1610B-3.0P
16	16	3.175	2×1	400	950	29	51	51	10	39	19	38	I	M6x1P 5.5	11 FSDW1616B-2.0P
20	4	2.381	3×1	520	1660	32	28	54	12	42	19	38	I	M6x1P 5.5	18 FSDW2004A-3.0P
20	5	3.175	3×1	670	1860	36	35	62	12	49	24	48	I	M6x1P 6.6	19 FSDW2005B-3.0P
20	10	4.762	3×1	1320	3390	40	52	62	12	51	24	48	I	M6x1P 6.6	21 FSDW2010D-3.0P
20	20	3.175	2×1	450	1200	36	56	62	12	49	24	48	I	M6x1P 6.6	13 FSDW2020B-2.0P
20	40	3.175	1×2	370	1040	36	56	62	12	49	24	48	I	M6x1P 6.6	11 FSDW2040B-1.6P
24	4	2.381	3×1	580	2120	37	28	62	12	49	22	44	I	M6x1P 6.6	21 FSDW2504A-3.0P
24	5	3.175	3×1	740	2350	40	36	62	12	51	24	48	I	M6x1P 6.6	21 FSDW2505B-3.0P
24	10	4.762	4×1	1920	5700	45	63	65	15	54	25.5	51	I	M6x1P 6.6	32 FSDW2510D-4.0P
24	10	6.35	5×1	3380	9550	51	78	84	16	67	32	64	I	M6x1P 9	42 FSDW2510F-5.0P
24	25	3.969	2×1	780	2260	43	71	64	12	51	24	48	I	M6x1P 6.6	16 FSDW2525C-2.0P
28	5	3.175	5×1	1240	4530	43	48	65	12	51	24	48	I	M8x1P 6.6	38 FSDW2805B-5.0P
28	5	3.175	4×1	1080	4130	50	41	87	16	72	34.5	69	I	M8x1P 9	34 FSDW3205B-4.0P
32	10	6.35	5×1	3820	12030	57	78	87	16	72	34.5	69	I	M8x1P 9	50 FSDW3210F-5.0P
32	32	4.762	2×1	1100	3420	53	90	87	16	72	34.5	69	I	M8x1P 9	20 FSDW3232D-2.0P

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

FSDW


PMI Rolled BallScrews
Miniature Series

FSMW




Type I Type II
 Flange A Flange B Flange C

Unit:mm

SCREW SIZE		EFFECTIVE TURNS circuit x number of thread	MODIFIED LOAD CAPACITY (kgf)	BALLNUT DIMENSION												
O.D.	LEAD			BALL DIA.	Dynamic (1x10 ⁶ REV) Cam	Static Coarm	O.D.	Length	Flange			Oil Hole	Assembly Hole	STIFFNESS	Nut Model NO.	
					D	L	A	T	W	G	H	TYPE	Q	X	kgf/mm	
36	10	6.35	3x1	2570	8000	61	58	91	18	76	34	68	II	M6x1P	9	52 FSDW3610F-3.0P
			5x1	4080	13710	61	78									55 FSDW3610F-5.0P
40	5	3.175	4x1	1180	5200	60	42	91	18	76	34	68	II	M8x1P	9	40 FSDW4005B-4.0P
	10	6.35	5x1	4290	15290	65	78	95	18	80	36	72	II	M8x1P	9	59 FSDW4010F-5.0P
	20	6.35	4x1	3480	11990	65	110	98	18	83	37	74	II	M8x1P	11	48 FSDW4020F-4.0P
	40	2x1		1810	5770											25 FSDW4040F-2.0P
50	10	6.35	5x1	4780	19360	75	78	118	18	100	46	92	II	M8x1P	11	70 FSDW5010F-5.0P
63	10	6.35	5x1	5230	24240	88	84	135	22	115	50	110	II	M8x1P	14	84 FSDW6310F-5.0P
	20	6.35	5x1	5320	24930	130										137 FSDW6320F-5.0P
80	10	6.35	5x1	5840	31540	106	80	165	25	145	65	130	II	M8x1P	14	101 FSDW8010F-5.0P

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

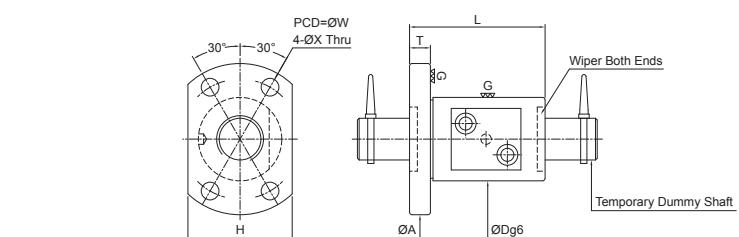


Unit:mm

SCREW SIZE		BALL DIA.	EFFECTIVE TURNS circuit x row	BASIC RATE LOAD (kgf)	BALLNUT DIMENSION											
O.D.	LEAD				Dynamic (1x10 ⁶ REV) Ca	Static Co	O.D.	Length	Flange			Assembly Hole	X			Nut Model NO.
		D	L	A	T	W	H	X								
8	1	0.8	2.5x1	66	140	14	16	27	4	21	18	3.4	1	1.2	2.5x1	FSMW00801X-2.5P
	2	1.2	2.5x1	100	190	16	26	29	4	23	20	3.4	2	2	2.5x1	FSMW00802Y-2.5P
	2.5	2	2.5x1	260	370	18	26	29	4	25	20	3.4	2.5	2	2.5x1	FSMW008IZZ-2.5P
10	2	1.588	2.5x1	220	370	18	28	35	5	27	22	4.5	10	2	2.5x1	FSMW01002K-2.5P

Note: Stiffness of nut: Stiffness values listed above are derived from theoretical formula to the elastic deformation between thread grooves and balls while axial load is 30% dynamic load rating.

Automation Industry Specialized Type

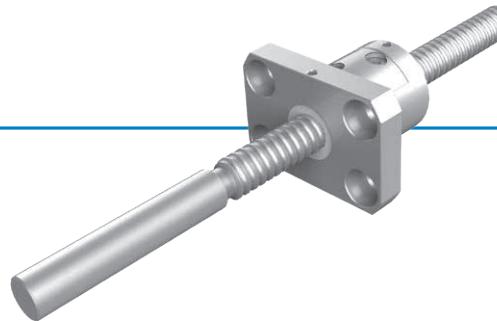

Product Features

High Applicability Shaft Ends

Without heat treating processes on the shaft ends, the center holes on both side will be reserved.

The shaft ends could be easily manufactured to favored size.

Short Delivery

Standardized stock for general specification's thread length and length of blank shaft ends.

Lower Price

The accuracy can be as good as JIS C5 and C7 grade and with standardized axial clearance for the reason that can be cost down and the price will be cheaper.

Nomenclature

PTR 20 10 T3 C7 S -1500

- Overall length
- Axial play
- Grade
- Effective ball circuits
- Lead
- Screw nominal O.D.
- Nut type

Nut type PPR: FSMM(Miniature Series)
PTR: FSDM (End Deflector Series)

Effective ball circuits PPR (Miniature Series)
A1: 1.5×1 circuits / B1: 2.5×1 circuits
PTR (End Deflector Series)
T2: 2 circuits / T3: 3 circuits

Grade	Axial play	Z	T	S	N
	0 (Preload))	0.005 or less	0.010 or less	0.030 or less	
C5	C5Z	C5T	-	-	
C7	-	-	C7S	C7N	

PPR(Miniature Series) - Features

Space Saving

External circulation system, it don't need to have at least one end with complete thread to the end of Ball screw for Ballnut assembly to screw shaft. And the special design of ballnut, so the size of ballnut is same as internal circulation system of ballnut, Space saving.

Circulation

By way of 3D Spline designed pathway for circulation system, and has enhanced the smooth circulation of ball ,that can reduce the wearing and increase the life of ballscrew.

PTR(End Deflector Series) - Features



Space Saving

The ballnut diameter reduces 20%~25% substantially and the length of nut is shorter.



Low Noise

The average and accurate ball circle diameter (BCD) through whole threads make the ballscrews to obtain the stable and consistent drag torque as well as to reduce the noise.
The audio frequency is low and deep due to the designed of plastic circulation system.

TYPE I

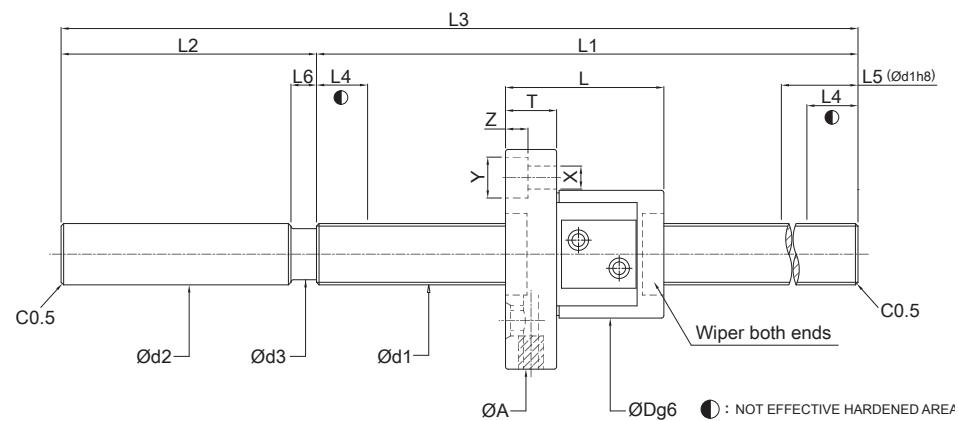
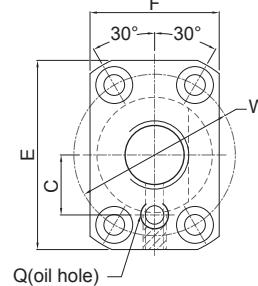


TYPE II

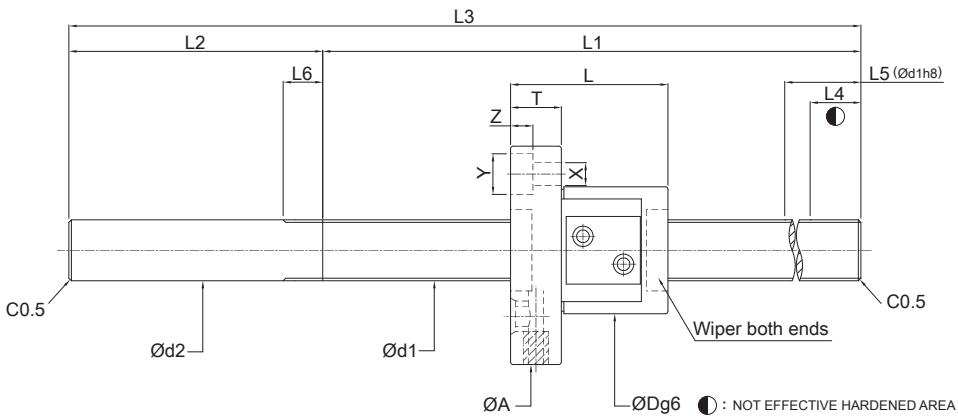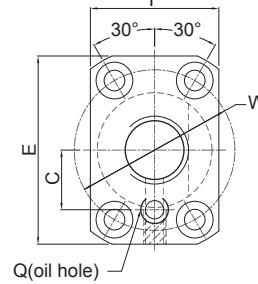

Unit:mm



Model No.	SCREW SIZE		EFFECTIVE TURNS	BASIC RATE LOAD(kgf)							SCREW SHAFT LENGTH				SCREW SHAFT LENGTH		NUT		FLANGE						OIL HOLE		BOLT			
	O.D d1	LEAD		Dynamic (1×10 ⁶ REV.) Ca	Static Co	L1	L2	L3	L4	L5	L6		d2	d3	Dg6	L	A	T	W	E	F	TYPE	C	Q	X	Y	Z			
PPR0802B1C5T-0220	8	2		2.5×1	190	290	160	60	220	10	50	3					10	6.5	20	25	40	6	30	36	25	I	-	-	4.5	8
PPR1202B1C5T-0220	12	2	2.5×1	240	450	160	60	220	10	80	3					12	-	25	31	45	10	35	41	28	II	13	M6	4.5	8	4.4
PPR1202B1C5T-0300						240	300	15	80																					

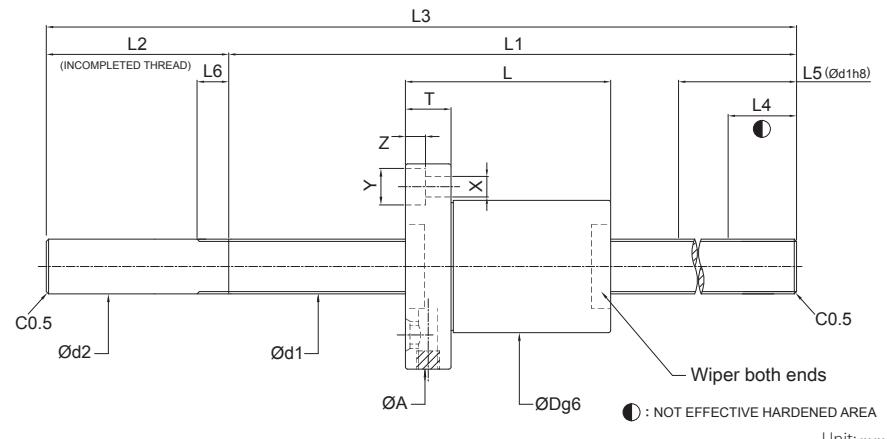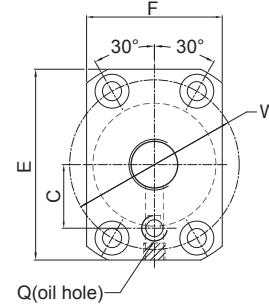

Unit:mm

Model No.	SCREW SIZE		EFFECTIVE TURNS	MODIFIED LOAD CAPACITY(kgf)		SCREW SHAFT LENGTH				SCREW SHAFT LENGTH			NUT		FLANGE				OIL HOLE		BOLT				
	O.D d1	LEAD		Dynamic (1x10 ⁶ REV.) Cam	Static Coam	L1	L2	L3	L4	L5	L6	d2	Dg6	L	A	T	W	E	F	C	Q	X	Y	Z	
PTR120ST3C5T-0300	12	5	3	610	1190	240	60	300	10	150	150	7	12	30	32	50	10	40	45	32	15	M6	4.5	8	4.4
PTR120ST3C5T-0450						390		450	15																
PTR1210T3C5T-0300	12	10	3	590	1160	240	60	300	10	150	150	7	12	30	45	50	10	40	45	32	15	M6	4.5	8	4.4
PTR1210T3C5T-0450						390		450	15																
PTR1220T2C5T-0450	12	20	2	390	770	390	60	450	15	150	150	7	12	30	54	50	12	40	45	32	15	M6	4.5	8	4.4
PTR1220T2C5T-0600						540		600	15																
PTR150ST3C5T-0300						240		300	10																
PTR150ST3C5T-0450						390		450	10																
PTR150ST3C5T-0600	15	5	3	850	1640	540	60	600	10	150	150	7	15	34	35	55	11	45	50	34	18	M6	5.5	9.5	5.4
PTR150ST3C5T-0750						690		750	15																
PTR150ST3C5T-0900						840		900	15																
PTR1510T3C5T-0300						240		300	10																
PTR1510T3C5T-0450						390		450	10																
PTR1510T3C5T-0600	15	10	3	840	1610	540	60	600	10	150	150	7	15	34	47	55	11	45	50	34	18	M6	5.5	9.5	5.4
PTR1510T3C5T-0750						690		750	15																
PTR1510T3C5T-0900						840		900	15																
PTR1510T3C5T-1100						1040		1100	15																
PTR1520T2C5T-0450						390		450	15																
PTR1520T2C5T-0600	15	20	2	560	1050	540		600	15	150	150	7	15	34	58	55	11	45	50	34	18	M6	5.5	9.5	5.4
PTR1520T2C5T-0750						690		750	15																
PTR1520T2C5T-0900						840		900	15																
PTR1520T2C5T-1000						940		1000	15																
PTR1520T2C5T-1100						1040		1100	15																
PTR1520T2C5T-1300						1240		1300	15																
PTR200ST3C5T-0400						320		400	15																
PTR200ST3C5T-0600	20	5	3	1000	2240	520	80	600	15	200	200	7	20	44	35	67	11	55	60	44	22	M6	5.5	9.5	5.4
PTR200ST3C5T-0800						720		800	15																
PTR200ST3C5T-0800						920		1000	15																
PTR2010T3C5T-0600						515		600	15																
PTR2010T3C5T-0800	20	10	3	1530	3280	715	85	800	15	200	200	8	20	46	52	74	13	59	66	46	24	M6	6.6	11	6.5
PTR2010T3C5T-1000						915		1000	15																
PTR2010T3C5T-1300						1215		1300	15																
PTR2010T3C5T-1500						1415		1500	15																

A1-262 Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

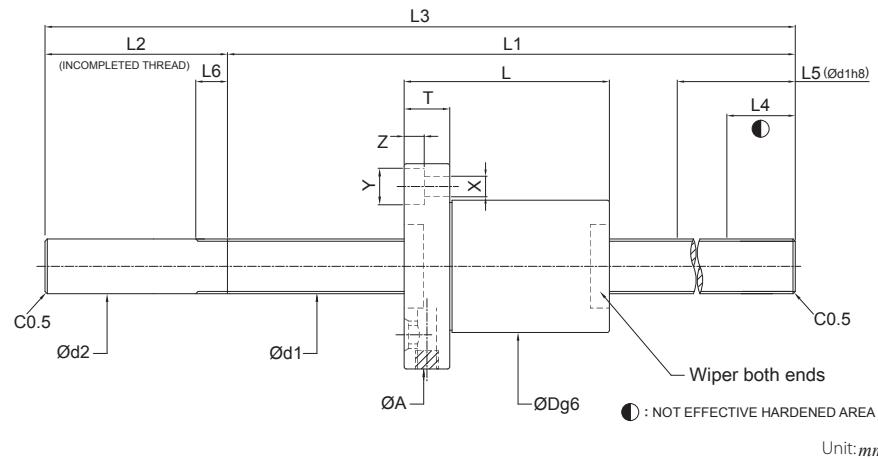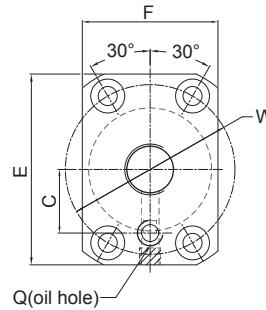

Unit:mm

Model No.	SCREW SIZE		EFFECTIVE TURNS	MODIFIED LOAD CAPACITY(kgf)		SCREW SHAFT LENGTH				SCREW SHAFT LENGTH			NUT		FLANGE				OIL HOLE		BOLT				
	O.D d1	LEAD		Dynamic (1×10 ⁶ REV.) Cam	Static Coam	L1	L2	L3	L4	L5	L6	d2	Dg6	L	A	T	W	E	F	C	Q	X	Y	Z	
PTR1205T3C7S-0300	12	5	3	610	1190	240	60	300	15	180	7	12	30	32	50	10	40	45	32	15	M6	4.5	8	4.4	
PTR1205T3C7S-0450						390		450																	
PTR1210T3C7S-0600	12	10	3	590	1160	540	60	600	15	180	7	12	30	45	50	10	40	45	32	15	M6	4.5	8	4.4	
PTR1220T2C7S-0600	12	20	2	390	770	540	60	600	15	180	7	12	30	54	50	12	40	45	32	15	M6	4.5	8	4.4	
PTR1505T3C7S-0600	15	5	3	850	1640	540	60	600	15	230	7	15	34	35	55	11	45	50	34	18	M6	5.5	9.5	5.4	
PTR1510T3C7S-0450						390		450																	
PTR1510T3C7S-0600						540		600																	
PTR1510T3C7S-0750						690		750																	
PTR1510T3C7S-0900	15	10	3	840	1610	840	60	900	15	230	7	15	34	47	55	10	45	50	34	18	M6	5.5	9.5	5.4	
PTR1510T3C7S-1000						940		1000																	
PTR1510T3C7S-1100						1040		1100																	
PTR1510T3C7S-1300						1240		1300																	
PTR1520T2C7S-0600						540		600																	
PTR1520T2C7S-0750						690		750																	
PTR1520T2C7S-0900	15	20	2	560	1050	840	60	900	15	230	7	15	34	58	55	12	45	50	34	18	M6	5.5	9.5	5.4	
PTR1520T2C7S-1000						940		1000																	
PTR1520T2C7S-1100						1040		1100																	
PTR1520T2C7S-1300						1240		1300																	
PTR2005T3C7S-0600	20	5	3	1000	2240	520	80	600	15	230	7	20	44	35	67	11	55	60	44	22	M6	5.5	9.5	5.4	
PTR2010T3C7S-0600						515		600																	
PTR2010T3C7S-1000	20	10	3	1530	3280	915	85	1000	15	230	8	20	46	52	74	13	59	66	46	24	M6	6.6	11	6.5	
PTR2010T3C7S-1500						1415		1500																	

Note: Coam and Cam are the modified static and dynamic load capacities, calculated according to ISO-3408-5

Service Problems Analysis of Ball Screws

Preface

In recent years, more and more ballscrews are installed in various machines to meet the requirements of higher accuracy and better performance.

Ballscrews become one of the most widely used power transmission components. In CNC machines, ballscrews help improve their positioning accuracy and elongate their service life. Ballscrews are also increasingly used to replace ACME screws in manually operated machines.

A ballscrew is normally preloaded to minimize the backlash of machine movement. Even a high precision ballscrew will not provide good accuracy and long service life if it is not installed properly.

This article discusses primary ballscrew problems and their precautions. Some measuring procedures are also discussed to help users locate the cause of an abnormal backlash.

The Cause and Precautions of Ballscrew Problems

Three major categories of ballscrew problems and their precautions are discussed as follows

Unsmooth operation

Defects from ballscrew manufacturing

- The return tube is not attached to the ball nut appropriately.
- The track surface of the ballscrew spindle or the ball nut is too rough.
- The roundness of the ball nut or the screw shaft is out of tolerance.
- The lead or the pitch circle diameter of the ball nut / the shaft is out of tolerance.

Over-travel

Over-travel can damage the return tube and cause it to collapse or even break. When this happens, the steel balls will not circulate smoothly. They may break and damage the groove on the ball nut or the screw shaft under severe circumstances. Over-travel may happen during set-up or as the result of a limit switch failure or a machine collision. To prevent further damage, an over-traveled ballscrew should be checked or repaired by the manufacturer before it goes back to service.

Misalignment

Radial load exists if the center line of the ball nut's housing and the screw shaft's bearing support

bracket are not aligned properly. The ballscrew unit may bend if this misalignment is too big. An abnormal wear may still happen even if the misalignment is not significant enough to cause a noticeable bending. The accuracy of a ballscrew unit will deteriorate rapidly if it is misaligned. The higher the preload is set in the nut, the more demanding the alignment accuracy is required in the ballscrew.

Foreign objects enter the ball path

Machined chips get in the ball track. The chips or dust generated during machining processes may be trapped in the ball track if wiper kits are not used to keep them away from the surface of the ballscrew unit. This may cause unsmooth operation, deteriorate accuracy and reduce service life.

Damaged return tube

The return tube may collapse and cause the same problems as mentioned above if it is hit heavily during installation.

The ball nut is not mounted properly on the nut housing

Eccentric load exists when the mounted ball nut is tilted or misaligned. If this is the case, the motor current may fluctuate during rotation.

Ballscrew unit is damaged during transportation

- During installation, avoid nuts separating away from screw, otherwise the balls will get out of the nut, that lead to change of the preload and damage of the circulation system and wiper.
- Due to the low friction coefficient, nuts will fall down because of its self weight during vertical deposition; this kind of damage should be avoided, once happened, it should be inspected by manufacturer preventing further damage.

Too much plays

No preload or insufficient preload

The ball nut will rotate and move downward by its self weight when a non-preloaded ballscrew is held vertically with the screw shaft constrained. A significant backlash may exist in a non-preloaded ballscrew unit. Therefore non-preload ballscrews are only used in the machinery, where operation resistance but not positioning accuracy low is the major concerned.

PMI can determine the correct amount of preload based on different applications. We can also preset the amount of preload before shipment. Be sure to clearly specify the operation condition of your application when you order a ballscrew unit.

Inappropriate bearing selection and installation

- Angular ball bearings should be used in ballscrew installation. A ball bearing with high pressure angle specially designed for ballscrew installation is even a better choice. A regular deep groove ball bearing will generate a significant amount of axial play when axially loaded. It should not be used in this application.
- Two lock nuts and a spring washer should be used in the bearing installation to prevent them from getting loose in operation.
- The perpendicularity between the bearing seating face and the thread axis of the bearing locknut on the ballscrew, or the parallelism between the opposite faces of the locknut is out of tolerance causing the bearing to tilt. The thread for bearing lock nut and the seating face of a bearing in the ballscrew journal should be machined in one setting to ensure the perpendicularity. It is even better if they can be ground.
- If the bearing is not attached to the screw shaft properly, it would cause axial play under load. This problem may be caused by the bearing journal of the screw shaft being too long or the non-threaded part of the screw shaft being too short. To solve this problem used the collar.

Parallelism or flatness of the housing surface is out of tolerance

In a machine assembly, a shim bar is frequently located between the housing location surface and the machine body for adjustment purpose. The clearance of table movement may vary at different locations if the parallelism or flatness of any matching component is out of tolerance no matter they are ground or scraped.

The ball nut housing or the bearing housing is not rigid enough

The ball-nut-mounted housing or the bearing-mounted housing may deflect under components' weight or machining load if it is not rigid enough.

The ball nut housing or the bearing housing is not mounted properly

- Ball-nut-seated screws become loose due to vibration and lack of a spring washer.
- Ball-nut-seated screws are not seated firmly because the screws are too long or the thread holes on housing are too short.
- Components may become loose due to vibration or lack of locating pin(s). Solid pins instead of spring pins should be used for locating purpose.
- Not enough locking forces for fixing screw because of too short screws

The motor and the ballscrew spindle are not assembled properly

- There will be a relative rotation between the motor shaft and the ballscrew spindle if the connecting coupling is not installed firmly or the coupling itself is not rigid enough.

- Key is loose in the groove. Any inappropriate match among the hub, key, and key seat may cause these components to generate backlash.
- Driving gears are not engaged properly or driving mechanism is not rigid. A timing belt should be used to prevent slipping if the ballscrew is to be driven by a belt.

Fracture

Broken bearing ball

Cr-Mo steel is the most commonly used material for bearing balls. It takes about 1,400kg (3,080lb) to 1,600kg (3,520lb) to break a steel ball of 3.175 mm (1/8 in) diameter. The temperature of an under-lubricated or non-lubricated ballscrew raises substantially during operation. This temperature raise could make the bearing balls brittle or break which cause damage to the grooves of the ball nut or the ballscrew spindle consequently.

Therefore, lubricant replenishment should be considered during the design process. If an automatic lubricating system is not available, periodical grease replenishment should be scheduled as part of maintenance program

Collapsed or broken return tube

Over-travel of the ball nut or an impact on the return tube could cause the return tube to collapse or break. This may block the path of bearing balls and cause them to slide instead of rolling and break eventually.

Ballscrew shaft end breaks

- Inappropriate design: Sharp corners on the ballscrew spindle should be avoided to reduce local stress concentration.
- Bend of screw shaft journal: The seating surface of the bearing of the ballscrew and the thread axis of the bearing's lock nut are not perpendicular to each other or the opposite sides of the lock nut are not parallel to each other. This will cause the end of screw shaft to bend and eventually break. The amount of deflection at the end of the ballscrew shaft before and after the bearing's lock nut being tightened should not exceed 0.01 mm (0.0004 in).
- Radial force or fluctuating stress: Misalignment in the ballscrew installation creates abnormal fluctuating shear stress and causes the ballscrew to fail prematurely.
- It should be avoided, that the dimension of ball screw shaft end too much different designed from ball screw shaft section area.

Influence of temperature raise on ball screw

During the operation of ball screws, the accuracy of machine drive system will influenced by the raise of the temperature, especially for the high speed and high accuracy machines. Following factors affect the temperature raise of ball screws.

- The Influence of Preload

Increase the rigidity of ball screw nut in order to avoid the lost motion of the machine drive system, that means increase the preload of the nut to a certain standard. Once the nut being preloaded, the friction torque will be increase, making the temperature raised during operation. **PMI** recommended, that the preload force should be 1/3 of the maximal axial load and is not bigger than 10% of the dynamic load, in order to obtain the optimal life time and lower temperature raise effect.

- The Influence of Pretension

The elongation and deformation of ball screws because of heat will deteriorate the position accuracy. The amount of thermal elongation can be calculated by certain formula and compensated by preloading torque. The target value of the Pretension compensation is the negativ T value on the diagram. Too much Pretension will burn the support bearing. Therefor **PMI** recommended, that the pretension should smaller then the Pretension by 5°C; however when the ball screws diameter is over 50mm, it is not suitable for a preloading torque, that means large Pretension forces will be needed when the diameter is large and will burn down the support bearing. **PMI** recommended, that 2~5°C of temperature raise should be used as standard to compensate the value T (about -0.02~-0.06mm every 1000mm of ball screw)

- The Influence of Lubrication

The choice of the lubrication will directly effect the temperature raise of the ball screws. The ball screws of **PMI** should be lubricated by oil or grease. Normally lubrication oil for bearings will be recommended as ball screw lubrication, and grease from lithium soap will be recommended as lubrication grease. The choice of viscosity of the lubrication should be according to the operation speed, the working temperature, and the situation of load.

Low viscosity lubrication should be choosed during high speed and low load situation; high viscosity lubrication during low speed and high load situation. Normally, viscosity range of lubrication will be recommended at 32~68cSt (ISO VG 32~68)(DIN51519) during 40°C, high speed; viscosity range of lubrication will be recommended over 90cSt(ISO VG 90) during 40°C, low speed. By application of high speed and heavy load, force cooling must be used in order to reduce the temperature, and using hollow ball screw or cooling oil though nut to meet the cooling consequent.