


For New Technology Network



**Lower particle generation for
liquid crystal and semiconductor manufacturing equipment**

Ultra Final Series Bearings for Clean Environment

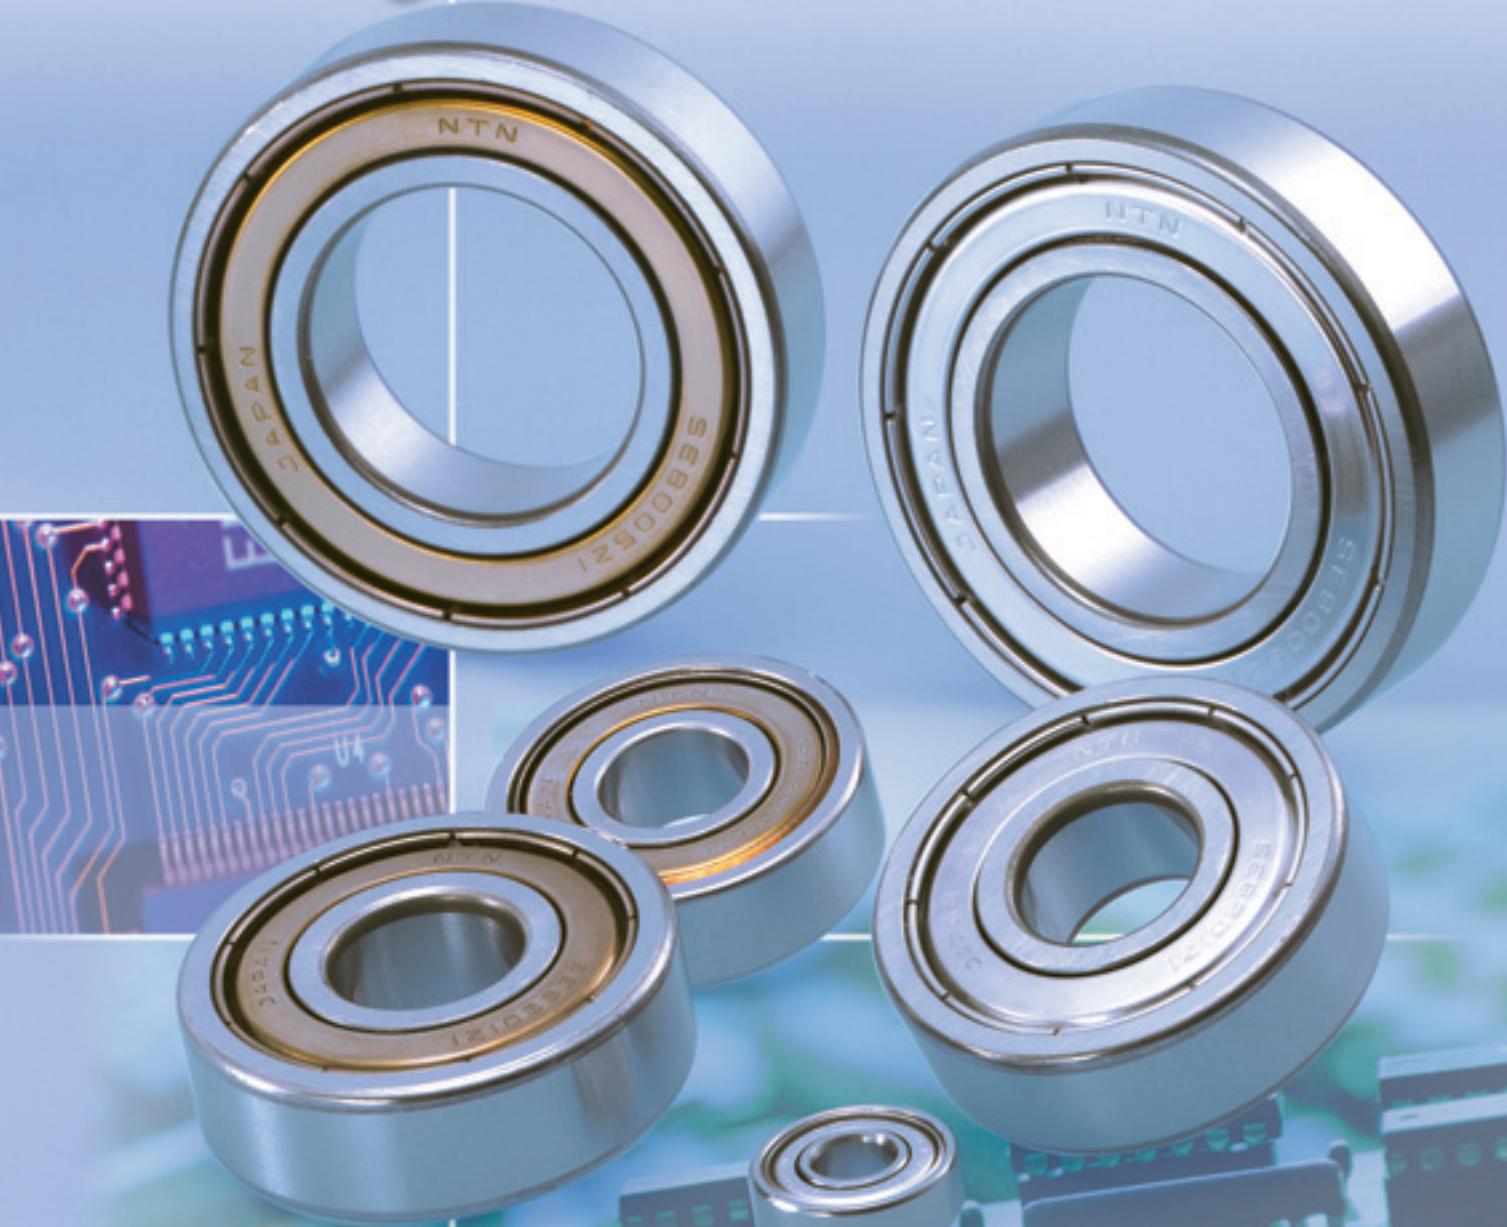

**Ultra Final Series bearings for clean environment with enhanced durability
and lower particle generation at high temperatures, clean rooms and vacuums**

CAT. No. 3028- II /E




CONTENTS

NTN bearings for clean environments


1. Standard specifications of bearings for clean environments	…2
2. Ultra-clean bearings (vacuum / high temperature)	…4
3. Long life ultra-clean bearings (vacuum / high temperature)	…5
4. Bearings with low particle generation grease (atmosphere / room temperature)	…6
5. Bearings with low particle generation grease for vacuum environment (vacuum / high temperature)	…7
6. Dimensions	
6.1 Ultra-clean bearings / part No. examples	…8
6.2 Long life ultra-clean bearings	…9
6.3 Bearings with low particle generation grease	…10
6.4 Bearings with low particle generation grease for vacuum environment	…11
7. Introduction of bearings for special environments	…12
7.1 Cam followers	
7.2 Bearing units · stainless steel series	
7.3 Ball screws	
7.4 Miniature sliding screws with plastic nut	
7.5 Plastic rolling bearings	

NTN bearings for clean environments

Ultra Final Series bearings for clean environments are bearings that produce minimal dust for vacuum equipment, transfer equipment, and equipment for manufacturing semiconductors, liquid crystal and electronic components.

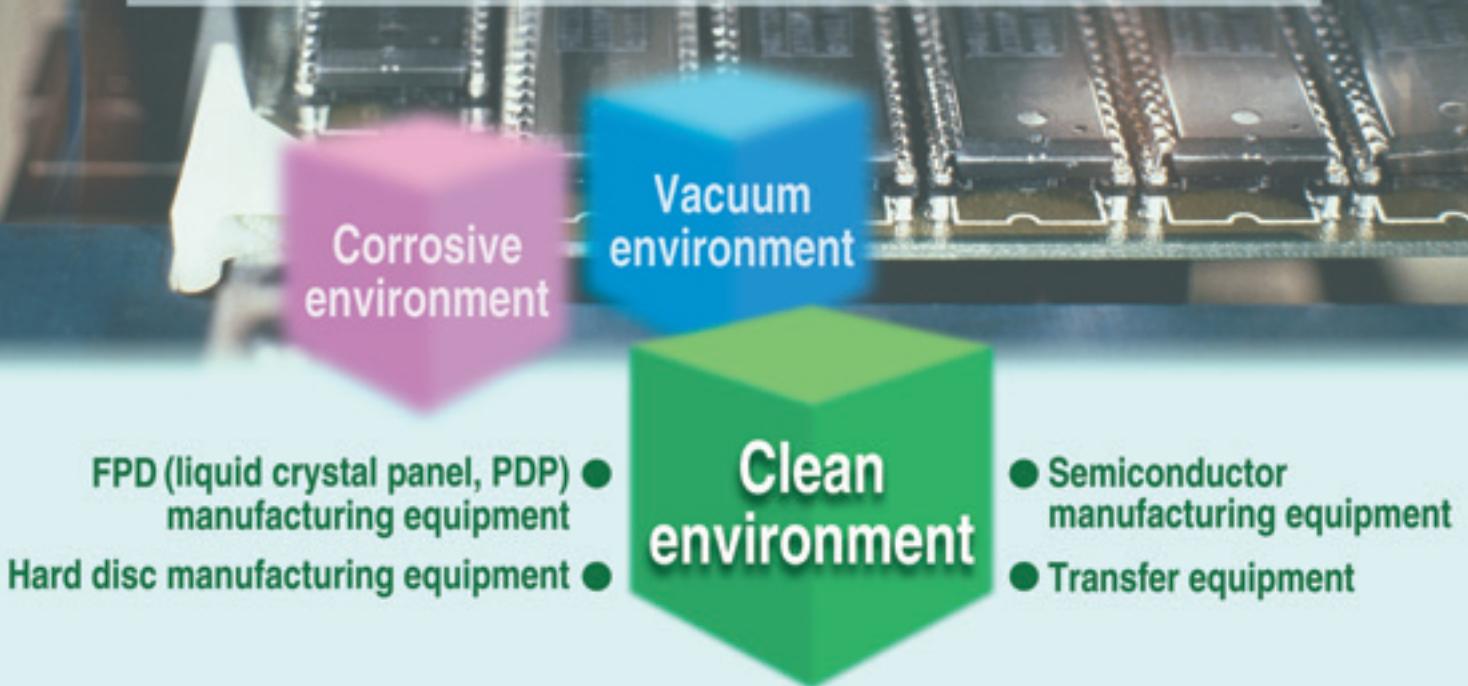

Range of NTN bearings for clean environment

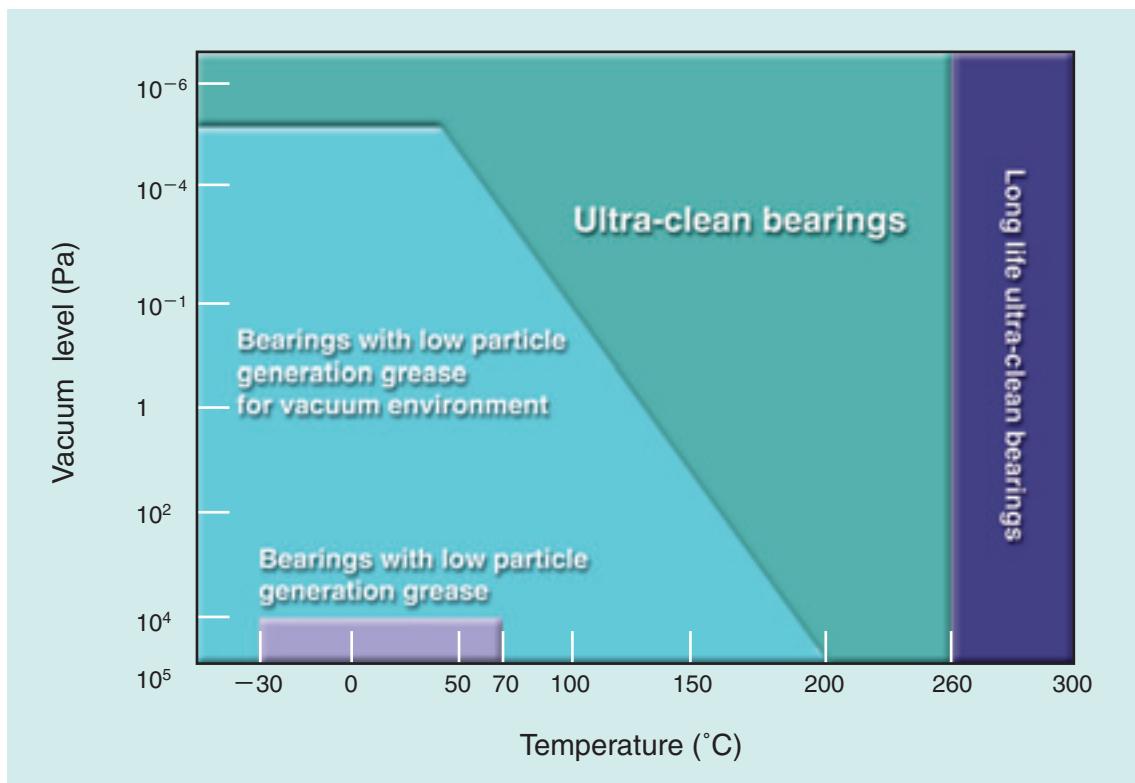

1. Standard specifications of bearings for clean environments

The standard specifications of bearings for clean environments are as follows.
For more details, contact **NTN** Engineering.

Classification of bearings	Appearance	Lubricant	Configuration
Ultra-clean bearings		Special PTFE	 Raceway groove and rolling elements
Long life Ultra-clean bearings		Special PTFE + Special ball	 Raceway groove and rolling elements
Bearings with low particle generation grease		NTN low particle generation grease	
Bearings with low particle generation grease for vacuum environment		Fluorine grease	

Materials				Page of bearing dimension table
Inner and outer rings	Rolling elements	Cage	Shield	
Martensite stainless steel	Martensite stainless steel			Page 8
	Martensite stainless steel + Special ball	Austenite stainless steel	Austenite stainless steel	Page 9
				Page 10
	Martensite stainless steel			Page 11



2. Ultra-clean bearings (vacuum / high temperature)

• Appearance and configuration





• Standard specifications

Inner and outer rings	: Martensite stainless steel
Rolling elements	: Martensite stainless steel
Cage	: Austenite stainless steel
Lubricant	: Special PTFE
Shield	: Austenite stainless steel

• Characteristics of particle generation and durability

- 1) Part No. : 608
- 2) Axial load : 10N
- 3) Rotational speed : 50min^{-1}
- 4) Vacuum level : 10^{-5}Pa

- 1) Part No. : 608
- 2) Axial load : 10N
- 3) Rotational speed : 360min^{-1}
- 4) Vacuum level : 10^{-5}Pa

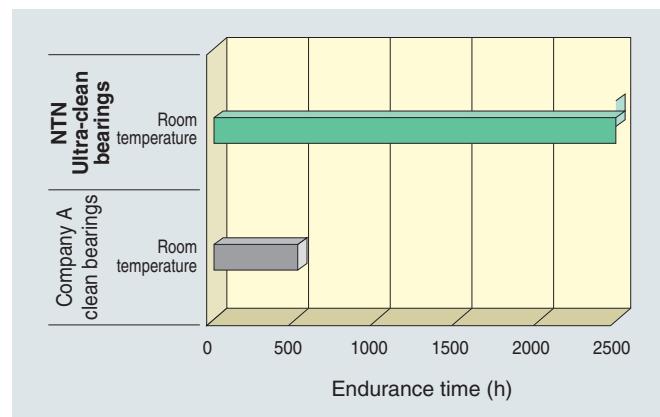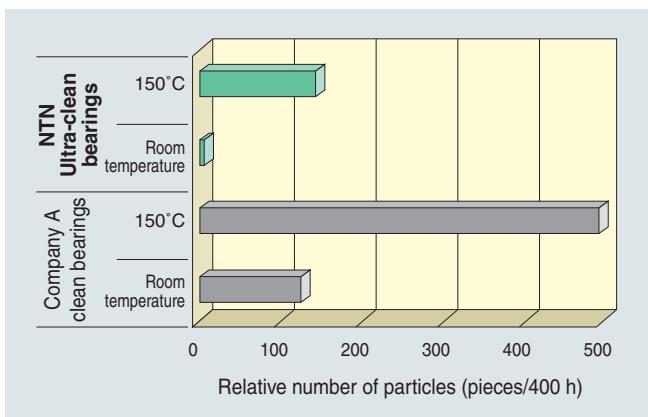

• Features

1. Low particle generation, corrosion resistance.
2. Low torque.
3. Can be used in high temperature and high vacuum conditions.
4. Long life.


• Ex.) part No.

MT2-SEB08J1ZZ1C3/0G

• Operating temperature


~ 260°C

• Application example: Transfer equipment of LCD panel

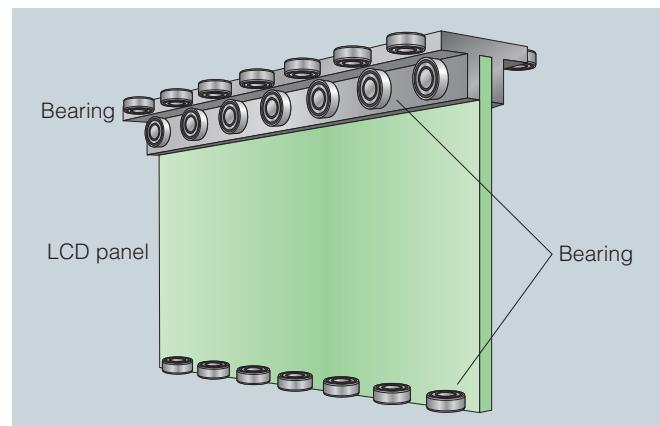

3. Long life ultra-clean bearings (vacuum / high temperature)


• Appearance and configuration

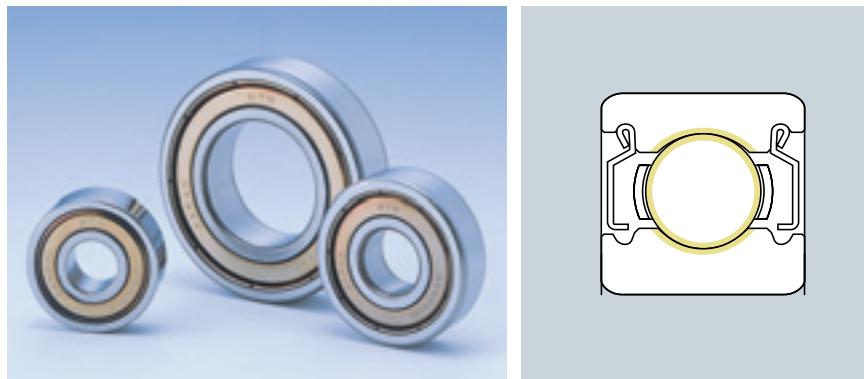

• Standard specifications

Inner and outer rings	: Martensite stainless steel
Rolling elements	: Martensite stainless steel
Cage	: Austenite stainless steel
Lubricant	: Special PTFE and special ball
Shield	: Austenite stainless steel

• Durability

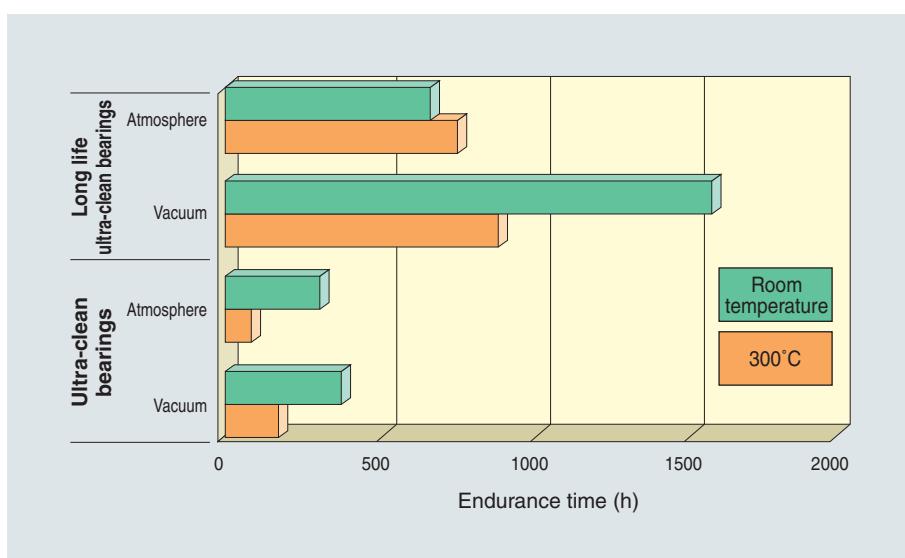

• Features

1. Low particle generation, corrosion resistance.
2. Low torque.
3. Longer life than ultra-clean bearing.


• Ex.) part No.

MT2-5PT-SEB08J1ZZ1C3/0G

• Operating temperature


~300°C

• Application example: Transfer equipment of HD substrate

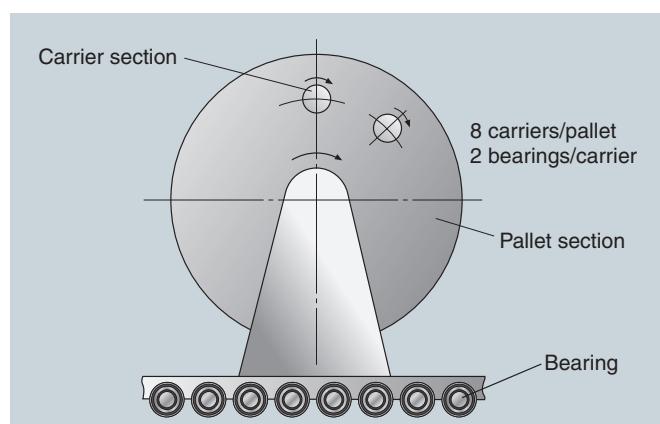

4. Bearings with low particle generation grease (atmosphere / room temperature)

• Appearance and configuration

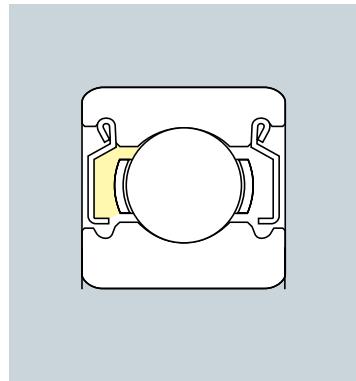



• Standard specifications

Inner and outer rings	: Martensite stainless steel
Rolling elements	: Martensite stainless steel
Cage	: Austenite stainless steel
Lubricant	: NTN low dusting grease ZD-1 (L635)
Shield	: Austenite stainless steel

• Characteristics of particle generation and durability

- 1) Part No. : 608
- 2) Axial load : 10N
- 3) Temperature : Room temperature


- 1) Part No. : 6204
- 2) Axial load : 67N
- 3) Rotational speed : 10000min^{-1}

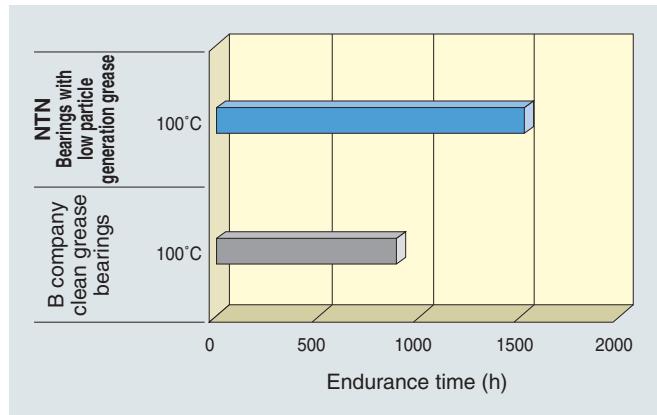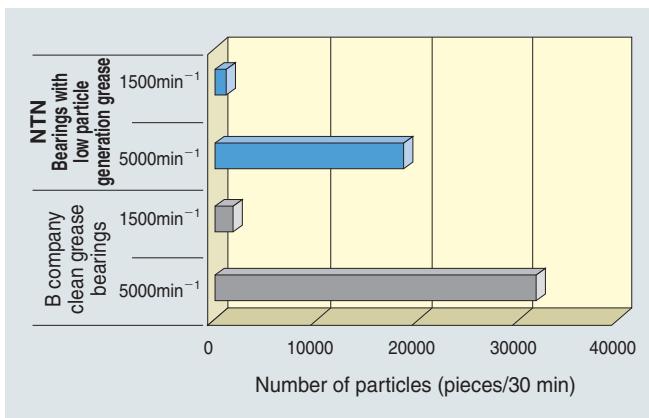

• Features

1. Low particle generation, corrosion resistance.
2. Low torque.
3. Long life.

• Application example: Transfer robot

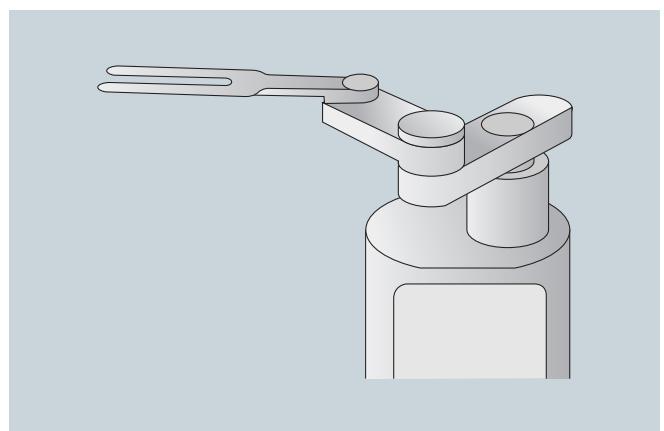

• Ex.) part No.

SEB08J1ZZ1C3/L635QMP


• Operating temperature

~70°C

Cam follower and bearing unit with low particle generation grease are available.

5. Bearings with low particle generation grease for vacuum environment (vacuum / high temperature)


• Appearance and configuration

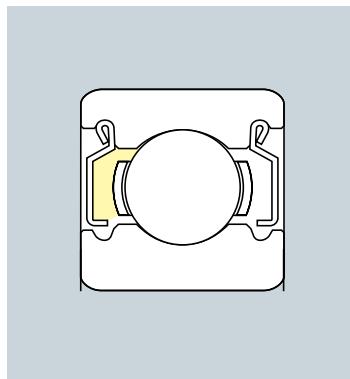

• Standard specifications

Inner and outer rings	: Martensite stainless steel
Rolling elements	: Martensite stainless steel
Cage	: Austenite stainless steel
Lubricant	: Low particle generation grease for vacuum environment (LX23)
Shield	: Austenite stainless steel

• Dusting characteristics of particle generation

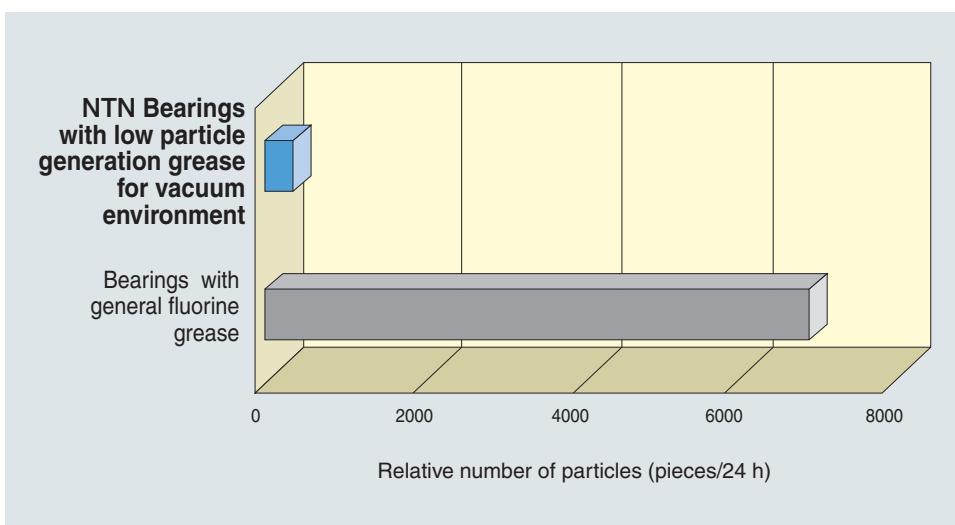

- 1) Part No. : 608
- 2) Axial load : 29.4N
- 3) Rotational speed : 200min^{-1}
- 4) Vacuum level : 10^{-5}Pa


• Features

1. Low particle generation, corrosion resistance.
2. Can be used in high temperature and high vacuum conditions.
3. Long life.

• Ex.) part No.

SEB08J1ZZ1C3/LX23Q109

• Application example: LCD transfer robot

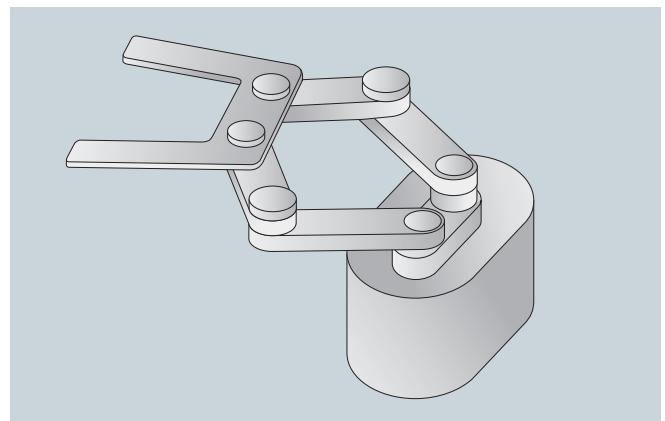


• Operating temperature

~200°C


Cam follower and bearing unit with low particle generation grease for vacuum environment are available.

6. Dimensions

6.1 Ultra-clean bearings

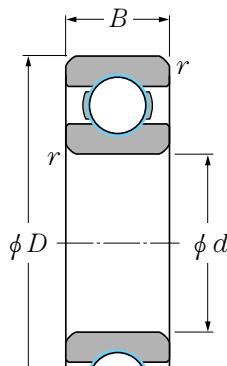

Open type²⁾

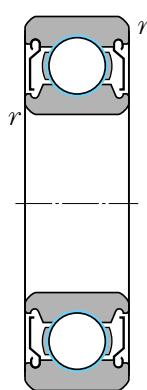

Shielded type

d	D	B	$r_{s \min}^{(1)}$	Main dimensions (mm)		Part No.	Allowable radial load ⁽³⁾	
				N	kgf			
4	8	2	0.08	MT2-F-BC4-8C3 ⁽⁴⁾			1	0.10
	9	2.5	0.1	MT2-F-684AX50C3 ⁽⁴⁾			1.6	0.16
	10	3	0.16	MT2-F-BC4-10C3 ⁽⁴⁾			1.6	0.16
	12	4	0.2	MT2-F-604ZZ1C3 ⁽⁴⁾			2.5	0.26
	13	5	0.2	MT2-SEB24J1ZZ1C3/0G			3.4	0.35
5	10	3	0.15	MT2-F-BC5-10C3 ⁽⁴⁾			1.7	0.17
	13	4	0.2	MT2-SEB95AJ1ZZ1C3/0G			2.6	0.27
	14	5	0.2	MT2-F-605ZZ1C3/0G			3.5	0.36
	16	5	0.3	MT2-SEB25J1ZZ1C3/0G			4	0.41
6	12	3	0.15	MT2-F-BC6-12C3 ⁽⁴⁾			1.8	0.18
	15	5	0.2	MT2-SEB96J1ZZ1C3/0G			3.7	0.38
	17	6	0.3	MT2-SEB06J1ZZ1C3/0G			6.1	0.62
	19	6	0.3	MT2-SEB26J1ZZ1C3/0G			13.1	1.34
7	17	5	0.3	MT2-SEB97J1ZZ1C3/0G			3.9	0.40
	19	6	0.3	MT2-SEB07J1ZZ1C3/0G			10.4	1.06
	22	7	0.3	MT2-SEB27J1ZZ1C3/0G			16.9	1.72
8	19	6	0.3	MT2-SEB98J1ZZ1C3/0G			5.3	0.54
	22	7	0.3	MT2-SEB08J1ZZ1C3/0G			16.9	1.72
	24	8	0.3	MT2-SEB28J1ZZ1C3/0G			24.8	2.53
9.525	22.225	7.142	0.3	MT2-F-R6J1ZZ1C3/0G ⁽⁴⁾			16.5	1.68
10	22	6	0.3	MT2-SEB900J1ZZ1C3/0G			13.4	1.37
	26	8	0.3	MT2-SEB000J1ZZ1C3/0G			24	2.45
	30	9	0.5	MT2-SEB200J1ZZ1C3/0G			27.8	2.84
	35	11	0.6	MT2-SEB300J1ZZ1C3/0G			55.6	5.67
12	24	6	0.3	MT2-SEB901J1ZZ1C3/0G			14.1	1.44
	28	8	0.3	MT2-SEB001J1ZZ1C3/0G			27.8	2.84
	32	10	0.6	MT2-SEB201J1ZZ1C3/0G			37.4	3.82
15	28	7	0.3	MT2-SEB902J1ZZ1C3/0G			17.8	1.82
	32	9	0.3	MT2-SEB002J1ZZ1C3/0G			31.2	3.18
	35	11	0.6	MT2-SEB202J1ZZ1C3/0G			48.8	4.98
17	30	7	0.3	MT2-SEB903JR1XZZ1C3/0G			24.8	2.53
	35	10	0.3	MT2-SEB003J1ZZ1C3/0G			37.1	3.79
	40	12	0.5	MT2-SEB203J1ZZ1C3/0G			62.2	6.35
20	37	9	0.3	MT2-SEB904J1ZZ1C3/0G			36.3	3.70
	42	12	0.6	MT2-SEB004J1ZZ1C3/0G			48	4.90
	47	14	0.5	MT2-SEB204J1ZZ1C3/0G			77.1	7.87
25	42	9	0.3	MT2-SEB905J1ZZ1C3/0G			48	4.90
	47	12	0.6	MT2-SEB005J1ZZ1C3/0G			63.2	6.45
	52	15	0.5	MT2-SEB205J1ZZ1C3/0G			99	10.10
30	47	9	0.3	MT2-SEB906J1ZZ1C3/0G			51.5	5.25
	55	13	1	MT2-SEB006J1ZZ1C3/0G			103.5	10.56
	62	16	0.5	MT2-SEB206J1ZZ1C3/0G			129.4	13.20


1) Minimum allowable chamfer dimension.

2) Groove may be provided for seal in some cases.


3) Allowable radial load is the maximum load when radial load is applied.

4) Allowable temperature for this bearing is 120°C.
For others, 260°C.

Example part No: MT2 – SEB08 J1 ZZ1 C3 / 0G

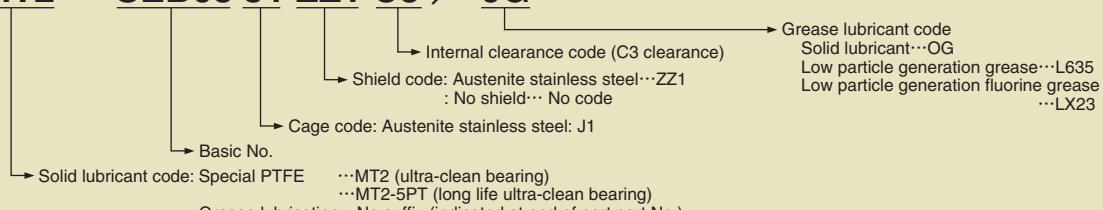

6.2 Long life ultra-clean bearings

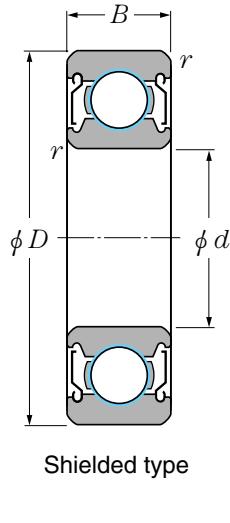


d	D	B	$r_s \text{ min}^{1)}$	Part No.	Allowable radial load ²⁾		Basic load ratings	
					N	kgf	dynamic (N)	static (N)
6	19	6	0.3	MT2-5PT-SEB26J1ZZ1C3/0G	13.1	1.34	2 340	885
7	22	7	0.3	MT2-5PT-SEB27J1ZZ1C3/0G	16.9	1.72	3 350	1 400
8	22	7	0.3	MT2-5PT-SEB08J1ZZ1C3/0G	16.9	1.72	3 350	1 400
	24	8	0.3	MT2-5PT-SEB28J1ZZ1C3/0G	24.8	2.53	4 000	1 590
10	26	8	0.3	MT2-5PT-SEB000J1ZZ1C3/0G	24.0	2.45	4 550	1 960
	30	9	0.6	MT2-5PT-SEB200J1ZZ1C3/0G	27.8	2.84	5 100	2 390
	35	11	0.6	MT2-5PT-SEB300J1ZZ1C3/0G	55.6	5.67	8 200	3 500
12	28	8	0.3	MT2-5PT-SEB001J1ZZ1C3/0G	27.8	2.84	5 100	2 390
	32	10	0.6	MT2-5PT-SEB201J1ZZ1C3/0G	37.4	3.82	6 100	2 750
15	28	7	0.3	MT2-5PT-SEB902J1ZZ1C3/0G	17.3	1.77	3 650	2 000
	32	9	0.3	MT2-5PT-SEB002J1ZZ1C3/0G	31.2	3.18	5 600	2 830
	35	11	0.6	MT2-5PT-SEB202J1ZZ1C3/0G	48.8	4.98	7 750	3 600
17	30	7	0.3	MT2-5PT-SEB903JR1XZZ1C3/0G	22.4	2.29	4 650	2 580
	35	10	0.3	MT2-5PT-SEB003J1ZZ1C3/0G	37.1	3.79	6 800	3 350
	40	12	0.6	MT2-5PT-SEB203J1ZZ1C3/0G	62.2	6.35	9 600	4 600
20	37	9	0.3	MT2-5PT-SEB904J1ZZ1C3/0G	31.9	3.26	6 400	3 700
	42	12	0.6	MT2-5PT-SEB004J1ZZ1C3/0G	48.0	4.90	9 400	5 050
	47	14	1.0	MT2-5PT-SEB204J1ZZ1C3/0G	77.1	7.87	12 800	6 650
25	42	9	0.3	MT2-5PT-SEB905J1ZZ1C3/0G	42.6	4.35	7 050	4 550
	47	12	0.6	MT2-5PT-SEB005J1ZZ1C3/0G	54.0	5.51	10 100	5 850
	52	15	1.0	MT2-5PT-SEB205J1ZZ1C3/0G	99.0	10.01	14 000	7 850
30	47	9	0.3	MT2-5PT-SEB906J1ZZ1C3/0G	46.6	4.75	7 250	5 000
	55	13	1.0	MT2-5PT-SEB006J1ZZ1C3/0G	90.2	9.20	13 200	8 300

1) Minimum allowable chamfer dimension.

2) Allowable radial load is the maximum load when radial load is applied.

6. Dimensions


6.3 Bearings with low particle generation grease

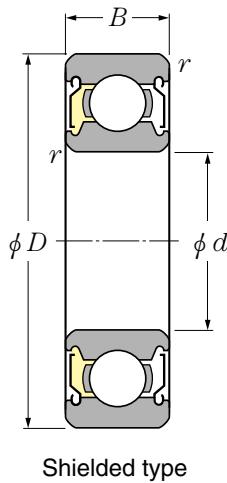

Main dimensions (mm)				Part No.
<i>d</i>	<i>D</i>	<i>B</i>	<i>r_{s min}</i> ¹⁾	
4	12	4	0.2	F-604ZZ1C3/L635QMP
	13	5	0.2	SEB24J1ZZ1C3/L635QMP
5	13	4	0.2	SEB95AJ1ZZ1C3/L635QMP
	14	5	0.2	F-605ZZ1C3/L635QMP
	16	5	0.3	SEB25J1ZZ1C3/L635QMP
6	12	4	0.15	F-WBC6-12ZZ1C3/L635QMP
	15	5	0.2	SEB96J1ZZ1C3/L635QMP
	17	6	0.3	SEB06J1ZZ1C3/L635QMP
	19	6	0.3	SEB26J1ZZ1C3/L635QMP
7	17	5	0.3	SEB97J1ZZ1C3/L635QMP
	19	6	0.3	SEB07J1ZZ1C3/L635QMP
	22	7	0.3	SEB27J1ZZ1C3/L635QMP
8	19	6	0.3	SEB98J1ZZ1C3/L635QMP
	22	7	0.3	SEB08J1ZZ1C3/L635QMP
	24	8	0.3	SEB28AJ1ZZ1C3/L635QMP
9.525	22.225	7.142	0.3	F-R6J1ZZ1C3/L635QMP
10	22	6	0.3	SEB900J1ZZ1C3/L635QMP
	26	8	0.3	SEB000J1ZZ1C3/L635QMP
	30	9	0.5	SEB200J1ZZ1C3/L635QMP
	35	11	0.6	SEB300J1ZZ1C3/L635QMP
12	24	6	0.3	SEB901J1ZZ1C3/L635QMP
	28	8	0.3	SEB001J1ZZ1C3/L635QMP
	32	10	0.6	SEB201J1ZZ1C3/L635QMP
15	28	7	0.3	SEB902J1ZZ1C3/L635QMP
	32	9	0.3	SEB002J1ZZ1C3/L635QMP
	35	11	0.6	SEB202J1ZZ1C3/L635QMP
17	30	7	0.3	SEB903JR1XZZ1C3/L635QMP
	35	10	0.3	SEB003J1ZZ1C3/L635QMP
	40	12	0.5	SEB203J1ZZ1C3/L635QMP
20	37	9	0.3	SEB904J1ZZ1C3/L635QMP
	42	12	0.6	SEB004J1ZZ1C3/L635QMP
	47	14	0.5	SEB204J1ZZ1C3/L635QMP
25	42	9	0.3	SEB905J1ZZ1C3/L635QMP
	47	12	0.6	SEB005J1ZZ1C3/L635QMP
	52	15	0.5	SEB205J1ZZ1C3/L635QMP
30	47	9	0.3	SEB906J1ZZ1C3/L635QMP
	55	13	1	SEB006J1ZZ1C3/L635QMP
	62	16	0.5	aT SEB206J1ZZ1C3/L635QMP

1) Minimum allowable chamfer dimension.

6. 4 Bearings with low particle generation grease for vacuum environment

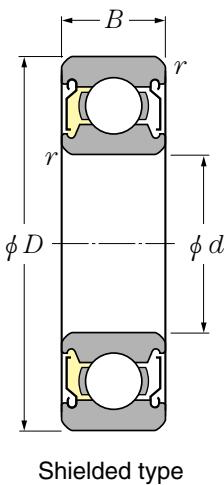

Main dimensions (mm)				Part No.
d	D	B	$r_{s\ min}^{(1)}$	
4	12	4	0.2	F-604ZZ1C3/LX23Q8 ⁽²⁾
	13	5	0.2	SEB24J1ZZ1C3/LX23Q12
5	13	4	0.2	SEB95AJ1ZZ1C3/LX23Q20
	14	5	0.2	F-605ZZ1C3/LX23Q8 ⁽²⁾
	16	5	0.3	SEB25J1ZZ1C3/LX23Q24
6	12	4	0.15	F-WBC6-12ZZ1C3/LX23Q7 ⁽²⁾
	15	5	0.2	SEB96J1ZZ1C3/LX23Q30
	17	6	0.3	SEB06J1ZZ1C3/LX23Q15
	19	6	0.3	SEB26J1ZZ1C3/LX23Q31
7	17	5	0.3	SEB97J1ZZ1C3/LX23Q6
	19	6	0.3	SEB07J1ZZ1C3/LX23Q24
	22	7	0.3	SEB27J1ZZ1C3/LX23Q19
8	19	6	0.3	SEB98J1ZZ1C3/LX23Q22
	22	7	0.3	SEB08J1ZZ1C3/LX23Q109
	24	8	0.3	SEB28J1ZZ1C3/LX23Q5
9.525	22.225	7.142	0.3	F-R6J1ZZ1C3/LX23Q18 ⁽²⁾
10	22	6	0.3	SEB900J1ZZ1C3/LX23Q19
	26	8	0.3	SEB000J1ZZ1C3/LX23Q67
	30	9	0.5	SEB200J1ZZ1C3/LX23Q38
	35	11	0.6	SEB300J1ZZ1C3/LX23Q13
12	24	6	0.3	SEB901J1ZZ1C3/LX23Q14
	28	8	0.3	SEB001J1ZZ1C3/LX23Q48
	32	10	0.6	SEB201J1ZZ1C3/LX23Q59
15	28	7	0.3	SEB902J1ZZ1C3/LX23Q14
	32	9	0.3	SEB002J1ZZ1C3/LX23Q33
	35	11	0.6	SEB202J1ZZ1C3/LX23Q100
17	30	7	0.3	SEB903JR1XZZ1C3/LX23Q10
	35	10	0.3	SEB003J1ZZ1C3/LX23Q34
	40	12	0.5	SEB203J1ZZ1C3/LX23Q91
20	37	9	0.3	SEB904J1ZZ1C3/LX23Q17
	42	12	0.6	SEB004J1ZZ1C3/LX23Q41
	47	14	0.5	SEB204J1ZZ1C3/LX23Q50
25	42	9	0.3	SEB905J1ZZ1C3/LX23Q18
	47	12	0.6	SEB005J1ZZ1C3/LX23Q46
	52	15	0.5	SEB205J1ZZ1C3/LX23Q63
30	47	9	0.3	SEB906J1ZZ1C3/LX23Q12
	55	13	1	SEB006J1ZZ1C3/LX23Q35
	62	16	0.5	SEB206J1ZZ1C3/LX23Q65

1) Minimum allowable chamfer dimension.

2) Allowable temperature for this bearing is 120°C. For others, 200°C.

7. Introduction bearings for special environments

7. 1 Cam followers



CAT. NO. 3604

Features

- NTN offers a rich assortment of stainless steel cam followers that use low dusting grease or solid grease to maintain a clean environment.

7. 3 Ball screws



CAT. NO. 6002

Features

- All parts are made of stainless steel except the dust seal.
- Ball screws are vacuum grease sealed or provided with RAYDENT depending on working environment and conditions.
- Low dusting; can be used in both atmosphere and vacuums.

7. 5 Plastic rolling bearings



CAT. NO. 3023

Features

- Equipped with self-lubricating, corrosion-resistant plastic raceways and glass or ceramic balls.
- Doesn't require lubrication; offers lower torque than sliding bearings.
- Low dusting.

7. 2 Bearing units /Stainless steel series



CAT. NO. 3903/E

Features

- Housing and inner/outer rings are made of stainless steel. Maintain a clean environment by using low particle generation grease or bearings with solid grease.

7. 4 Miniature sliding screws with plastic nut



CAT. NO. 5112/E

Features

- Combination of nuts made of BEAREE AS5000 and screws made of stainless steel (SUS304) provides resistance to various environments, like corrosion and high temperature etc.
- Less noise than stainless steel ball screws.