
Technical data


NK17/20R

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

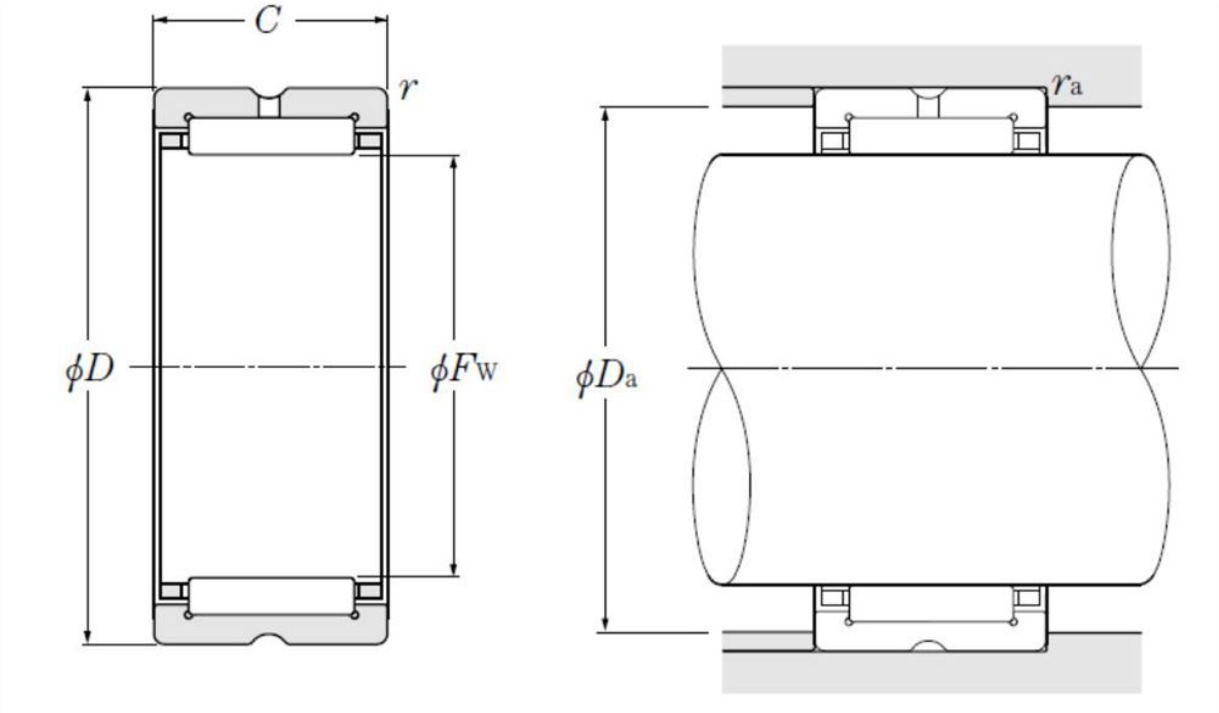

Product definition

Fw	17 mm
D	25 mm
C	20 mm
rs min	0.3 mm
Dw	2.5 mm
Lw	16.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.03 kg
Brand	NTN

Product performance

Cr	15.4 kN
C0r	20.4 kN
Nlim (grease)	15,000 Tr/min
Nlim (oil)	22,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.67 Hz
Characteristic outer ring frequency, BPF0	6.1 Hz
Characteristic inner ring frequency, BPFI	7.9 Hz

Abutment dimensions

Da max	23 mm
ras max	0.3 mm