# Technical data


## SUC.207-22

Insert bearings



stainless steel insert, spherical outer diameter with locking pin, fixing by socket set screw, seal with slinger, food grease

## Visual(s)

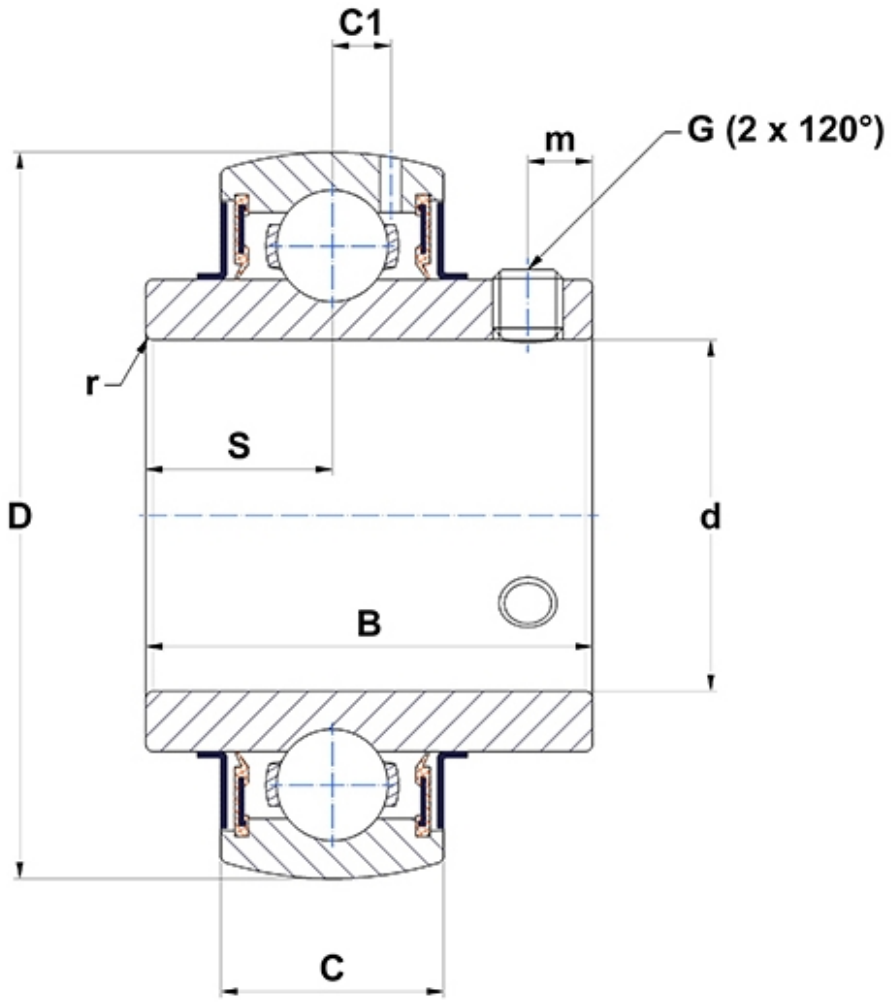

## Product definition

| | |
|---|---|
| **B** | 42.9 mm |
| **C** | 20 mm |
| **C1** | 5.7 mm |
| **d** | 34.92 mm |
| **D** | 72 mm |
| **G** | 5/16-24UNF |
| **m** | 6.5 mm |
| **r** | 1 |
| **S** | 17.5 mm |
| **SW** | 3.97 mm |

## Product performance

| | |
|---|---|
| **C** | 20.1 kN |
| **C0** | 15.6 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.47 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |