Technical datasheet


NJ.209.E.G15.J30


Single row cylindrical roller bearings



Single row cylindrical roller bearing, single direction for axial loads, separable, polyamide cage.

Visual(s)

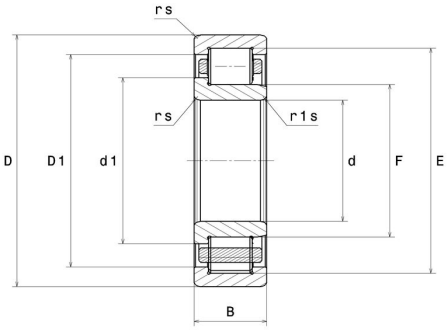

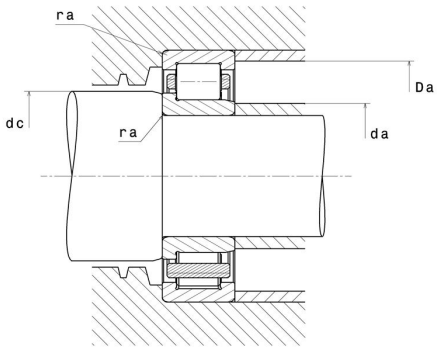

Product definition

d	45 mm
D	85 mm
B	19 mm
E	76.5 mm
F	54.5 mm
d1	59 mm
D1	73.3 mm
rs min	1.1 mm
r1s min	1.1 mm
Radial clearance class	C3
Mass (without HJ ring)	0.44 kg
Brand	SNR

Product performance

Dynamic load, C	64.8 kN
Static load, C0	68.9 kN
Fatigue limit load, Cu	8.4 kN
Nref	6,900 rpm
Nlim	9,900 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.79 Hz
Characteristic outer ring frequency, BPF0	6.24 Hz
Characteristic inner ring frequency, BPFI	8.76 Hz

Abutment dimensions

da min	51.5 mm
da max	54 mm
db min	57 mm
dc min	61 mm
Da max	78.5 mm
ra max	1 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$P = Fr$

Equivalent static radial load

$P_0 = Fr$