
Technical datasheet


NJ214.EG15C4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, polyamide cage.

Visual(s)

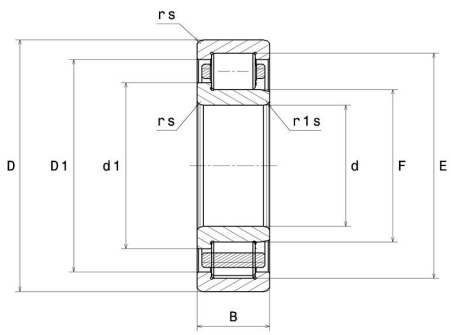

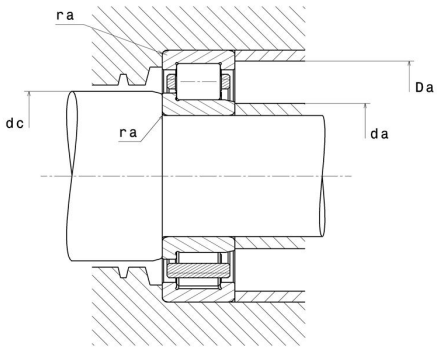

Product definition

d	70 mm
D	125 mm
B	24 mm
E	113.5 mm
F	83.5 mm
d1	89.4 mm
D1	109.4 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	C4
Mass (without HJ ring)	1.18 kg
Brand	SNR

Product performance

Dynamic load, C	119 kN
Static load, C0	137 kN
Fatigue limit load, Cu	16.7 kN
Nref	4,700 rpm
Nlim	6,500 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.41 Hz
Characteristic outer ring frequency, BPF0	7.21 Hz
Characteristic inner ring frequency, BPFI	9.79 Hz

Abutment dimensions

da min	78 mm
da max	82 mm
db min	86 mm
dc min	92 mm
Da max	117 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = Fr$

Equivalent static radial load

$P_0 = Fr$