Technical data


4T-30212


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

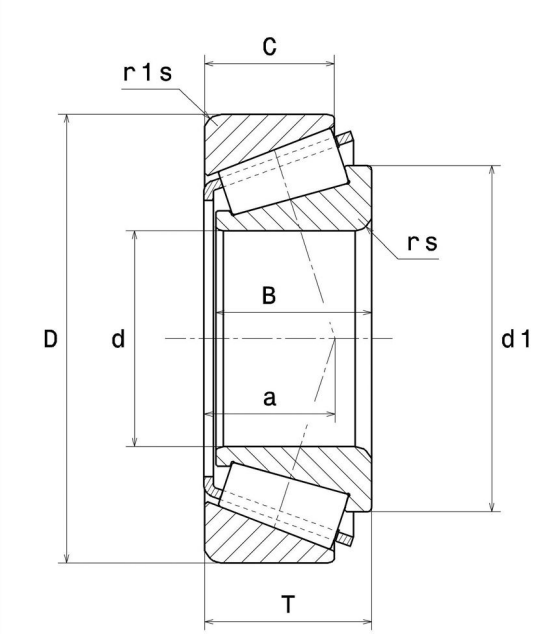

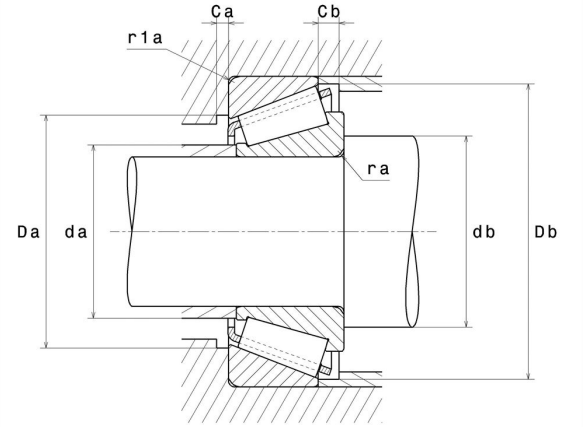

Product definition

d	60 mm
D	110 mm
B	22 mm
C	19 mm
T	23.75 mm
d1	82 mm
a	22 mm
rs min	2 mm
r1s min	1.5 mm
e	0.4
Y2	1.48
Y0	0.81
Mass	0.95 kg
ISO 355 reference	T3EB060
Brand	NTN

Product performance

Dynamic load, C	105 kN
Rating life coefficient, A2	1.4
Static load, C0	125 kN
Fatigue limit load, Cu	15.2 kN
Nlim (oil)	4,500 Tr/min
Nlim (grease)	3,400 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.36 Hz
Characteristic outer ring frequency, BPF0	8.09 Hz
Characteristic inner ring frequency, BPFI	10.91 Hz

Abutment dimensions

da max	70 mm
db min	70 mm
Da min	96 mm
Da max	101.5 mm
Db min	103 mm
Ca min	4 mm
Cb min	4.5 mm
ra max	2 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table