Technical data


4T-HH224334/HH224310

Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

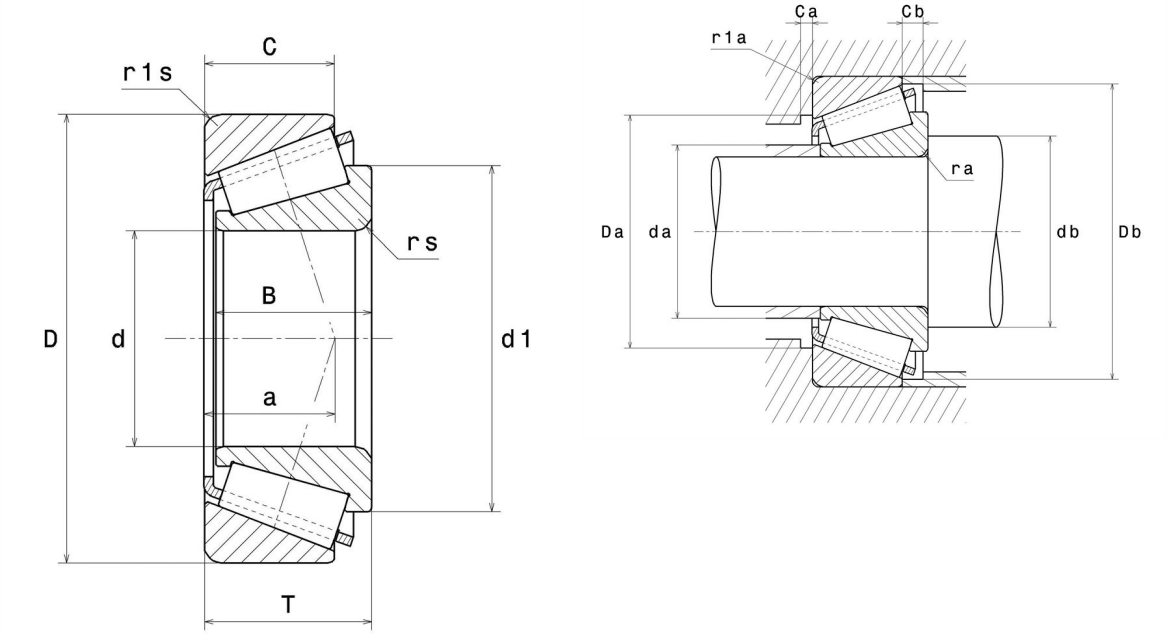

Product definition

d	99.97 mm
D	212.72 mm
B	66.68 mm
C	53.98 mm
T	66.68 mm
d1	159 mm
a	47.78 mm
e	0.33
Y2	1.84
Y0	1.01
Mass	11.5 kg
Brand	NTN

Product performance

Dynamic load, C	575 kN
Rating life coefficient, A2	1.4
Static load, C0	810 kN
Fatigue limit load, Cu	85.3 kN
Nlim (oil)	2,300 Tr/min
Nlim (grease)	1,700 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.81 Hz
Characteristic outer ring frequency, BPF0	7.11 Hz
Characteristic inner ring frequency, BPFI	9.89 Hz

Abutment dimensions

ra max	3.5 mm
r1a max	3.3 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table