Technical datasheet


4T-JM716649/JM716610PK


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

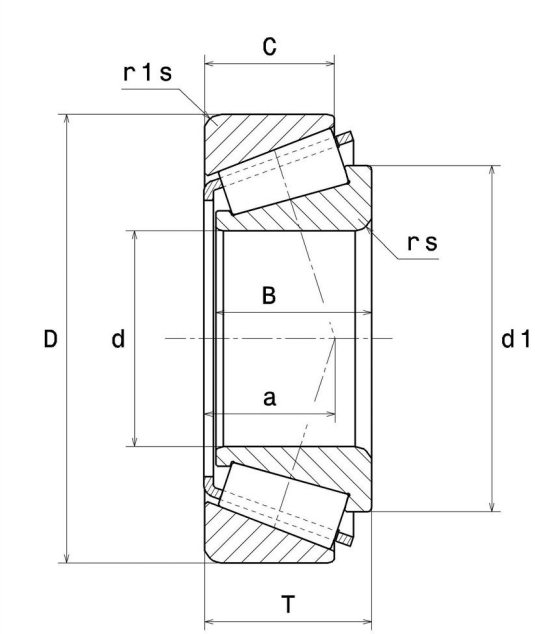

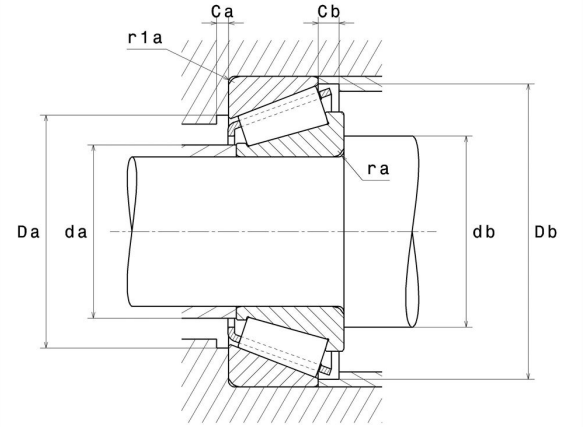

Product definition

d	85 mm
D	130 mm
B	29 mm
C	24 mm
T	30 mm
a	29.8 mm
rs min	3 mm
r1s min	2.5 mm
e	0.44
Y2	1.35
Y0	0.74
Mass	1.35 kg
Brand	NTN

Product performance

Dynamic load, C	135 kN
Rating life coefficient, A2	1.4
Static load, C0	214 kN
Nlim (oil)	3,500 rpm
Nlim (grease)	2,600 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10 Hz
Characteristic outer ring frequency, BPF0	11.77 Hz
Characteristic inner ring frequency, BPFI	14.23 Hz

Abutment dimensions

ra max	3 mm
r1a max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table