Technical data


4T-LM67048L/LM67010


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

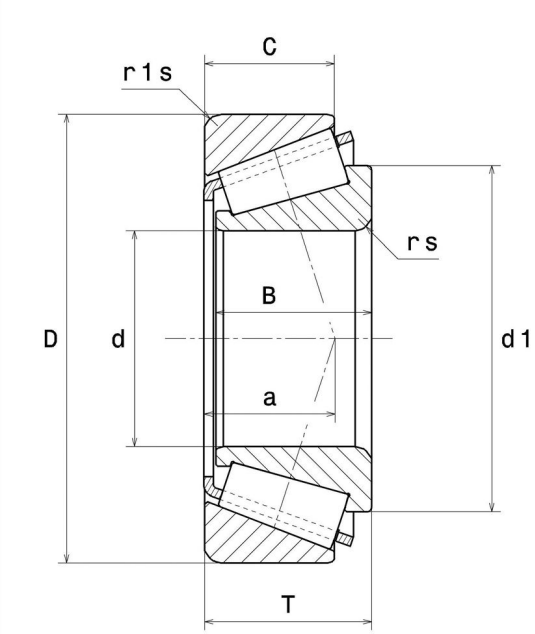

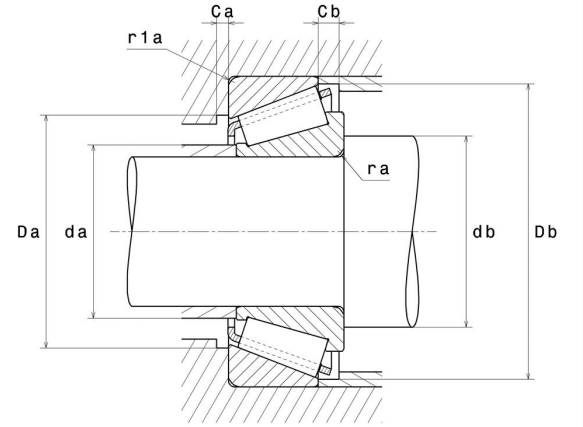

Product definition

d	31.75 mm
D	59.13 mm
B	16.76 mm
C	11.81 mm
T	15.88 mm
a	13.1 mm
rs min	3.5 mm
r1s min	1.3 mm
e	0.41
Y2	1.46
Y0	0.8
Mass	0.18 kg
Brand	NTN

Product performance

Dynamic load, C	34.5 kN
Rating life coefficient, A2	1.4
Static load, C0	41 kN
Nlim (oil)	8,400 Tr/min
Nlim (grease)	6,300 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

ra max	1.8 mm
r1a max	1.3 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table