Technical data


4T-M238849/M238810


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

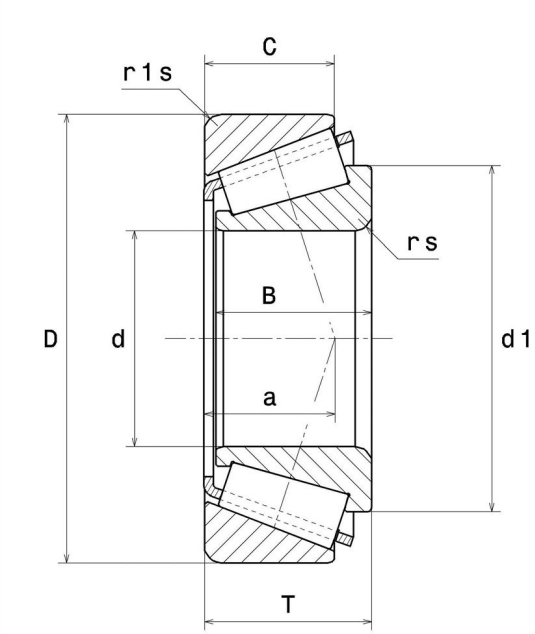

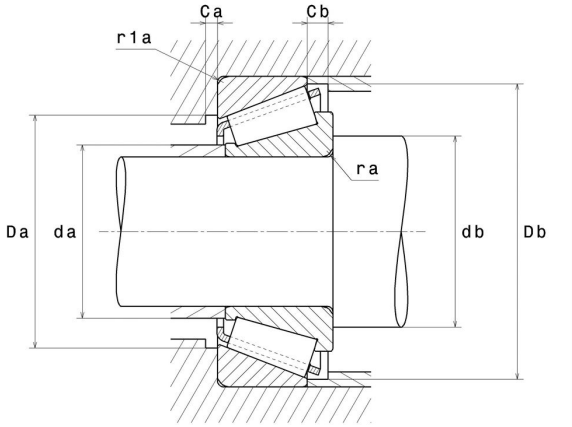

Product definition

d	187.32 mm
D	269.88 mm
B	55.56 mm
C	42.86 mm
T	55.56 mm
a	49.6 mm
rs min	3.56 mm
r1s min	3.3 mm
e	0.33
Y2	1.8
Y0	0.99
Mass	9.88 kg
Brand	NTN

Product performance

Dynamic load, C	460 kN
Rating life coefficient, A2	1.4
Static load, C0	875 kN
Nlim (oil)	1,600 Tr/min
Nlim (grease)	1,200 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.09 Hz
Characteristic outer ring frequency, BPF0	14.72 Hz
Characteristic inner ring frequency, BPFI	17.28 Hz

Abutment dimensions

ra max	3.5 mm
r1a max	3.3 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table