

Technical data


6205.N.R.EE

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, contact seals on both sides

ULTAGE

Visual(s)

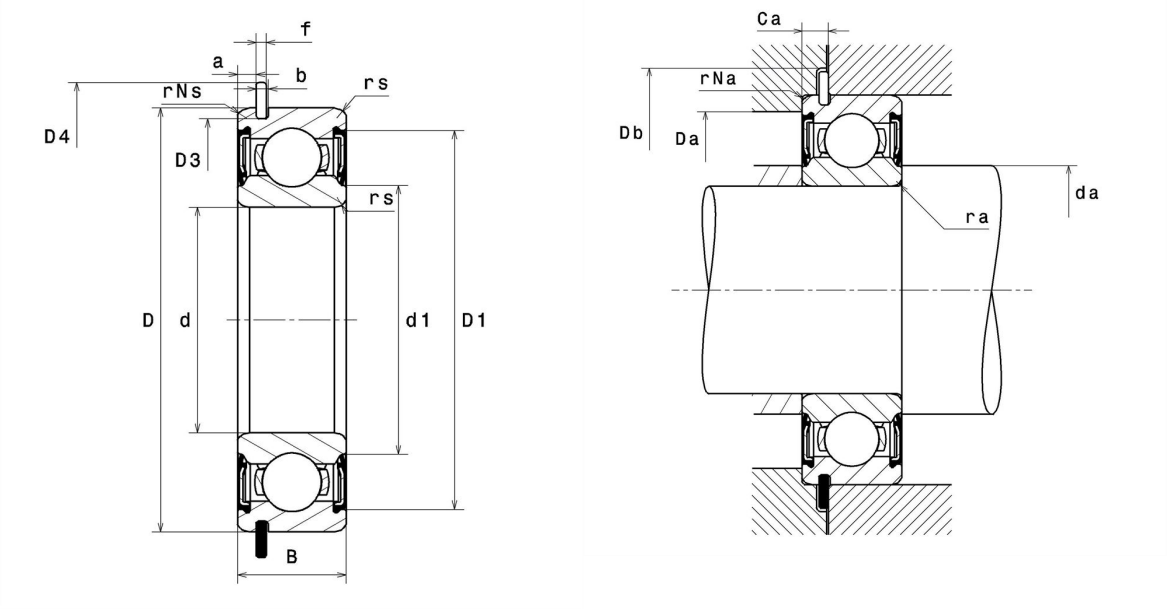

Product definition

d	25 mm
D	52 mm
B	15 mm
d1	31.8 mm
D1	49.2 mm
a min	2.31 mm
a max	2.46 mm
Ca min	3.33 mm
Ca max	3.58 mm
rs min	1 mm
rNs min	0.5 mm
D3 max	49.73 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	57.9 mm
f	1.07 mm
Snap ring reference	R52
Associated sleeve reference	0001.7
Radial clearance class	CN
Mass	0.13 kg
Brand	SNR

Product performance

Dynamic load, C	0.45 kN
Static load, C0	7.9 kN
Fatigue limit load, Cu	0.45 kN
f0	13.9
Nref	14 Tr/min
Nlim	9,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.72 Hz
Characteristic outer ring frequency, BPF0	3.58 Hz
Characteristic inner ring frequency, BPFI	5.42 Hz

Abutment dimensions

da min	30 mm
da max	31.8 mm
db min	9,000 mm
Ce min	0 mm
Da max	47 mm
ra max	1 mm
rNa max	0.5 mm
Db min	58.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr