

Technical datasheet

8E-NK15X25X12-3

Needle roller bearing, machined-ring, without inner ring



Visual(s)

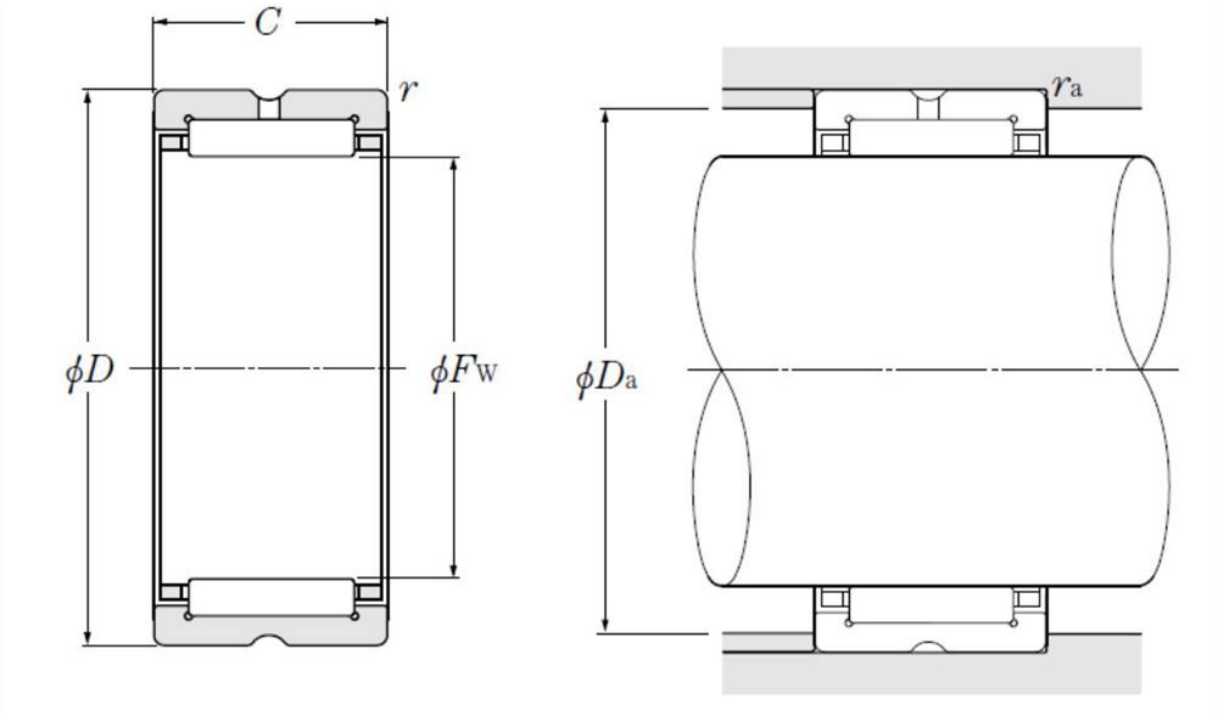

Product definition

Fw	15 mm
D	25 mm
C	12 mm
rs min	0 mm
Dw	2.5 mm
Lw	7.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P6
Mass	0.02 kg
Brand	NTN

Product performance

Cr	0 kN
C0r	0 kN
Nlim (grease)	0 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.86 Hz
Characteristic outer ring frequency, BPF0	6.43 Hz
Characteristic inner ring frequency, BPFI	8.57 Hz