

Technical data

HMK1626CLLT/3AS

Drawn cup needle roller bearings, opened end



Visual(s)

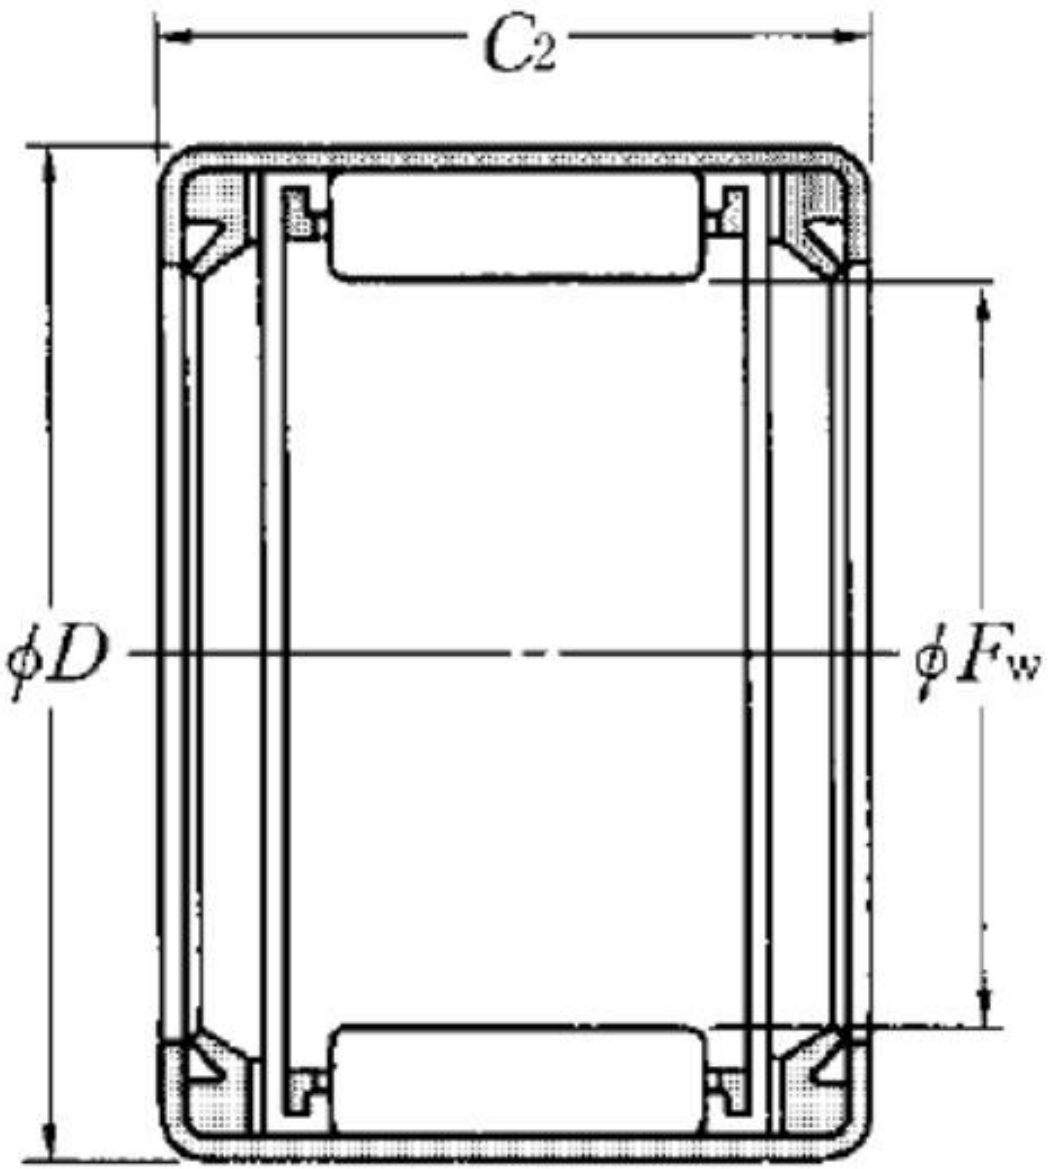

Product definition

Fw	16 mm
D	24 mm
C2	26 mm
Dw	3 mm
Lw	15.3 mm
Lubrication hole on outer ring	Non/No
Mass	0.03 kg

Product performance

Cr	15.6 kN
C0r	18.2 kN
Nlim (grease)	10,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.18 Hz
Characteristic outer ring frequency, BPF0	4.63 Hz
Characteristic inner ring frequency, BPFI	6.37 Hz