
Technical data


NA49/32R

Needle roller bearing, machined-ring, with inner ring



Needle roller bearing, machined-rings, with inner ring, double-side ribs, lubrication hole

Visual(s)

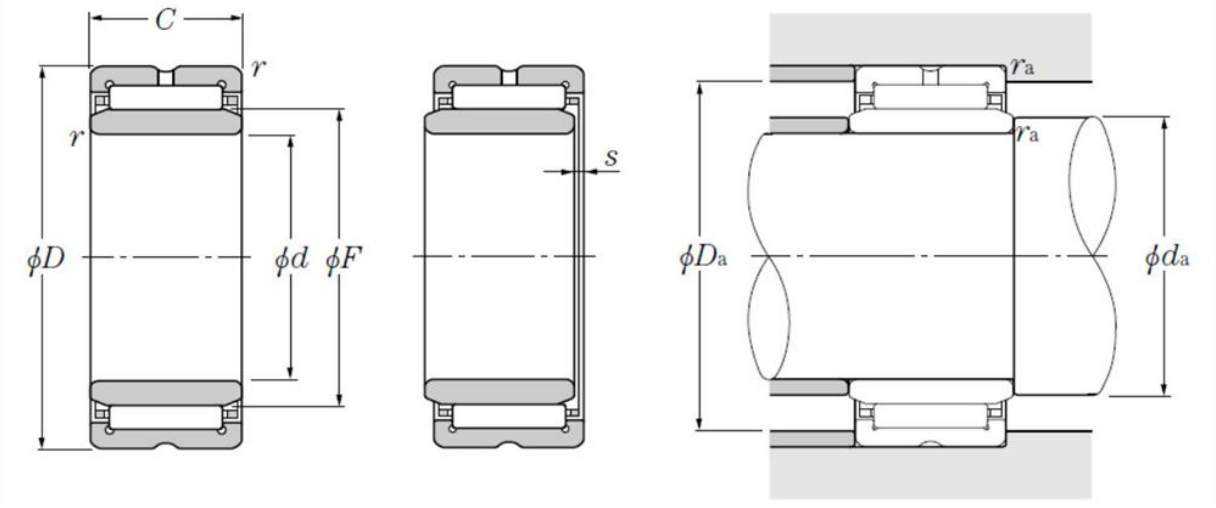

Product definition

d	32 mm
D	52 mm
C	20 mm
F	40 mm
rs min	0.6 mm
s max	0.8 mm
Dw	4 mm
Lw	15.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Lubrication hole on inner ring	Non/No
Radial clearance class	CN
Precision class	P0
Mass	0.16 kg
Brand	NTN

Product performance

Cr	31.5 kN
C0r	47.5 kN
Nlim (grease)	6,500 Tr/min
Nlim (oil)	10,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.91 Hz
Characteristic outer ring frequency, BPF0	9.54 Hz
Characteristic inner ring frequency, BPFI	11.46 Hz

Abutment dimensions

da min	36 mm
Da max	48 mm
ras max	0.6 mm