

Technical datasheet

NUKR150/3AS

Cam follower with shaft



Visual(s)

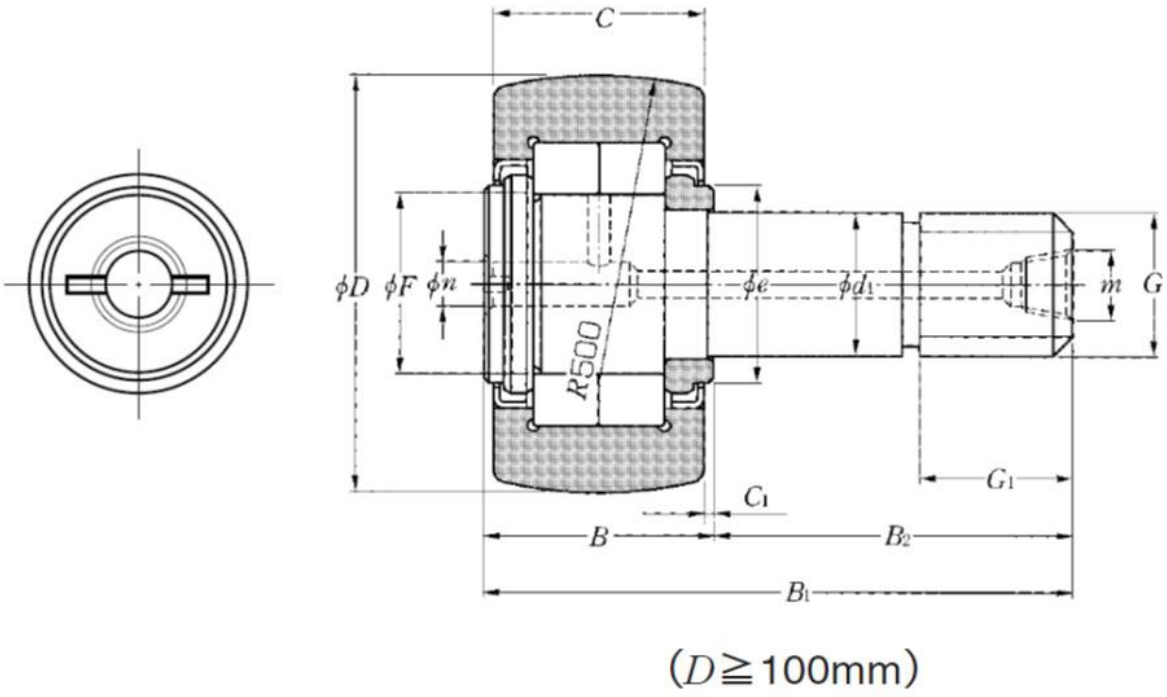

Product definition

D	150 mm
d1	52 mm
C	60 mm
F	75.5 mm
B	63 mm
B1	170 mm
B2	107 mm
G	M52X1.5
G1	52 mm
C1	1.5 mm
n	8 mm
m	PT 1/8
e	85.5 mm
R	500 mm
Dw	14 mm
Lw	20 mm
Maximum tightening torque	1,950 Nm
Bearing with/without cage	Sans
Radial clearance class	CN
Precision class	P0
Mass	9.7 kg
Brand	NTN

Product performance

Cr	258 kN
C0r	380 kN
Track load capacity spherical outer ring	22 kN
Nlim (grease)	1,300 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.24 Hz
Characteristic outer ring frequency, BPF0	8.44 Hz
Characteristic inner ring frequency, BPFI	11.56 Hz