


Technical data

RNA0-22X30X26ZW

Needle roller bearing, machined-ring, separable, without inner ring

Visual(s)

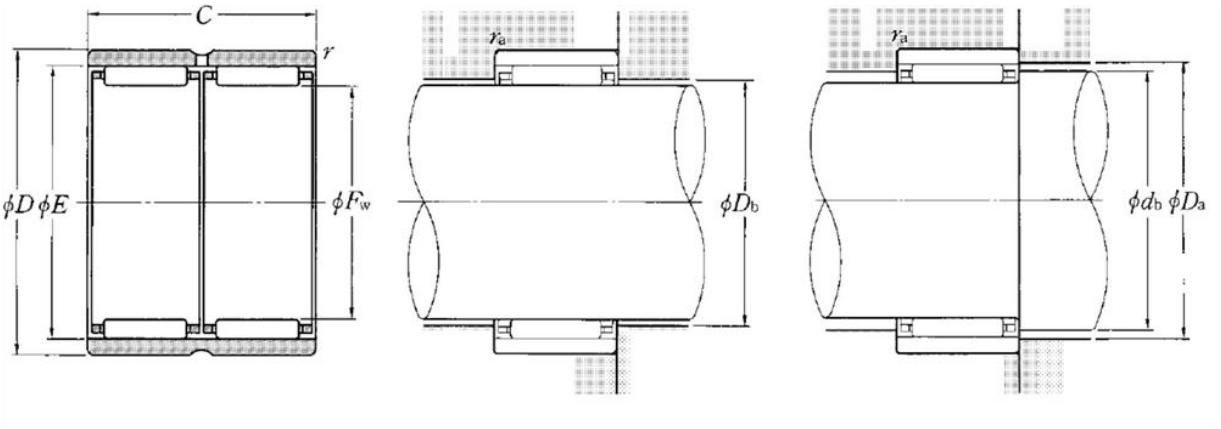

Product definition

Fw	22 mm
D	30 mm
C	26 mm
E	26 mm
rs min	0.3 mm
Dw	2 mm
Lw	9.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.05 kg
Brand	NTN

Product performance

Cr	17.5 kN
C0r	30.5 kN
Nlim (grease)	12,000 Tr/min
Nlim (oil)	18,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.92 Hz
Characteristic outer ring frequency, BPF0	9.17 Hz
Characteristic inner ring frequency, BPFI	10.83 Hz

Abutment dimensions

db	25.6 mm
Da max	28 mm
Db	22.4 mm
ras max	0.3 mm