

# Technical data

## RNA0-25X35X26ZW

Needle roller bearing, machined-ring, separable, without inner ring



## Visual(s)

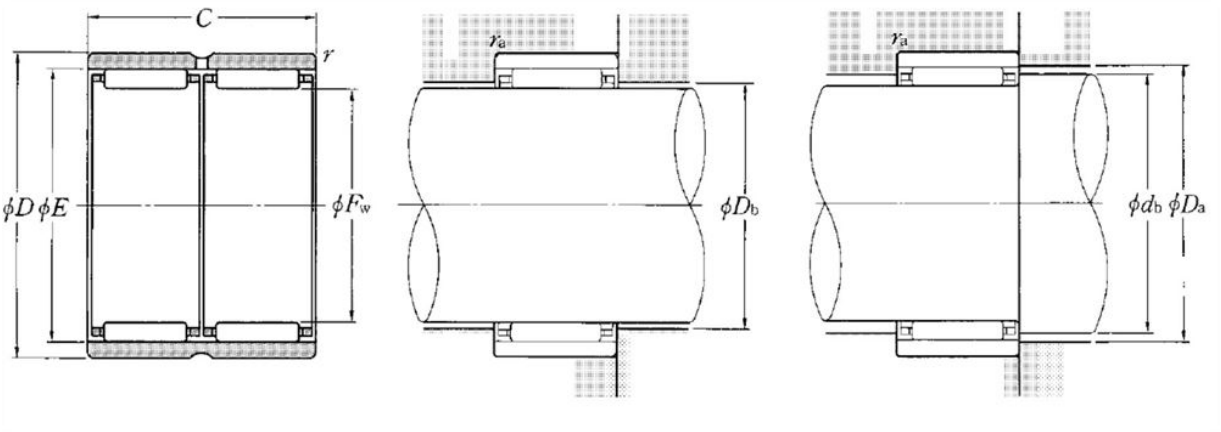


## Product definition

| | |
|---|---|
| **Fw** | 25 mm |
| **D** | 35 mm |
| **C** | 26 mm |
| **E** | 29 mm |
| **rs min** | 0.3 mm |
| **Dw** | 2 mm |
| **Lw** | 9.8 mm |
| **Lubrication hole on outer ring** | Oui/Yes |
| **k** | 2.5 mm |
| **Radial clearance class** | CN |
| **Precision class** | P0 |
| **Mass** | 0.08 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Cr** | 18.4 kN |
| **C0r** | 33.5 kN |
| **Nlim (grease)** | 11,000 Tr/min |
| **Nlim (oil)** | 16,000 Tr/min |
| **Min operating temperature, Tmin** | -20 °C |
| **Max operating temperature, Tmax** | 120 °C |
| **Characteristic cage frequency, FTF** | 0.46 Hz |
| **Characteristic rolling element frequency, BSF** | 13.43 Hz |
| **Characteristic outer ring frequency, BPF0** | 10.18 Hz |
| **Characteristic inner ring frequency, BPFI** | 11.82 Hz |

## Abutment dimensions

| | |
|---|---|
| **db** | 28.4 mm |
| **Da max** | 33 mm |
| **Db** | 25.6 mm |
| **ras max** | 0.3 mm |