Technical datasheet


10R71924CVUJ84

High precision angular contact ball bearings



High precision angular contact ball bearing, laminated resin cage centred on outer ring

Visual(s)

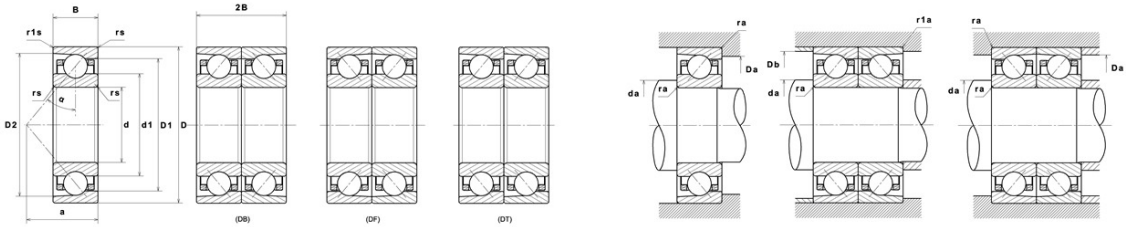

Product definition

d	120 mm
D	165 mm
B	22 mm
d1	134.3 mm
D1	150.65 mm
D2	157.34 mm
a	30 mm
Contact angle α	15 °
rs min	0.6 mm
r1s min	0.6 mm
f0	16.6
Precision class	P4
Mass	1.18 kg
Brand	SNR

Product performance

Dynamic load, C	67.3 kN
Static load, C0	78.8 kN
Fatigue limit load, Cu	3.5 kN
Nlim (oil)	12,500 rpm
Nlim (grease)	8,100 rpm
Axial displacement K Factor	0.84
Preload level	8
Preload value	1.03 kN
Axial rigidity	196 N/µm
Radial rigidity	1,000 N/µm
Min operating temperature, Tmin	-30 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10.47 Hz
Characteristic outer ring frequency, BPF0	12.26 Hz
Characteristic inner ring frequency, BPFI	14.74 Hz

Abutment dimensions

da min	124.5 mm
db min	124.5 mm
Da max	160.5 mm
Db max	160.5 mm
r1a max	0.6 mm
ra max	0.6 mm
D6	138.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

Series				e	Single or DT bearing arrangement				DB or DF arrangement			
					Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
					X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)		15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
			0.357	0.4				1.4		1.57		2.28
			0.714	0.43				1.3		1.46		2.11
			1.07	0.46				1.23		1.38		2
			1.43	0.47				1.19		1.34		1.93
			2.14	0.5				1.12		1.26		1.82
			3.57	0.55				1.02		1.14		1.66
			5.35	0.56						1.12		1.63
			7.14	0.56				1		1.12		1.63
		25°		0.68			0.41	0.87		0.92	0.67	1.41
		30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X_0	Y_0	X_0	Y_0
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)		15°	0.5	0.46	1	0.92
		25°		0.38		0.76
		30°		0.33		0.66

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr