
Technical datasheet


5212NRZZG15


Double row angular contact ball bearings



Double row angular contact ball bearing, polyamide cage, snap ring and groove on outer diameter, shield on both sides

Visual(s)

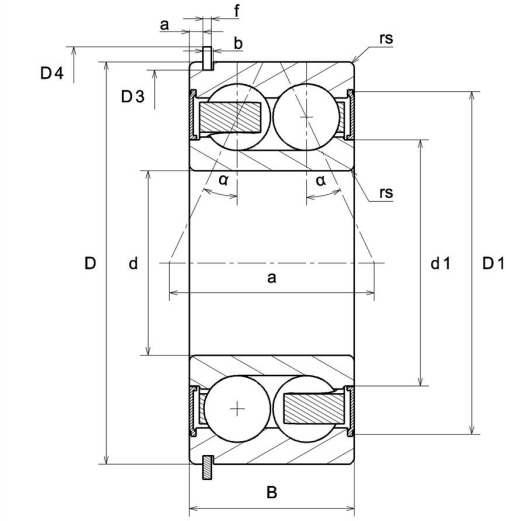

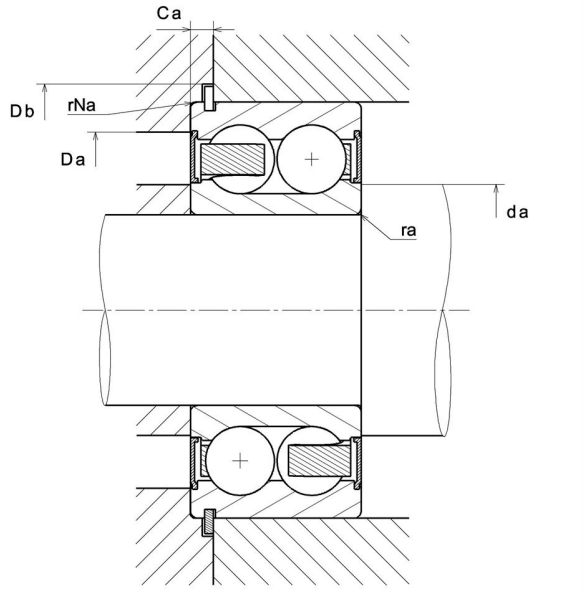

Product definition

d	60 mm
D	110 mm
B	36.5 mm
d1	75.8 mm
D1	98.6 mm
a	55.1 mm
Contact angle α	25 °
a min	3.07 mm
a max	3.28 mm
rs min	1.5 mm
rNs min	0.6 mm
D3 max	106.81 mm
b min	2.7 mm
b max	3 mm
r0 max	0.6 mm
D4 max	116.6 mm
f	2.41 mm
Snap ring reference	R 110
Radial clearance class	CN
Precision class	P0
Mass	1.18 kg
Brand	SNR

Product performance

Dynamic load, C	67 kN
Static load, C0	59.7 kN
Fatigue limit load, Cu	3.55 kN
f0	14.5
Nref	5,200 rpm
Nlim	4,600 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.49 Hz
Characteristic outer ring frequency, BPF0	4.2 Hz
Characteristic inner ring frequency, BPFI	5.8 Hz

Abutment dimensions

da min	68 mm
da max	75.8 mm
Da max	102 mm
Ca min	5.43 mm
Ca max	5.74 mm
ra max	1.5 mm
rNa max	0.6 mm
Db min	118 mm