# Technical data


## EX208AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by eccentric locking collar, AGR-sealing, for life lubrication

## Visual(s)

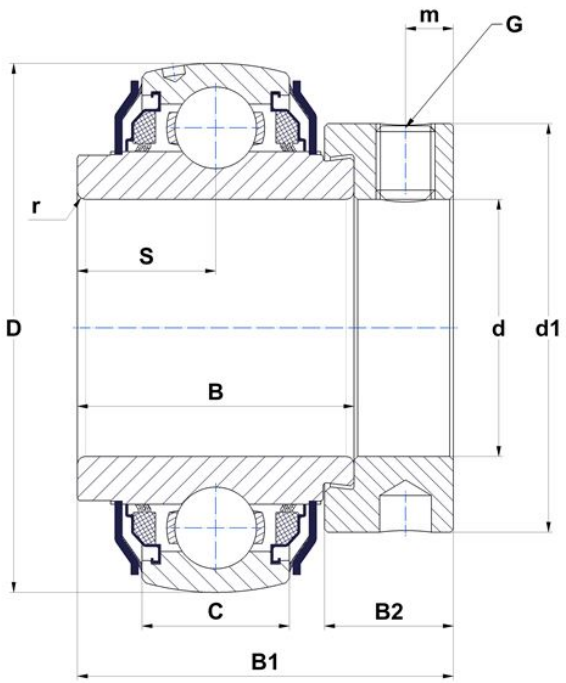


## Product definition

| | |
|---|---|
| **B** | 42.8 mm |
| **B1** | 56.3 mm |
| **B2** | 18.3 mm |
| **C** | 21 mm |
| **d** | 40 mm |
| **d1** | 58 mm |
| **D** | 80 mm |
| **G** | M8x1 |
| **m** | 6.5 mm |
| **r** | 1.1 |
| **S** | 21.4 mm |
| **SW** | 4 mm |