Technical data


EX212AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by eccentric locking collar, AGR-sealing, for life lubrication

Visual(s)

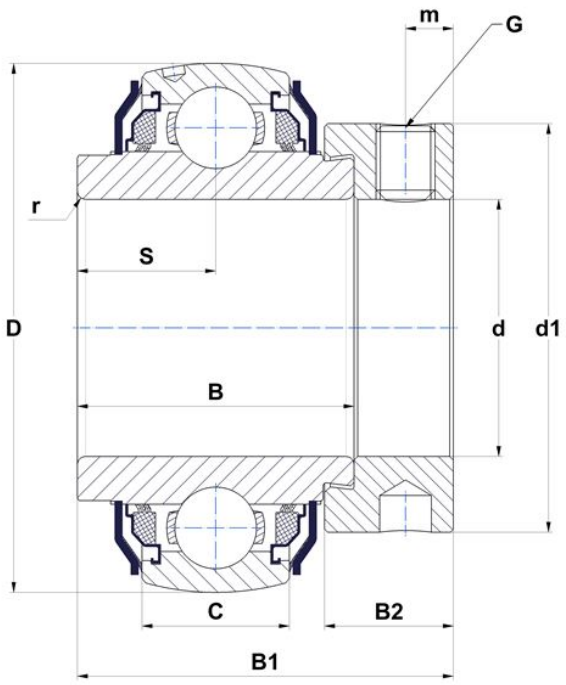

Product definition

B	61.8 mm
B1	77.7 mm
B2	22.3 mm
C	27 mm
d	60 mm
d1	82 mm
D	110 mm
G	M10x1,25
m	8 mm
r	1.5
S	30.9 mm
SW	5 mm

Product performance

C	52.5 kN
C0	32.8 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	1.67 kg
Recommended tightening torque for set screw	22 Nm