Technical data


LM67048/010


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

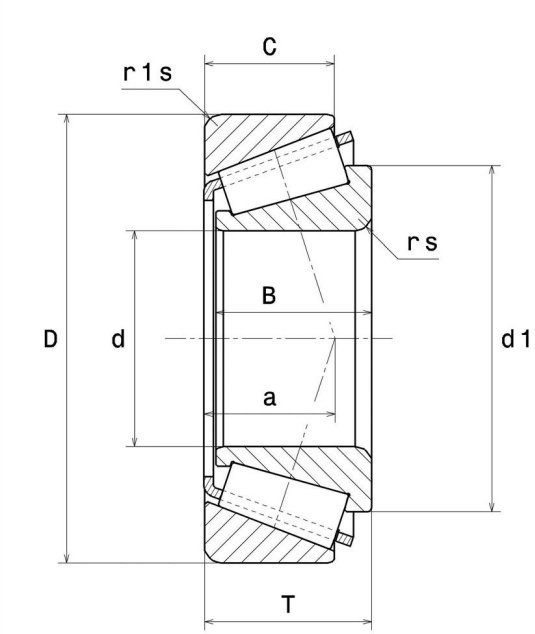

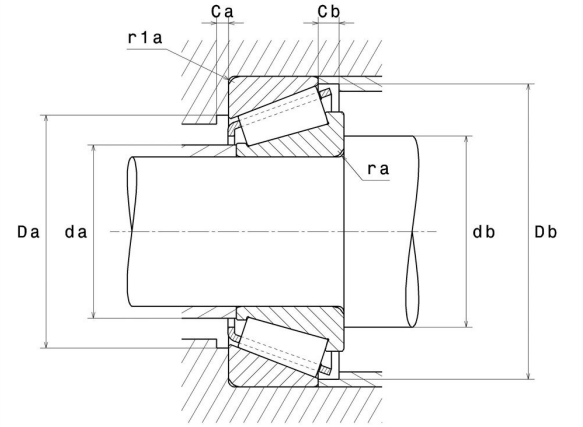

Product definition

d	31.75 mm
D	59.13 mm
B	16.76 mm
C	11.81 mm
T	15.88 mm
d1	45.5 mm
a	12.8 mm
rs min	3.6 mm
r1s min	1.3 mm
e	0.41
Y2	1.46
Y0	0.8
Mass	0.18 kg
Brand	SNR

Product performance

Dynamic load, C	35.5 kN
Rating life coefficient, A2	1
Static load, C0	42.4 kN
Fatigue limit load, Cu	5.2 kN
Nref	6,100 Tr/min
Nlim	12,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.18 Hz
Characteristic outer ring frequency, BPF0	8.25 Hz
Characteristic inner ring frequency, BPFI	10.75 Hz

Abutment dimensions

db min	47.75 mm
Da max	50.8 mm
ra max	2.5 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If Po <Fr, then use Po = Fr

The values for e, Y2 and Y0 are shown in the above table