
Technical data

UC206AGR

Insert bearings

zinc-coated insert, spherical outer diameter, fixing by socket set screw, AGR-sealing, for life lubrication

Visual(s)

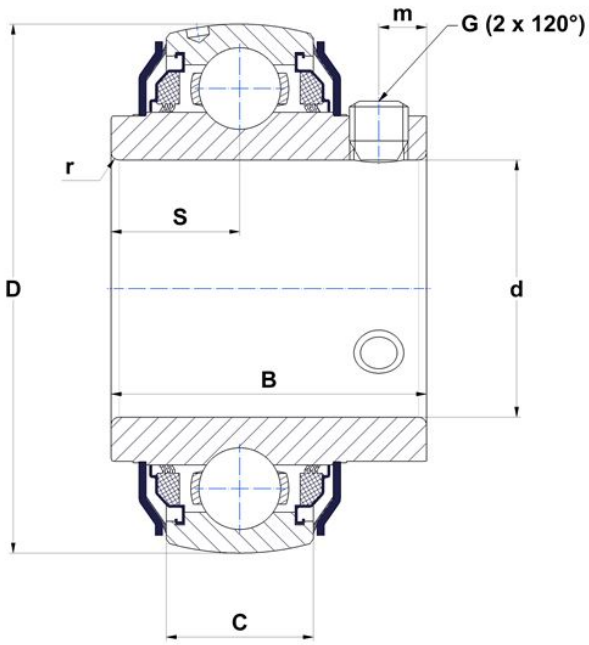

Product definition

B	39 mm
C	19 mm
d	30 mm
D	62 mm
G	M6x1
m	5.5 mm
r	0.6
S	15.9 mm
SW	3 mm

Product performance

C	19.5 kN
C0	11.2 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	0.32 kg
Recommended tightening torque for set screw	3.7 Nm