
# Technical data

## UC.206.G2L4

Insert bearings

zinc-coated insert, spherical outer diameter, fixing by socket set screw, L4 sealing system

## Visual(s)

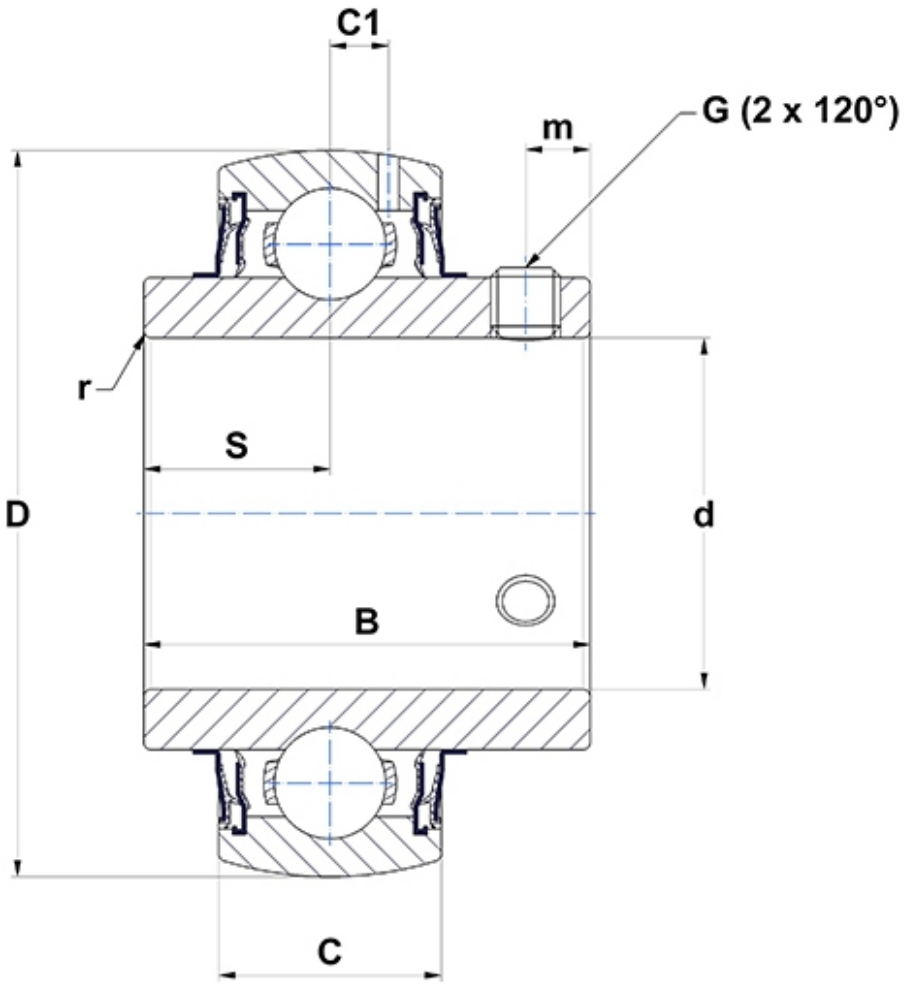

## Product definition

| | |
|---|---|
| **B** | 38.1 mm |
| **C** | 19 mm |
| **C1** | 5 mm |
| **d** | 30 mm |
| **D** | 62 mm |
| **G** | M6x1 |
| **m** | 5.5 mm |
| **r** | 0.6 |
| **S** | 15.9 mm |
| **SW** | 3 mm |

## Product performance

| | |
|---|---|
| **C** | 19.5 kN |
| **C0** | 11.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.32 kg |
| **Recommended tightening torque for set screw** | 5.5 Nm |