
Technical data

UC207AGR

Insert bearings

zinc-coated insert, spherical outer diameter, fixing by socket set screw, AGR-sealing, for life lubrication

Visual(s)

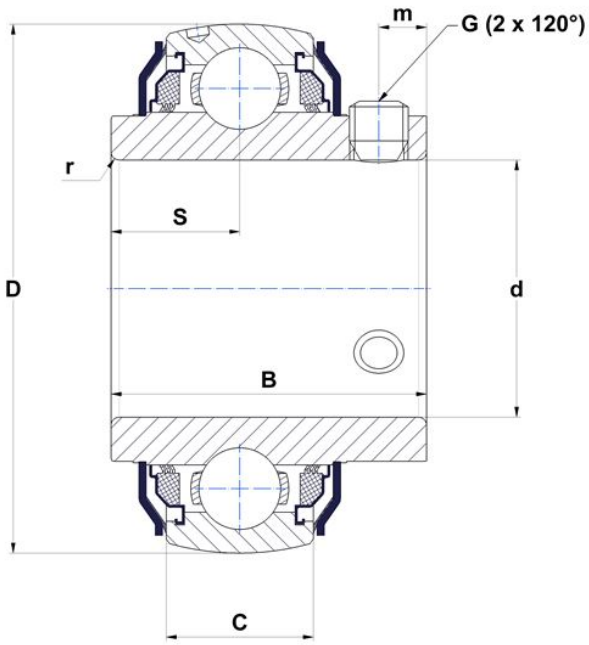

Product definition

B	42.9 mm
C	20 mm
d	35 mm
D	72 mm
G	M8x1
m	6.5 mm
r	1.1
S	17.5 mm
SW	4 mm

Product performance

C	25.7 kN
C0	15.2 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	0.5 kg
Recommended tightening torque for set screw	11.5 Nm