


Technical data

NK21/20R+1R17X21X20

Needle roller bearing, machined-ring, with inner ring

Needle roller bearing, machined-rings, with inner ring, double-side ribs, lubrication hole

Visual(s)

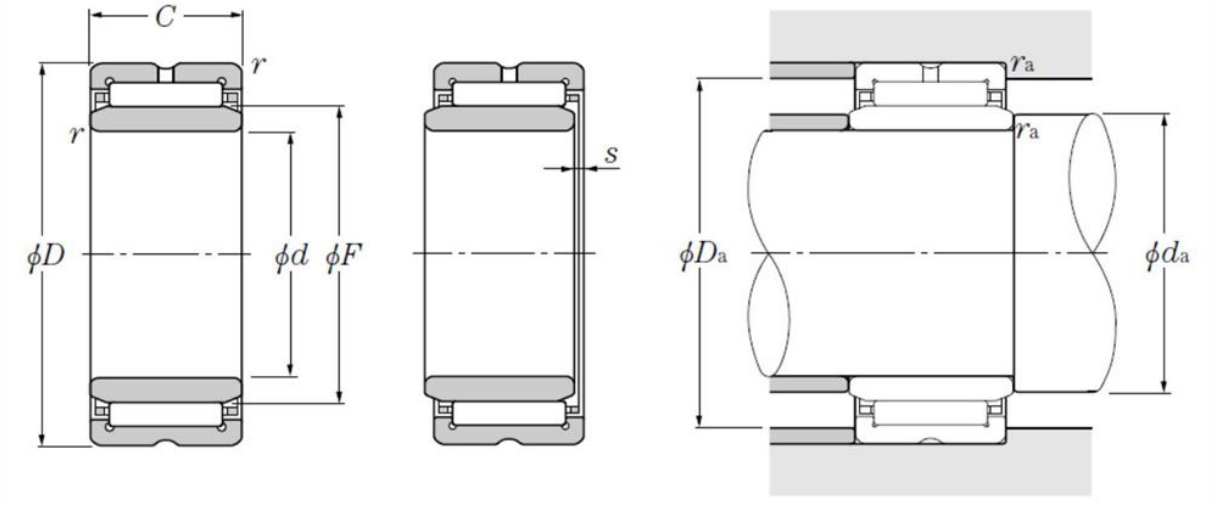

Product definition

d	17 mm
D	29 mm
C	20 mm
F	21 mm
rs min	0.3 mm
s max	0.5 mm
Dw	2.5 mm
Lw	16.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Inner ring reference	1R17X21X20
Lubrication hole on inner ring	Non/No
Radial clearance class	CN
Precision class	P0
Mass	0.05 kg
Brand	NTN

Product performance

Cr	17.4 kN
C0r	25.4 kN
Nlim (grease)	13,000 Tr/min
Nlim (oil)	19,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.29 Hz
Characteristic outer ring frequency, BPF0	7.6 Hz
Characteristic inner ring frequency, BPFI	9.4 Hz

Abutment dimensions

da min	19 mm
Da max	27 mm
ras max	0.3 mm